

Gearcase

	AD	C	SA	OA
C 70 2, C 70 3	10.315	25.89	8.189	14.094
	262	657.5	208	358
C 70 4	10.315	23.37	8.189	14.094
	262	593.5	208	358

Flange


AF	AJ	AK	BB	BD	BF	GA
11.811	11.811	9.843	0.197	13.780	0.709	0.669
300	300	250	5	350	18	17
11.811	11.811	9.843	0.197	13.780	0.709	0.669
300	300	250	5	350	18	17

Output shaft

	U	UY	V	Key	M
C 70 2, C 70 3, C 70 4	2.362	2.520	4.724	18x11x90	M20x42 [mm]
	60	64	120		

Input shaft (Optional metric series / Inch series)

	FU	FZ	FV	Key	FM	Weight [lbs / kg]
C 70 2, C 70 3	1.654	1.772	4.331	12x8x90	M12x28 [mm]	238 / 106
	42	45	110			
C 70 4	1.000	1.110	1.970	1/4 x 1/4 x 1 3/4	M8x19 [mm]	207 / 94

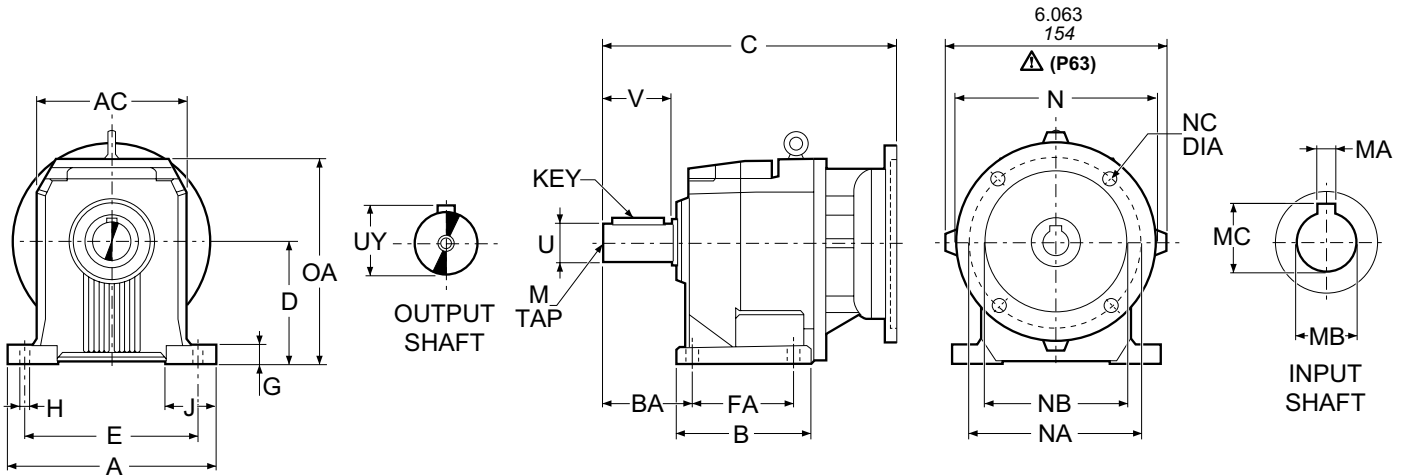

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 70 2, C 70 3, C 70 4	13.780	10.315	8.740	5.709	8.268	11.811	6.496	1.181	0.866	3.346	13.740
	350	262	222	145	210	300	165	30	22	85	349

Output shaft

	U	UY	V	Key	M
C 70 2, C 70 3, C 70 4	2.362	2.520	4.724	18x11x90	M20x42 [mm]
P	60	64	120		

IEC Flange


	N	NA	NB	NC	Weight [lbs / kg]
P63	140	115	95	M8x19	200 / 91
P71	160	130	110	M8x16	200 / 91
P80, P90	200	165	130	M10x12	202 / 92
P100, P112	250	215	180	M12x16	211 / 96
P132	300	265	230	14	216 / 98
P160, P180	350	300	250	18	235 / 107
P200	400	350	300	M16x25	284 / 129

Hollow input shaft

	MA	MB	MC
P63	4	11	12.8
P71	5	14	16.3
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3

	C					
	P63 P71	P80 P90	P100 P112	P132	P160 P180	P200
C 70 2, C 70 3	—	18.62 473	19.02 483	20.45 519.5	22.64 575	23.62 600
C 70 4	19.86 504.5	20.63 524	21.02 534	22.46 570.5	—	—

Dimensions are $\frac{\text{inch}}{\text{mm}}$

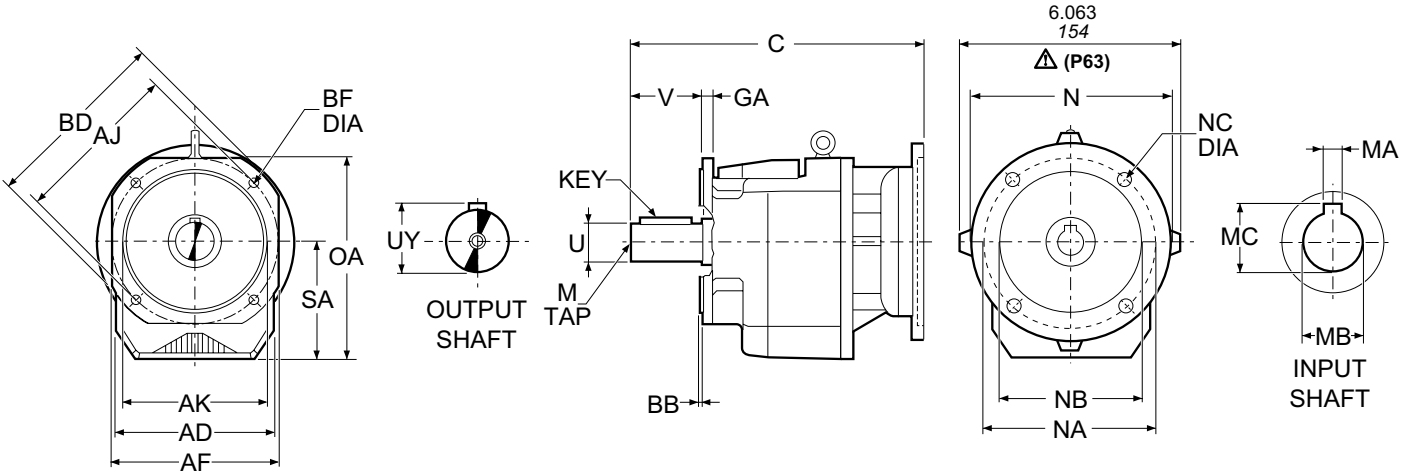

Gearcase

	AD	SA	OA
C 70 2, C 70 3, C 70 4	10.315	8.189	14.094
	262	208	358

Flange

AF	AJ	AK	BB	BD	BF	GA
11.811	11.811	9.843	0.197	13.780	0.709	0.669
300	300	250	5	350	18	17

Output shaft

	U	UY	V	Key	M
C 70 2, C 70 3, C 70 4 F	2.362 +0 -0.0007 60 +0 -0.019	2.520 64	4.724 120	18x11x90	M20x42 [mm]

IEC Flange




	N	NA	NB	NC	Weight [lbs / kg]
P63	140	115	95	M8x19	200 / 91
P71	160	130	110	M8x16	200 / 91
P80, P90	200	165	130	M10x12	202 / 92
P100, P112	250	215	180	M12x16	211 / 96
P132	300	265	230	14	216 / 98
P160, P180	350	300	250	18	235 / 107
P200	400	350	300	M16x25	284 / 129

Hollow input shaft

	MA	MB	MC
P63	4	11	12.8
P71	5	14	16.3
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3

	C					
	P63 P71	P80 P90	P100 P112	P132	P160 P180	P200
C 70 2, C 70 3	—	18.62 473	19.02 483	20.45 519.5	22.64 575	23.62 600
C 70 4	19.86 504.5	20.63 524	21.02 534	22.46 570.5	—	—

Dimensions are $\frac{\text{inch}}{\text{mm}}$

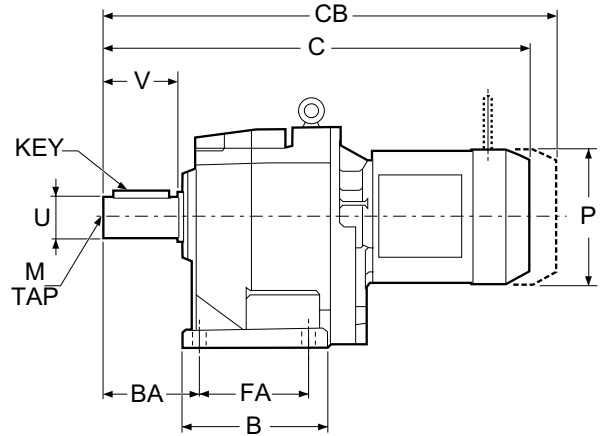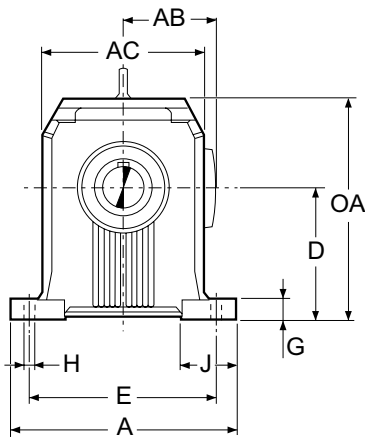

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 80 2, C 80 3, C 80 4	17.323 440	12.598 320	10.906 277	6.811 173	9.843 250	14.567 370	8.268 210	1.378 35	1.024 26	4.331 110	16.535 420

Output shaft




	U	UY	V	Key	M
C 80 2, C 80 3, C 80 4 P	3.150 80	⁺⁰ _{-0.0007} 3.346 ⁺⁰ _{-0.019} 85	5.512 140	22x14x110	M20x42 [mm]

Motor



	AB	C	CB	P	Weight [lbs / kg]
C 80 2_S3 M3S	5.591	29.23	33.01	7.677	321 / 146
C 80 3_S3 M3S	142	742.5	838.5	195	
C 80 2_S3 M3L	5.591	30.49	34.08	7.677	337 / 153
C 80 3_S3 M3L	142	774.5	865.5	195	
C 80 2_S4 M4S	7.598	33.25	37.54	10.157	392 / 178
C 80 3_S4 M4S	193	844.5	953.5	258	
C 80 2_S4 M4L	7.598	34.74	39.04	10.157	431 / 196
C 80 3_S4 M4L	193	882.5	991.5	258	
C 80 2_S4 M4LC	7.598	36.12	40.02	10.157	449 / 204
C 80 3_S4 M4LC	193	917.5	1017	258	
C 80 2_S5 M5S	9.646	38.15	43.66	12.205	524 / 238
C 80 3_S5 M5S	245	969	1109	310	
C 80 2_S5 M5L	9.646	39.88	45.39	12.205	559 / 254
C 80 3_S5 M5L	245	1013	1153	310	
C 80 4_S1 M1S	4.252	27.93	30.41	5.433	297 / 135
	108	709.5	772.5	138	
C 80 4_S1 M1L	4.252	28.88	31.28	5.433	299 / 136
	108	733.5	794.5	138	
C 80 4_S2 M2S	4.685	30.02	32.78	6.142	310 / 141
	119	762.5	832.5	156	
C 80 4_S3 M3S	5.591	31.71	35.49	7.677	328 / 149
	142	805.5	901.5	195	
C 80 4_S3 M3L	5.591	32.97	36.56	7.677	343 / 156
	142	837.5	928.5	195	
C 80 4_S4 M4S	7.598	35.73	40.02	10.157	400 / 182
	193	907.5	1017	258	
C 80 4_S4 M4L	7.598	37.22	41.52	10.157	442 / 201
	193	945.5	1055	258	

Dimensions are $\frac{\text{inch}}{\text{mm}}$

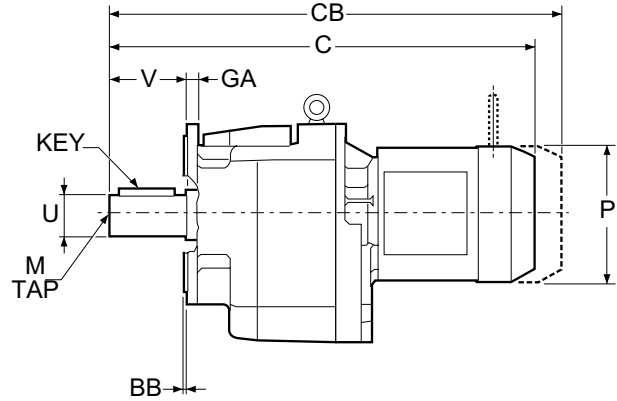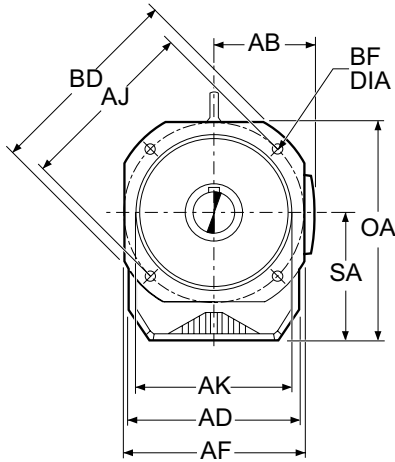

Gearcase

	AD	SA	OA
C 80 2, C 80 3, C 80 4	12.598	9.724	16.614
	320	247	422

Flange

AF	AJ	AK	BB	BD	BF	GA
13.780	13.780	11.811	0.197	15.748	0.709	0.787
350	350	300	5	400	18	20

Output shaft


	U	UY	V	Key	M
C 80 2, C 80 3, C 80 4 F	3.150 80	3.346 85	5.512 140	22x14x110	M20x42 [mm]

Motor



	AB	C	CB	P	Weight [lbs / kg]
C 80 2_S3 M3S	5.591	29.23	33.01	7.677	321 / 146
C 80 3_S3 M3S	142	742.5	838.5	195	
C 80 2_S3 M3L	5.591	30.49	34.08	7.677	337 / 153
C 80 3_S3 M3L	142	774.5	865.5	195	
C 80 2_S4 M4S	7.598	33.25	37.54	10.157	392 / 178
C 80 3_S4 M4S	193	844.5	953.5	258	
C 80 2_S4 M4L	7.598	34.74	39.04	10.157	431 / 196
C 80 3_S4 M4L	193	882.5	991.5	258	
C 80 2_S4 M4LC	7.598	36.12	40.02	10.157	449 / 204
C 80 3_S4 M4LC	193	917.5	1017	258	
C 80 2_S5 M5S	9.646	38.15	43.66	12.205	524 / 238
C 80 3_S5 M5S	245	969	1109	310	
C 80 2_S5 M5L	9.646	39.88	45.39	12.205	559 / 254
C 80 3_S5 M5L	245	1013	1153	310	
C 80 4_S1 M1S	4.252	27.93	30.41	5.433	297 / 135
	108	709.5	772.5	138	
C 80 4_S1 M1L	4.252	28.88	31.28	5.433	299 / 136
	108	733.5	794.5	138	
C 80 4_S2 M2S	4.685	30.02	32.78	6.142	310 / 141
	119	762.5	832.5	156	
C 80 4_S3 M3S	5.591	31.71	35.49	7.677	328 / 149
	142	805.5	901.5	195	
C 80 4_S3 M3L	5.591	32.97	36.56	7.677	343 / 156
	142	837.5	928.5	195	
C 80 4_S4 M4S	7.598	35.73	40.02	10.157	400 / 182
	193	907.5	1017	258	
C 80 4_S4 M4L	7.598	37.22	41.52	10.157	442 / 201
	193	945.5	1055	258	

Dimensions are $\frac{\text{inch}}{\text{mm}}$

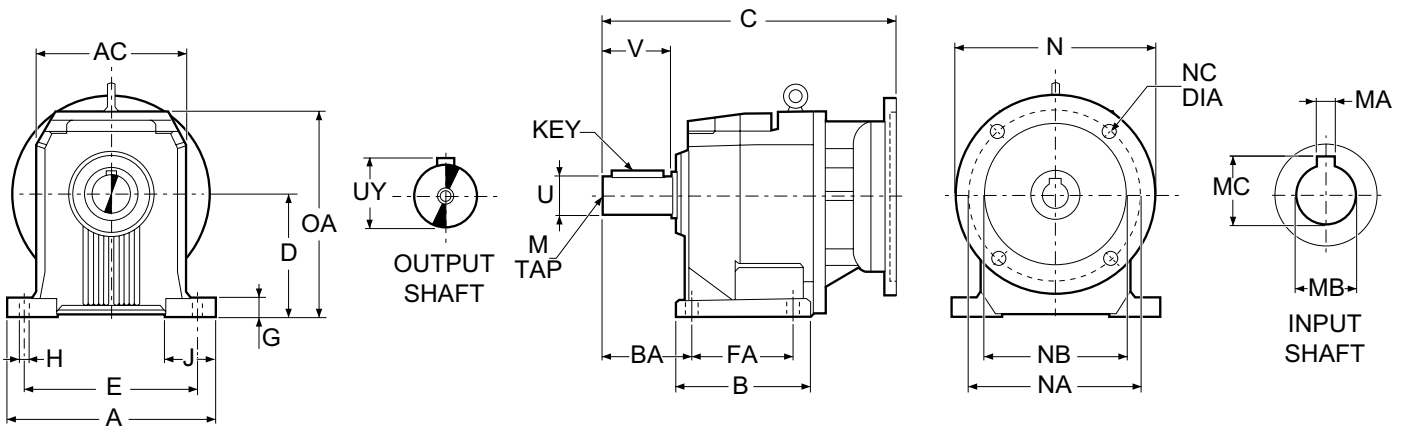

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 80 2, C 80 3, C 80 4	17.323	12.598	10.906	6.811	9.843	14.567	8.268	1.378	1.024	4.331	16.535
	440	320	277	173	250	370	210	35	26	110	420

Output shaft

	U	UY	V	Key	M
C 80 2, C 80 3, C 80 4	3.150	3.346	5.512	22x14x110	M20x42 [mm]
P	80	85	140		

NEMA Flange




	N	NA	NB	NC	Weight [lbs / kg]
N56C	6.496	5.875	4.500	0.394	304 / 138
N140TC	6.496	5.875	4.500	0.394	309 / 140
N180TC	8.996	7.250	8.500	0.551	318 / 144
N210TC	8.996	7.250	8.500	0.551	322 / 146
N250TC	13.780	7.250	8.500	0.551	340 / 154
N280TC	13.780	9.000	10.500	0.551	340 / 154
N320TC	17.717	11.000	12.500	0.669	388 / 176

Hollow input shaft

	MA	MB	MC
N56C	0.188	0.625	0.710
N140TC	0.188	0.875	0.964
N180TC	0.250	1.125	1.241
N210TC	0.312	1.375	1.518
N250TC	0.375	1.625	1.796
N280TC	0.500	1.875	2.102
N320TC	0.500	2.125	2.350

	C						
	N56C	N140TC	N180TC	N210TC	N250TC	N280TC	N320TC
C 80 2	—	—	21.58 548	23.03 585	25.98 660	26.18 665	29.04 737.5
C 80 3	—	—	21.58 548	23.03 585	25.98 660	26.18 665	29.04 737.5
C 80 4	22.74 577.5	22.74 577.5	24.056 611	25.30 642.5	—	—	—

Dimensions are $\frac{\text{inch}}{\text{mm}}$

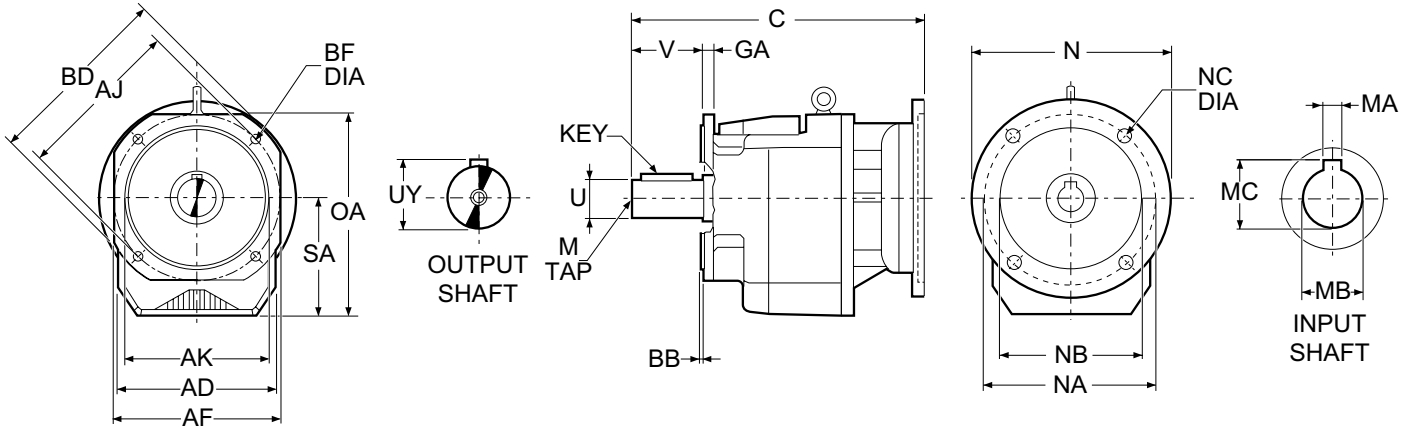

Gearcase

	AD	SA	OA
C 80 2, C 80 3, C 80 4	12.598	9.724	16.614
	320	247	422

Flange

AF	AJ	AK	BB	BD	BF	GA
13.780	13.780	11.811	0.197	15.748	0.709	0.787
350	350	300	5	400	18	20

Output shaft

	U	UY	V	Key	M
C 80 2, C 80 3, C 80 4	3.150	3.346	5.512	22x14x110	M20x42 [mm]
F	80	85	140		

NEMA Flange




	N	NA	NB	NC	Weight [lbs / kg]
N56C	6.496	5.875	4.500	0.394	304 / 138
N140TC	6.496	5.875	4.500	0.394	309 / 140
N180TC	8.996	7.250	8.500	0.551	318 / 144
N210TC	8.996	7.250	8.500	0.551	322 / 146
N250TC	13.780	7.250	8.500	0.551	340 / 154
N280TC	13.780	9.000	10.500	0.551	340 / 154
N320TC	17.717	11.000	12.500	0.669	388 / 176

Hollow input shaft

	MA	MB	MC
N56C	0.188	0.625	0.710
N140TC	0.188	0.875	0.964
N180TC	0.250	1.125	1.241
N210TC	0.312	1.375	1.518
N250TC	0.375	1.625	1.796
N280TC	0.500	1.875	2.102
N320TC	0.500	2.125	2.350

	C						
	N56C	N140TC	N180TC	N210TC	N250TC	N280TC	N320TC
C 80 2	—	—	21.58 548	23.03 585	25.98 660	26.18 665	29.04 737.5
C 80 3	—	—	21.58 548	23.03 585	25.98 660	26.18 665	29.04 737.5
C 80 4	22.74 577.5	22.74 577.5	24.056 611	25.30 642.5	—	—	—

Dimensions are $\frac{\text{inch}}{\text{mm}}$

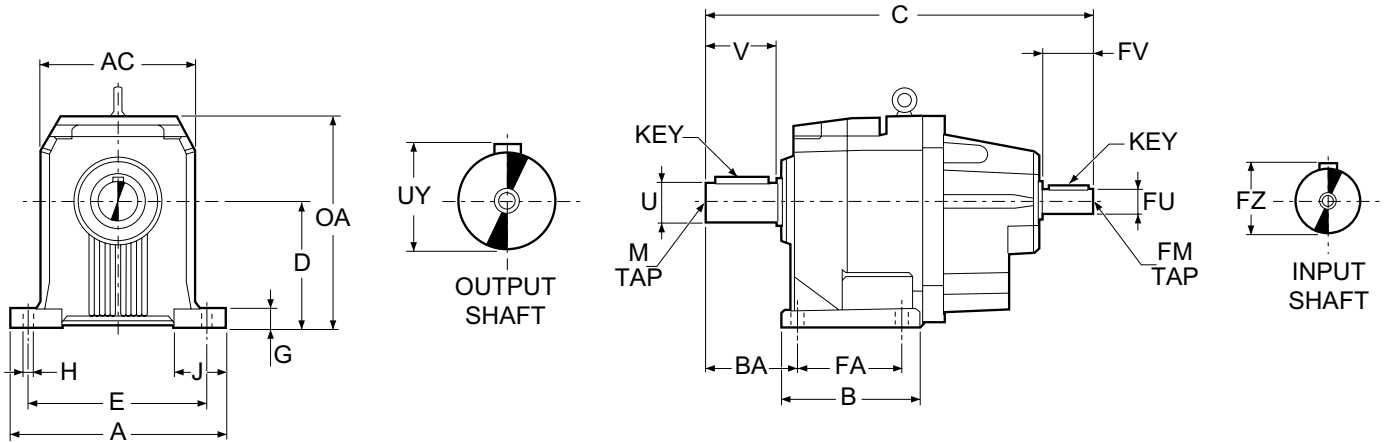

Gearcase


	A	AC	B	BA	C	D	E	FA	G	H	J	OA
C 80 2, C80 3	17.323	12.598	10.906	6.811	28.29	9.843	14.567	8.268	1.378	1.024	4.331	16.535
	440	320	277	173	718.5	250	370	210	35	26	110	420
C 80 4	17.323	12.598	10.906	6.811	26.24	9.843	14.567	8.268	1.378	1.024	4.331	16.535
	440	320	277	173	666.5	250	370	210	35	26	110	420

Output shaft

	U	UY	V	Key	M
C 80 2, C 80 3, C 80 4 P	3.150 ⁺⁰ _{-0.0007}	3.346	5.512	22x14x110	M20x42 [mm]
	80 ⁺⁰ _{-0.019}	85	140		

Input shaft (Optional metric series / Inch series)

	FU	FZ	FV	Key	FM	Weight [lbs / kg]
C 80 2, C 80 3 HS	1.654 ⁺⁰ _{-0.0007}	1.772	4.331	12x8x90	M12x28 [mm]	339 / 154
	42 ⁺⁰ _{-0.019}	45	110			
C 80 4 NHS	1.000 ⁺⁰ _{-0.0005}	1.110	1.970	1/4 x 1/4 x 1 3/4	M8x19 [mm]	310 / 141

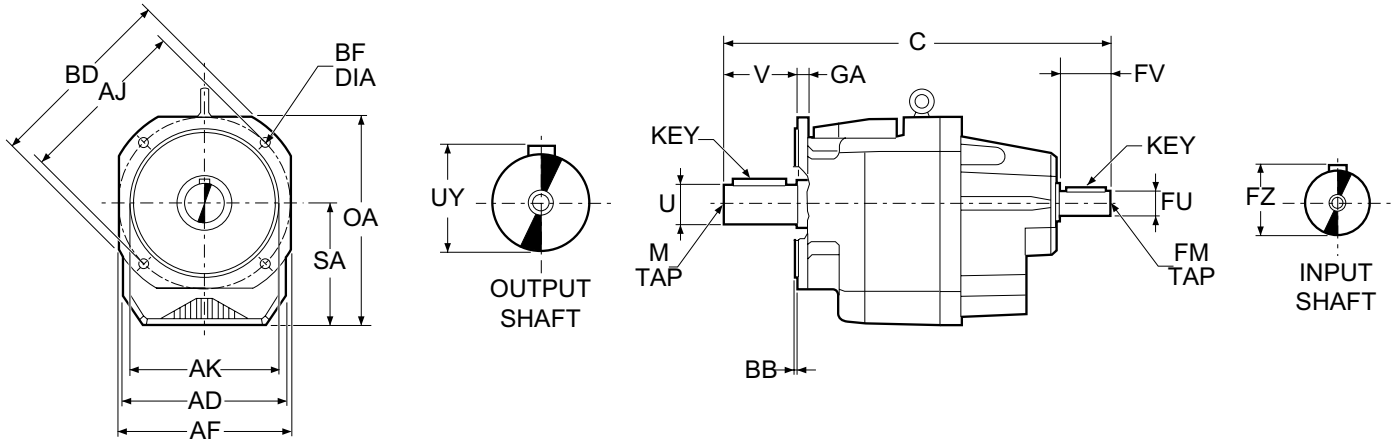

Gearcase

	AD	C	SA	OA
C 80 2, C 80 3	12.598	28.29	9.724	16.614
	320	718.5	247	422
C 80 4	12.598	26.24	9.724	16.614
	320	666.5	247	422

Flange



AF	AJ	AK	BB	BD	BF	GA
13.780	13.780	11.811	0.197	15.748	0.709	0.787
350	350	300	5	400	18	20
13.780	13.780	11.811	0.197	15.748	0.709	0.787
350	350	300	5	400	18	20

Output shaft

	U	UY	V	Key	M
C 80 2, C 80 3, C 80 4	3.150	3.346	5.512	22x14x110	M20x42 [mm]
	80	85	140		

Input shaft (Optional metric series / Inch series)

	FU	FZ	FV	Key	FM	Weight [lbs / kg]
C 80 2, C 80 3	1.654	1.772	4.331	12x8x90	M12x28 [mm]	339 / 154
	42	45	110			
C 80 4	1.000	1.110	1.970	1/4 x 1/4 x 1 3/4	M8x19 [mm]	310 / 141

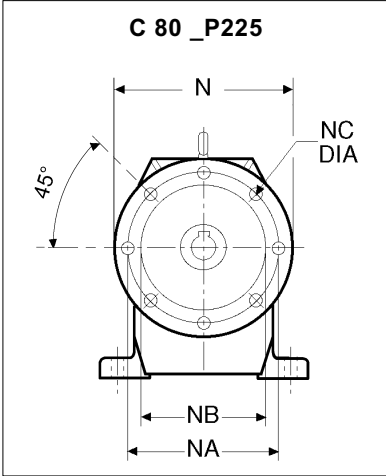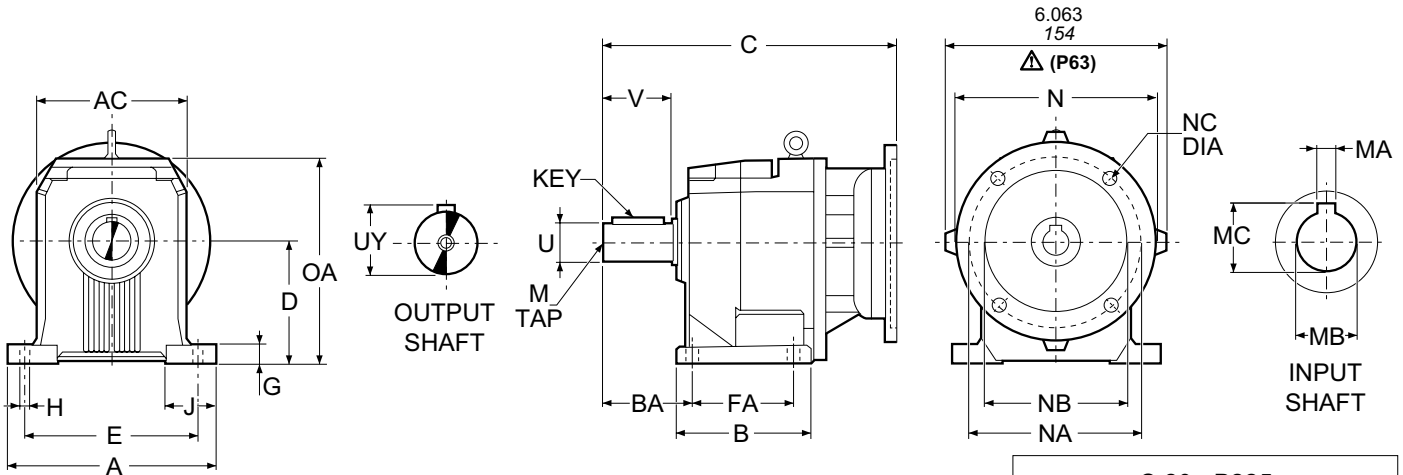

	C						
	P63 P71	P80 P90	P100 P112	P132	P160 P180	P200	P225
C 80 2, C 80 3	—	20.98 533	21.38 543	22.82 579.5	25.00 635	25.98 660	27.78 705.5
C 80 4	22.70 576.5	23.47 596	23.86 606	25.30 642.5	—	—	—

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 80 2, C 80 3, C 80 4	17.323 440	12.598 320	10.906 277	6.811 173	9.843 250	14.567 370	8.268 210	1.378 35	1.024 26	4.331 110	16.535 420

Output shaft

	U	UY	V	Key	M	
C 80 2, C 80 3, C 80 4 P	3.150 80	⁺⁰ _{-0.0007} ⁺⁰ _{-0.019}	3.346 85	5.512 140	22x14x110	M20x42 [mm]

IEC Flange



	N	NA	NB	NC	Weight [lbs / kg]
P63	140	115	95	M8x19	304 / 138
P71	160	130	110	M8x16	304 / 138
P80, P90	200	165	130	M10x12	308 / 140
P100, P112	250	215	180	M12x16	317 / 144
P132	300	265	230	14	321 / 146
P160, P180	350	300	250	18	339 / 154
P200	400	350	300	M16x25	387 / 176
P225	450	400	350	18	392 / 178



Hollow input shaft

	MA	MB	MC
P63	4	11	12.8
P71	5	14	16.3
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3
P225	18	60	64.4

Dimensions are $\frac{\text{inch}}{\text{mm}}$

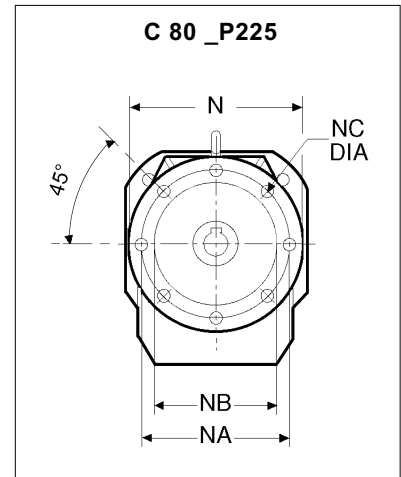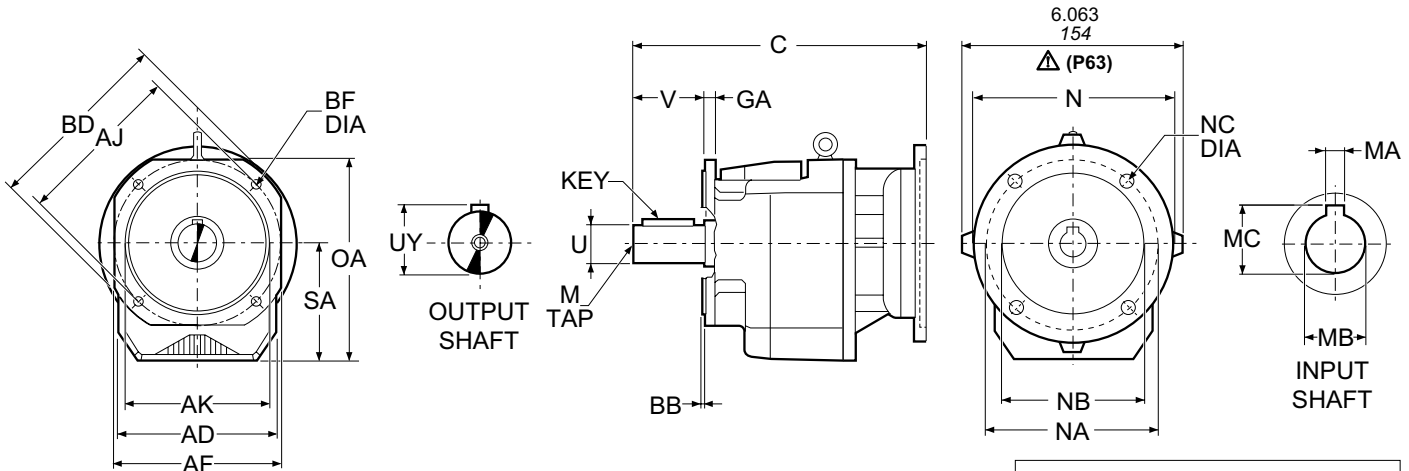

	C						
	P63 P71	P80 P90	P100 P112	P132	P160 P180	P200	P225
C 80 2, C 80 3	—	20.98 533	21.38 543	22.82 579.5	25.00 635	25.98 660	27.78 705.5
C 80 4	22.70 576.5	23.47 596	23.86 606	25.30 642.5	—	—	—

Gearcase

	AD	SA	OA
C 80 2, C 80 3, C 80 4	12.598	9.724	16.614
	320	247	422

Flange

AF	AJ	AK	BB	BD	BF	GA
13.780	13.780	11.811	0.197	15.748	0.709	0.787
350	350	300	5	400	18	20

Output shaft

	U	UY	V	Key	M
C 80 2, C 80 3, C 80 4	3.150 +0 -0.0007 80 +0 -0.019	3.346	5.512 140	22x14x110	M20x42 [mm]




IEC Flange

	N	NA	NB	NC	Weight [lbs / kg]
P63	140	115	95	M8x19	304 / 138
P71	160	130	110	M8x16	304 / 138
P80, P90	200	165	130	M10x12	308 / 140
P100, P112	250	215	180	M12x16	317 / 144
P132	300	265	230	14	321 / 146
P160, P180	350	300	250	18	339 / 154
P200	400	350	300	M16x25	387 / 176
P225	450	400	350	18	392 / 178

Hollow input shaft

	MA	MB	MC
P63	4	11	12.8
P71	5	14	16.3
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3
P225	18	60	64.4

Dimensions are $\frac{\text{inch}}{\text{mm}}$

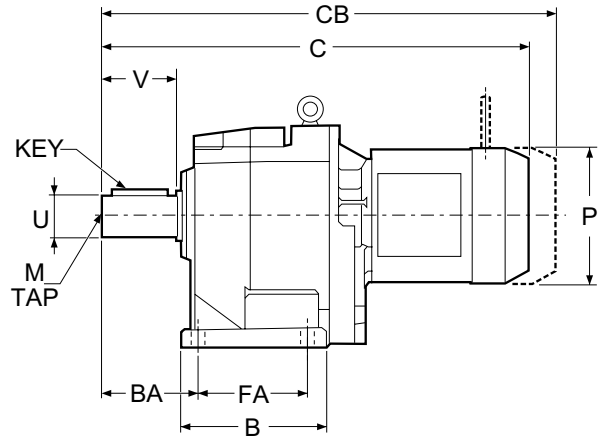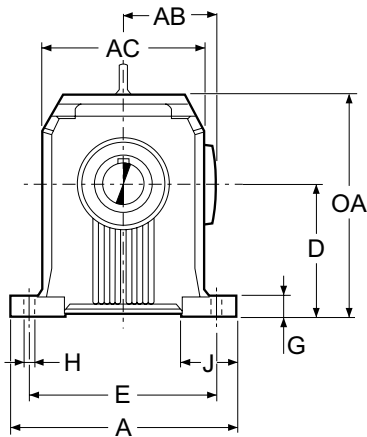

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 90 2, C 90 3, C 90 4	20.472 520	14.764 375	13.346 339	8.268 210	11.811 300	17.323 440	9.843 250	1.575 40	1.299 33	5.512 140	19.488 495

Output shaft




	U	UY	V	Key	M
C 90 2, C 90 3, C 90 4	3.543 90	⁺⁰ -0.0009 3.740 ⁺⁰ -0.022 95	6.693 170	25x14x140	M20x42 [mm]

Motor



	AB	C	CB	P	Weight [lbs / kg]
C 90 2_S3 M3S	5.591	33.54	37.32	7.677	519 / 236
C 90 3_S3 M3S	142	852	948	195	
C 90 2_S3 M3L	5.591	34.80	38.39	7.677	535 / 243
C 90 3_S3 M3L	142	884	975	195	
C 90 2_S4 M4S	7.598	37.56	41.85	10.157	592 / 269
C 90 3_S4 M4S	193	954	1063	258	
C 90 2_S4 M4L	7.598	39.06	43.35	10.157	634 / 288
C 90 3_S4 M4L	193	992	1101	258	
C 90 2_S4 M4LC	7.598	40.43	44.33	10.157	651 / 296
C 90 3_S4 M4LC	193	1027	1126	258	
C 90 2_S5 M5S	9.646	42.46	47.97	12.205	722 / 328
C 90 3_S5 M5S	245	1079	1219	310	
C 90 2_S5 M5L	9.646	44.19	49.71	12.205	757 / 344
C 90 3_S5 M5L	245	1123	1263	310	
C 90 4_S2 M2S	4.685 119	35.12 892	37.87 962	6.142 156	524 / 238
C 90 4_S3 M3S	5.591 142	36.81 935	40.59 1031	7.677 195	541 / 246
C 90 4_S3 M3L	5.591 142	38.07 967	41.65 1058	7.677 195	557 / 253
C 90 4_S4 M4S	7.598 193	40.83 1037	45.12 1146	10.157 258	614 / 279
C 90 4_S4 M4L	7.598 193	42.32 1075	46.61 1184	10.157 258	656 / 298

Dimensions are $\frac{\text{inch}}{\text{mm}}$

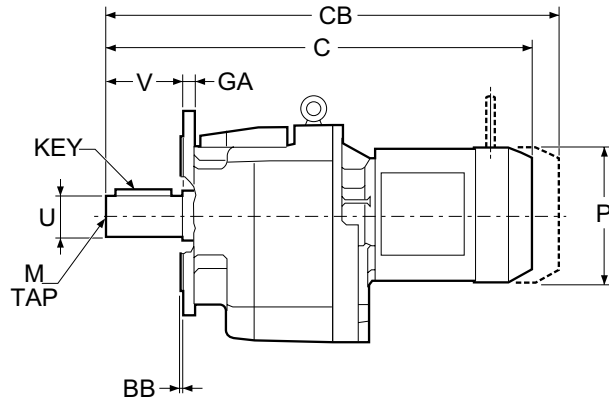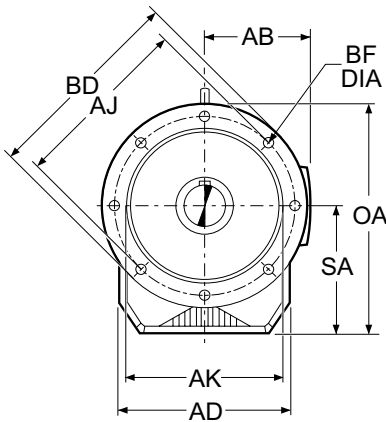

Gearcase

	AD	SA	OA
C 90 2, C 90 3, C 90 4	14.764	11.614	20.472
	375	295	520

Flange

AJ	AK	BB	BD	BF	GA
15.748	13.780	0.197	17.717	0.709	0.866
400	350	5	450	18	22

Output shaft


	U	UY	V	Key	M
C 90 2, C 90 3, C 90 4	3.543	3.740	6.693	25x14x140	M20x42 [mm]
	90	95	170		

Motor



	AB	C	CB	P	Weight [lbs / kg]
C 90 2_S3 M3S	5.591	33.54	37.32	7.677	519 / 236
C 90 3_S3 M3S	142	852	948	195	
C 90 2_S3 M3L	5.591	34.80	38.39	7.677	535 / 243
C 90 3_S3 M3L	142	884	975	195	
C 90 2_S4 M4S	7.598	37.56	41.85	10.157	592 / 269
C 90 3_S4 M4S	193	954	1063	258	
C 90 2_S4 M4L	7.598	39.06	43.35	10.157	634 / 288
C 90 3_S4 M4L	193	992	1101	258	
C 90 2_S4 M4LC	7.598	40.43	44.33	10.157	651 / 296
C 90 3_S4 M4LC	193	1027	1126	258	
C 90 2_S5 M5S	9.646	42.46	47.97	12.205	722 / 328
C 90 3_S5 M5S	245	1079	1219	310	
C 90 2_S5 M5L	9.646	44.19	49.71	12.205	757 / 344
C 90 3_S5 M5L	245	1123	1263	310	
C 90 4_S2 M2S	4.685	35.12	37.87	6.142	524 / 238
	119	892	962	156	
C 90 4_S3 M3S	5.591	36.81	40.59	7.677	541 / 246
	142	935	1031	195	
C 90 4_S3 M3L	5.591	38.07	41.65	7.677	557 / 253
	142	967	1058	195	
C 90 4_S4 M4S	7.598	40.83	45.12	10.157	614 / 279
	193	1037	1146	258	
C 90 4_S4 M4L	7.598	42.32	46.61	10.157	656 / 298
	193	1075	1184	258	

Dimensions are $\frac{\text{inch}}{\text{mm}}$

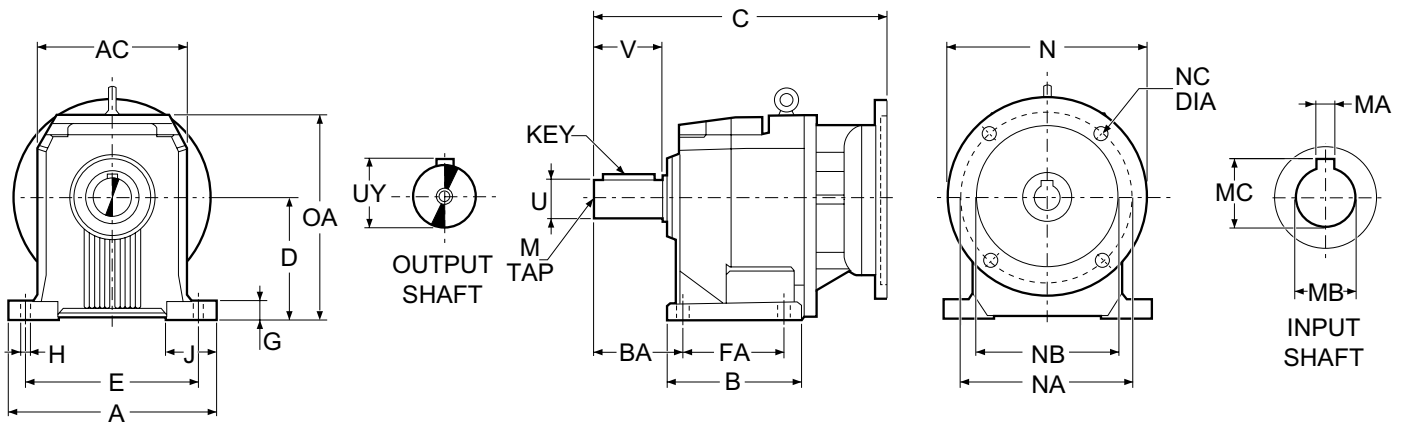

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 90 2, C 90 3, C 90 4	20.472 520	14.764 375	13.346 339	8.268 210	11.811 300	17.323 440	9.843 250	1.575 40	1.299 33	5.512 140	19.488 495

Output shaft

	U	UY	V	Key	M
C 90 2, C 90 3, C 90 4	3.543 90	3.740 95	6.693 170	25x14x140	M20x42 [mm]

NEMA Flange




	N	NA	NB	NC	Weight [lbs / kg]
N56C	6.496	5.875	4.500	0.394	520 / 236
N140TC	6.496	5.875	4.500	0.394	525 / 238
N180TC	8.996	7.250	8.500	0.551	534 / 242
N210TC	8.996	7.250	8.500	0.551	538 / 244
N250TC	13.780	7.250	8.500	0.551	547 / 248
N280TC	13.780	9.000	10.500	0.551	547 / 248
N320TC	17.717	11.000	12.500	0.669	600 / 272

Hollow input shaft

	MA	MB	MC
N56C	0.188	0.625	0.710
N140TC	0.188	0.875	0.964
N180TC	0.250	1.125	1.241
N210TC	0.312	1.375	1.518
N250TC	0.375	1.625	1.796
N280TC	0.500	1.875	2.102
N320TC	0.500	2.125	2.350

	C						
	N56C	N140TC	N180TC	N210TC	N250TC	N280TC	N320TC
C 90 2	—	—	25.93 658.5	27.38 695.5	30.37 771.5	30.57 776.5	33.43 849
C 90 3	—	—	25.93 658.5	27.38 695.5	30.37 771.5	30.57 776.5	33.43 849
C 90 4	28.66 728	28.66 728	29.19 741.5	30.65 778.5	33.45 849.5	33.64 854.5	—

Dimensions are $\frac{\text{inch}}{\text{mm}}$

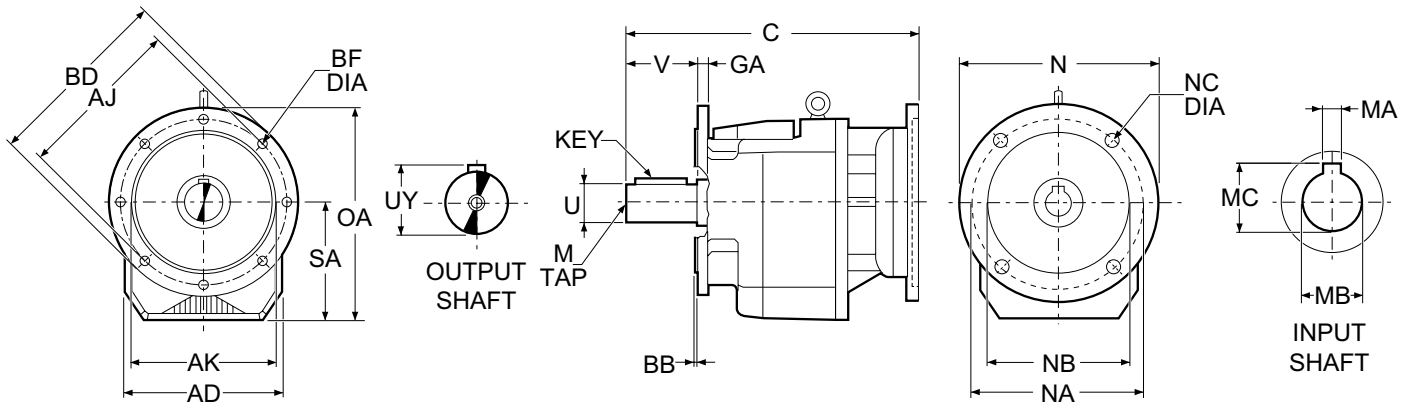

Gearcase

	AD	SA	OA
C 90 2, C 90 3, C 90 4	14.764	11.614	20.472
	375	295	520

Flange

AJ	AK	BB	BD	BF	GA
15.748	13.780	0.197	17.717	0.709	0.866
400	350	5	450	18	22

Output shaft

	U	UY	V	Key	M
C 90 2, C 90 3, C 90 4	3.543	3.740	6.693	25x14x140	M20x42 [mm]
F	90	95	170		

NEMA Flange




	N	NA	NB	NC	Weight [lbs / kg]
N56C	6.496	5.875	4.500	0.394	520 / 236
N140TC	6.496	5.875	4.500	0.394	525 / 238
N180TC	8.996	7.250	8.500	0.551	536 / 242
N210TC	8.996	7.250	8.500	0.551	538 / 244
N250TC	13.780	7.250	8.500	0.551	547 / 248
N280TC	13.780	9.000	10.500	0.551	547 / 248
N320TC	17.717	11.000	12.500	0.669	600 / 272

Hollow input shaft

	MA	MB	MC
N56C	0.188	0.625	0.710
N140TC	0.188	0.875	0.964
N180TC	0.250	1.125	1.241
N210TC	0.312	1.375	1.518
N250TC	0.375	1.625	1.796
N280TC	0.500	1.875	2.102
N320TC	0.500	2.125	2.350

	C						
	N56C	N140TC	N180TC	N210TC	N250TC	N280TC	N320TC
C 90 2	—	—	25.93 658.5	27.38 695.5	30.37 771.5	30.57 776.5	33.43 849
C 90 3	—	—	25.93 658.5	27.38 695.5	30.37 771.5	30.57 776.5	33.43 849
C 90 4	28.66 728	28.66 728	29.19 741.5	30.65 778.5	33.45 849.5	33.64 854.5	—

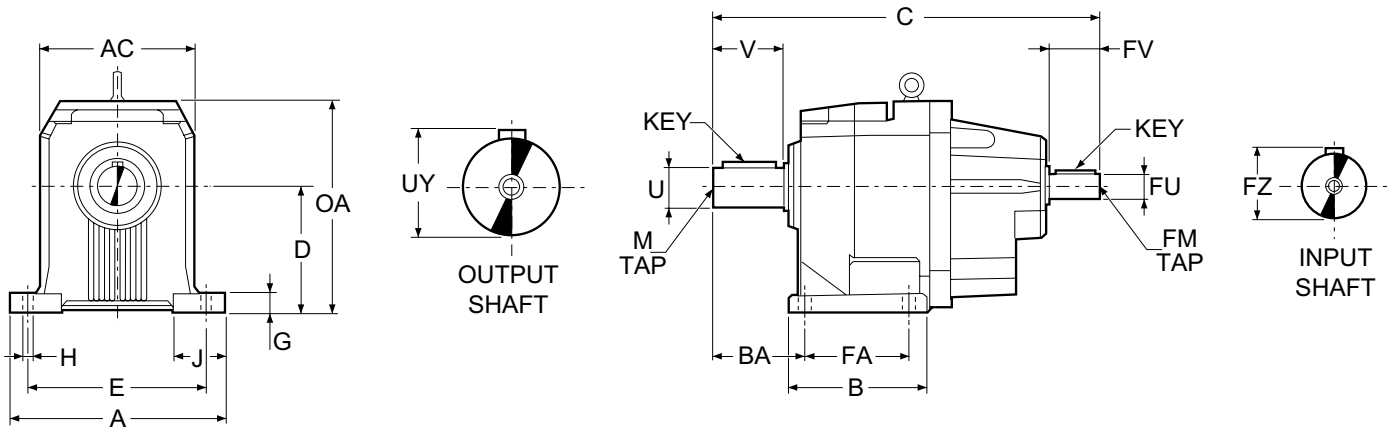

Gearcase


	A	AC	B	BA	C	D	E	FA	G	H	J	OA
C 90 2, C90 3	20.472	14.764	13.346	8.268	36.63	11.811	17.323	9.843	1.575	1.299	5.512	19.488
	520	375	339	210	930.5	300	440	250	40	33	140	495
C 90 4	20.472	14.764	13.346	8.268	31.38	11.811	17.323	9.843	1.575	1.299	5.512	19.488
	520	375	339	210	797	300	440	250	40	33	140	495

Output shaft

	U	UY	V	Key	M
C 90 2, C 90 3, C 90 4	3.543	3.740	6.693	25x14x140	M20x42 [mm]
	90	95	170		

Input shaft (Optional metric series / Inch series)

	FU	FZ	FV	Key	FM	Weight [lbs / kg]
C 90 2, C 90 3	2.362	2.520	5.512	18x11x120	M16x36 [mm]	601 / 273
	60	64	140			
C 90 4	1.000	1.110	1.970	1/4 x 1/4 x 1 3/4	M8x19 [mm]	528 / 240

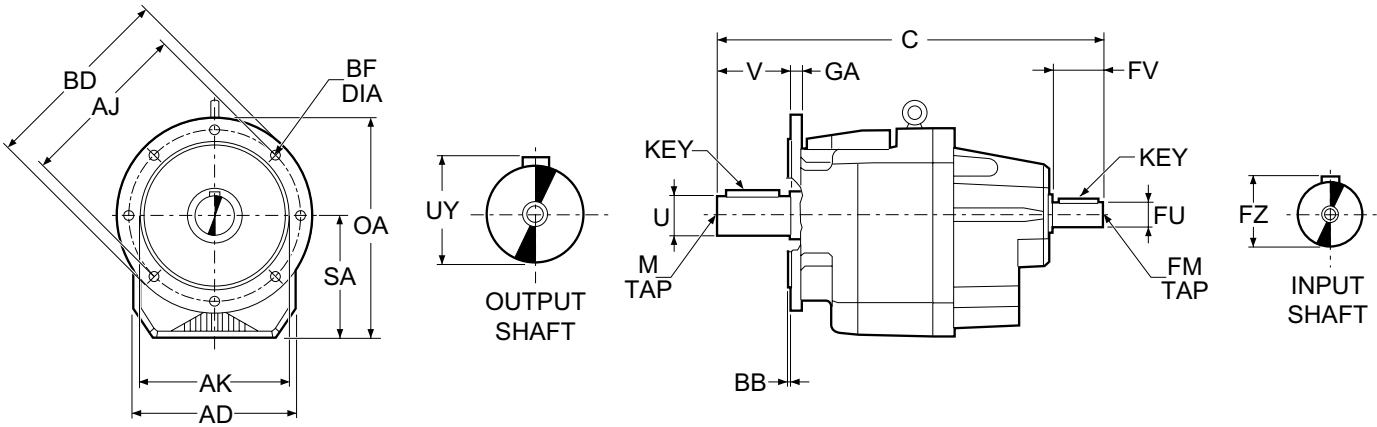

Gearcase

	AD	C	SA	OA
C 90 2, C 90 3	14.764	36.63	11.614	20.472
	375	930.5	295	520
C 90 4	14.764	31.38	11.614	20.472
	375	797	295	520

Flange



AJ	AK	BB	BD	BF	GA
15.748	13.780	0.197	17.717	0.709	0.866
400	350	5	450	18	22
15.748	13.780	0.197	17.717	0.709	0.866
400	350	5	450	18	22

Output shaft

	U	UY	V	Key	M
C 90 2, C 90 3, C 90 4	3.543	3.740	6.693	25x14x140	M20x42 [mm]
	90	95	170		

Input shaft (Optional metric series / Inch series)

	FU	FZ	FV	Key	FM	Weight [lbs / kg]
C 90 2, C 90 3	2.362	2.520	5.512	18x11x120	M16x36 [mm]	601 / 273
	60	64	140			
C 90 4	1.000	1.110	1.970	1/4 x 1/4 x 1 3/4	M8x19 [mm]	528 / 240

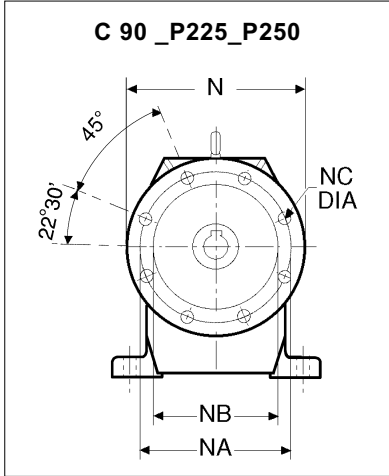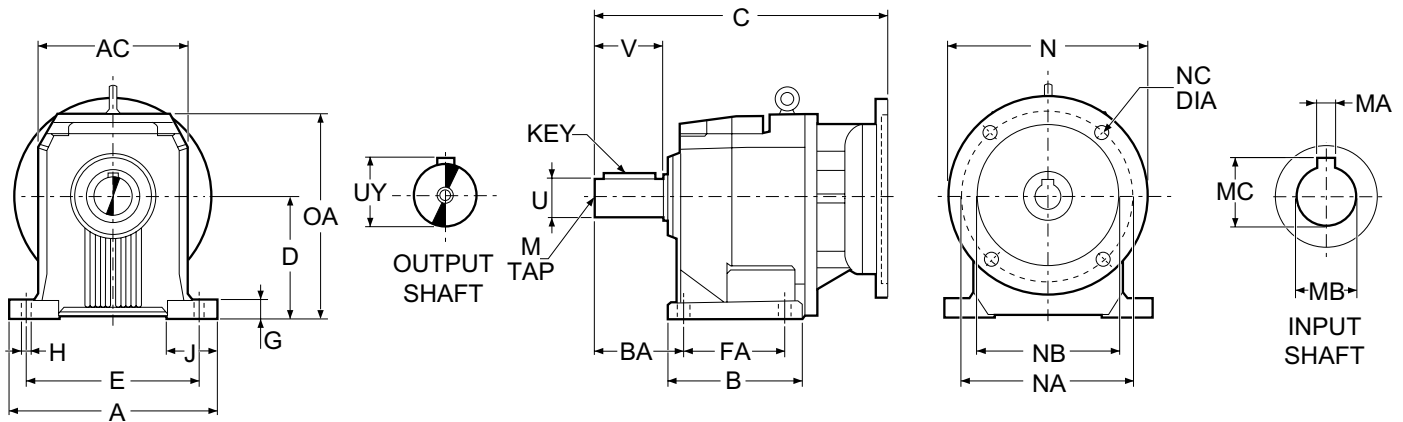

	C							
	P71	P80 P90	P100 P112	P132	P160 P180	P200	P225	P250
C 90 2, C 90 3	—	25.37 644.5	25.77 654.5	27.21 691	29.39 746.5	30.37 771.5	32.17 817	33.35 847
C 90 4	27.85 707.5	28.62 727	29.02 737	30.45 773.5	32.44 824	—	—	—

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 90 2, C 90 3, C 90 4	20.472 520	14.764 375	13.346 339	8.268 210	11.811 300	17.323 440	9.843 250	1.575 40	1.299 33	5.512 140	19.488 495

Output shaft

	U	UY	V	Key	M	
C 90 2, C 90 3, C 90 4	3.543 90	⁺⁰ _{-0.0009} ⁺⁰ _{-0.022}	3.740 95	6.693 170	25x14x140	M20x42 [mm]

IEC Flange


	N	NA	NB	NC	Weight [lbs / kg]
P71	160	130	110	M8x16	519 / 236
P80, P90	200	165	130	M10x12	524 / 238
P100, P112	250	215	180	M12x16	532 / 242
P132	300	265	230	14	537 / 244
P160, P180	350	300	250	18	552 / 251
P200	400	350	300	M16x25	598 / 272
P225	450	400	350	18	601 / 273
P250	550	500	450	18	649 / 295




Hollow input shaft

	MA	MB	MC
P71	5	14	16.3
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3
P225	18	60	64.4
P250	18	65	69.4

Dimensions are $\frac{\text{inch}}{\text{mm}}$

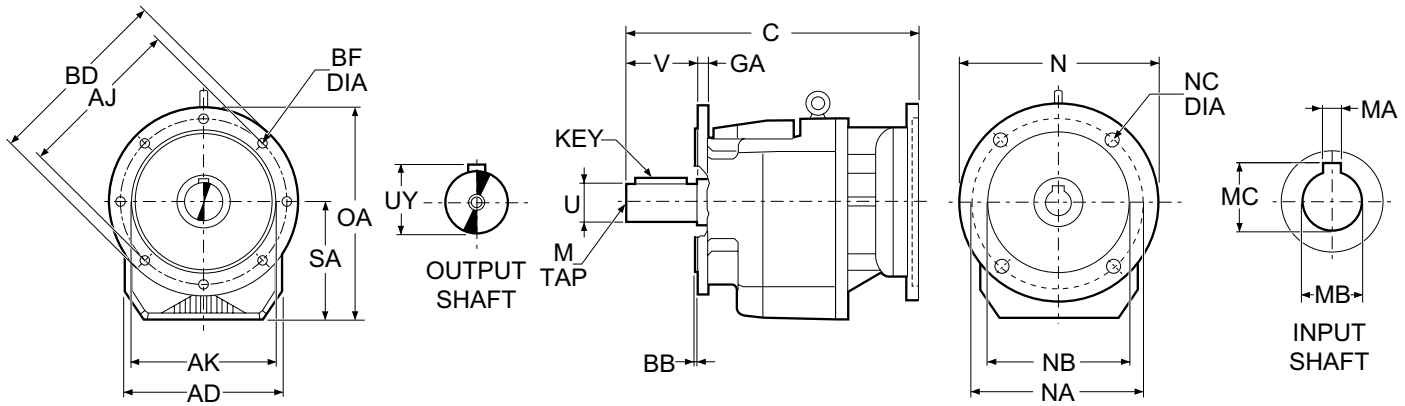

	C							
	P71	P80 P90	P100 P112	P132	P160 P180	P200	P225	P250
C 90 2, C 90 3	—	25.37 644.5	25.77 654.5	27.21 691	29.39 746.5	30.37 771.5	32.17 817	33.35 847
C 90 4	27.85 707.5	28.62 727	29.02 737	30.45 773.5	32.44 824	—	—	—

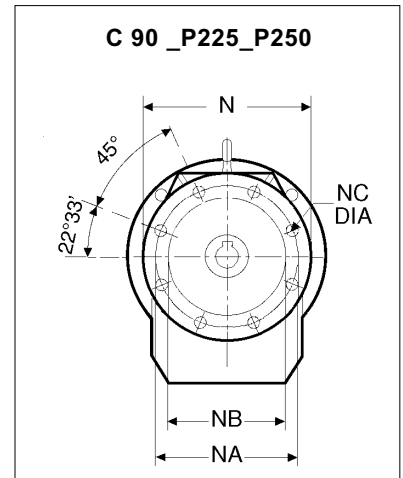

Gearcase

	AD	SA	OA
C 90 2, C 90 3, C 90 4	14.764 375	11.614 295	20.472 520

Flange

AJ	AK	BB	BD	BF	GA
15.748	13.780 -0.0024 -0.0047	0.197	17.717	0.709	0.866
400	350 -0.062 -0.119	5	450	18	22

Output shaft

	U	UY	V	Key	M
C 90 2, C 90 3, C 90 4	F 3.543 90 +0 -0.0009 +0 -0.022	3.740 95	6.693 170	25x14x140	M20x42 [mm]




IEC Flange

	N	NA	NB	NC	Weight [lbs / kg]
P71	160	130	110	M8x16	519 / 236
P80, P90	200	165	130	M10x12	524 / 238
P100, P112	250	215	180	M12x16	532 / 242
P132	300	265	230	14	537 / 244
P160, P180	350	300	250	18	552 / 251
P200	400	350	300	M16x25	598 / 272
P225	450	400	350	18	601 / 273
P250	550	500	450	18	649 / 295

Hollow input shaft

	MA	MB	MC
P71	5	14	16.3
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3
P225	18	60	64.4
P250	18	65	69.4

Dimensions are $\frac{\text{inch}}{\text{mm}}$

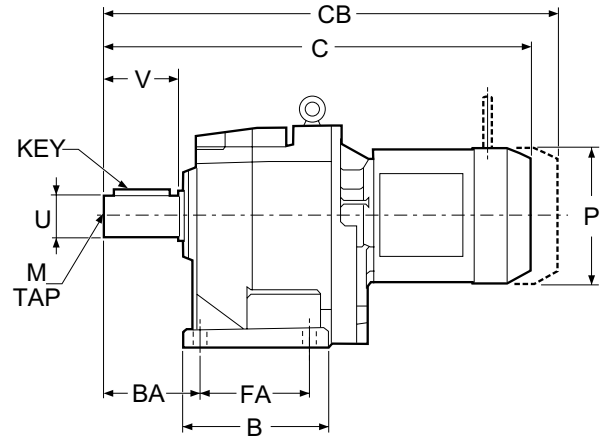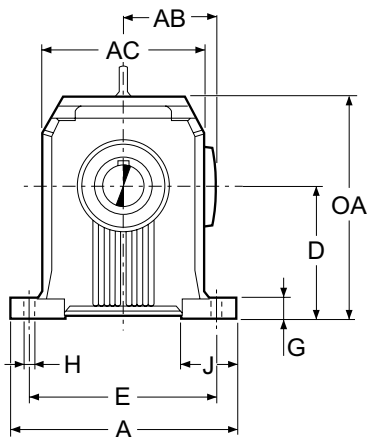

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 100 2, C 100 3, C 100 4	22.047 560	17.323 440	15.315 389	10.039 255	13.583 345	19.291 490	11.417 290	1.772 45	1.299 33	6.299 160	22.441 570

Output shaft




	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4	3.937 ⁺⁰ 100 ^{-0.0009}	4.173 106	8.268 210	28x16x180	M24x50 [mm]

Motor



	AB	C	CB	P	Weight [lbs / kg]
C 100 2_S4 M4S	7.598	41.30	45.59	10.157	860 / 391
C 100 3_S4 M4S	193	1049	1158	258	
C 100 2_S4 M4L	7.598	42.80	47.09	10.157	902 / 410
C 100 3_S4 M4L	193	1087	1196	258	
C 100 2_S4 M4LC	7.598	44.17	48.07	10.157	920 / 418
C 100 3_S4 M4LC	193	1122	1221	258	
C 100 2_S5 M5S	9.646	46.20	51.71	12.205	990 / 450
C 100 3_S5 M5S	245	1174	1314	310	
C 100 2_S5 M5L	9.646	47.93	53.45	12.205	1025 / 466
C 100 3_S5 M5L	245	1218	1358	310	
C 100 4_S2 M2S	4.685 119	38.84 986.5	41.59 1057	6.142 156	785 / 357
C 100 4_S3 M3S	5.591 142	40.53 1030	44.31 1126	7.677 195	805 / 366
C 100 4_S3 M3L	5.591 142	41.79 1062	45.37 1153	7.677 195	821 / 373
C 100 4_S4 M4S	7.598 193	44.55 1132	48.84 1241	10.157 258	878 / 399
C 100 4_S4 M4L	7.598 193	46.04 1170	50.34 1279	10.157 258	920 / 418
C 100 4_S4 M4LC	9.646 245	47.42 1205	51.32 1304	10.157 258	937 / 426

Dimensions are $\frac{\text{inch}}{\text{mm}}$

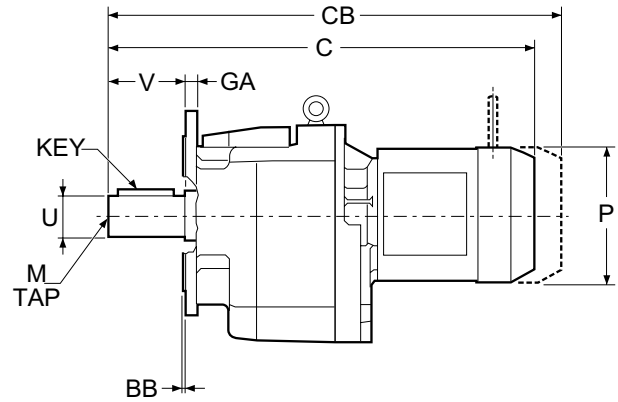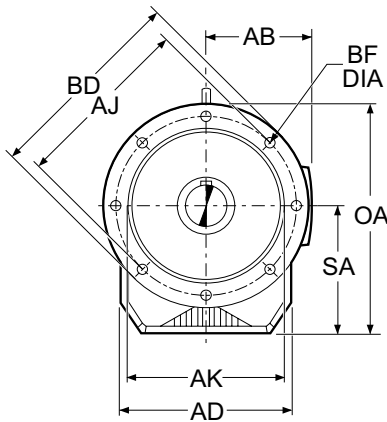

Gearcase

	AD	SA	OA
C 100 2, C 100 3, C 100 4	17.323	13.386	24.213
	440	340	615

Flange

AJ	AK	BB	BD	BF	GA
19.685	17.717	0.197	21.654	0.709	0.984
500	450	5	550	18	25

Output shaft


	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4	3.937	4.173	8.268	28x16x180	M24x50 [mm]
	100	106	210		

Motor



	AB	C	CB	P	Weight [lbs / kg]
C 100 2_S4 M4S	7.598	41.30	45.59	10.157	860 / 391
C 100 3_S4 M4S	193	1049	1158	258	
C 100 2_S4 M4L	7.598	42.80	47.09	10.157	902 / 410
C 100 3_S4 M4L	193	1087	1196	258	
C 100 2_S4 M4LC	7.598	44.17	48.07	10.157	920 / 418
C 100 3_S4 M4LC	193	1122	1221	258	
C 100 2_S5 M5S	9.646	46.20	51.71	12.205	990 / 450
C 100 3_S5 M5S	245	1174	1314	310	
C 100 2_S5 M5L	9.646	47.93	53.45	12.205	1025 / 466
C 100 3_S5 M5L	245	1218	1358	310	
C 100 4_S2 M2S	4.685	38.84	41.59	6.142	785 / 357
	119	986.5	1057	156	
C 100 4_S3 M3S	5.591	40.53	44.31	7.677	805 / 366
	142	1030	1126	195	
C 100 4_S3 M3L	5.591	41.79	45.37	7.677	821 / 373
	142	1062	1153	195	
C 100 4_S4 M4S	7.598	44.55	48.84	10.157	878 / 399
	193	1132	1241	258	
C 100 4_S4 M4L	7.598	46.04	50.34	10.157	920 / 418
	193	1170	1279	258	
C 100 4_S4 M4LC	9.646	47.42	51.32	10.157	937 / 426
	245	1205	1304	258	

Dimensions are $\frac{\text{inch}}{\text{mm}}$

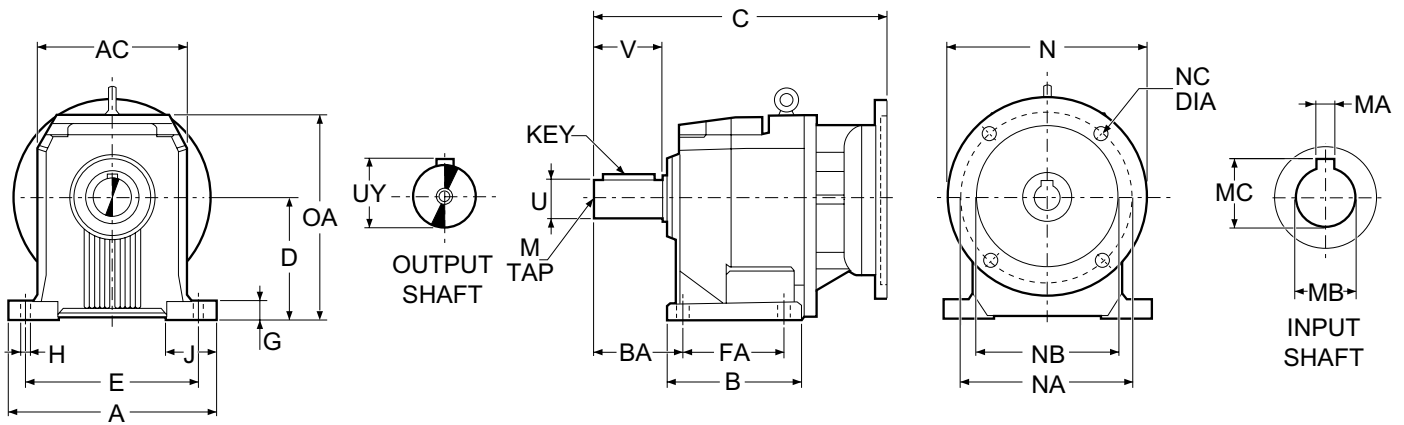

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 100 2, C 100 3, C 100 4	22.047 560	17.323 440	15.315 389	10.039 255	13.583 345	19.291 490	11.417 290	1.772 45	1.299 33	6.299 160	22.441 570

Output shaft

	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4 P	3.937 100 <small>+0 -0.0009 +0 -0.022</small>	4.173 106	8.268 210	28x16x180	M24x50 [mm]

NEMA Flange




	N	NA	NB	NC	Weight [lbs / kg]
N180TC	8.996	7.250	8.500	0.551	827 / 375
N210TC	8.996	7.250	8.500	0.551	831 / 377
N250TC	13.780	7.250	8.500	0.551	840 / 381
N280TC	13.780	9.000	10.500	0.551	840 / 381
N320TC	17.717	11.000	12.500	0.669	889 / 403

Hollow input shaft

	MA	MB	MC
N180TC	0.250	1.125	1.241
N210TC	0.312	1.375	1.518
N250TC	0.375	1.625	1.796
N280TC	0.500	1.875	2.102
N320TC	0.500	2.125	2.350

	C				
	N180TC	N210TC	N250TC	N280TC	N320TC
C 100 2	—	31.12 790.5	34.11 866.5	34.31 871.5	37.17 944
C 100 3	—	31.12 790.5	34.11 866.5	34.31 871.5	37.17 944
C 100 4	32.91 836	34.37 873	37.17 944	37.36 949	—

Dimensions are $\frac{\text{inch}}{\text{mm}}$

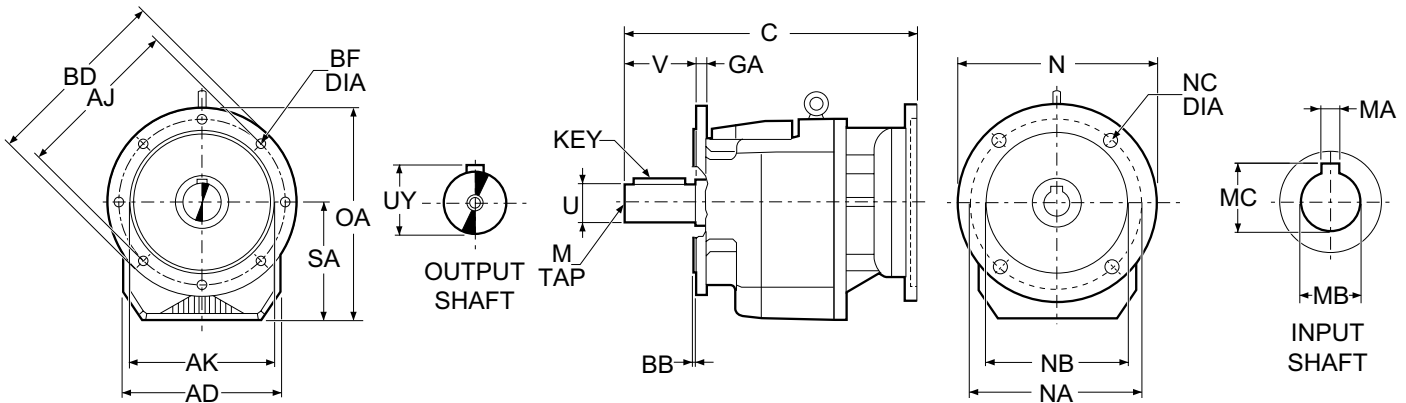

Gearcase

	AD	SA	OA
C 100 2, C 100 3, C 100 4	17.323	13.386	24.213
	440	340	615

Flange

AJ	AK	BB	BD	BF	GA
19.685	17.717	0.197	21.654	0.709	0.984
500	450	5	550	18	25

Output shaft

	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4	3.937	4.173	8.268	28x16x180	M24x50 [mm]
F	⁺⁰ -0.0009 100	⁺⁰ -0.022	210		

NEMA Flange




	N	NA	NB	NC	Weight [lbs / kg]
N180TC	8.996	7.250	8.500	0.551	827 / 375
N210TC	8.996	7.250	8.500	0.551	831 / 377
N250TC	13.780	7.250	8.500	0.551	840 / 381
N280TC	13.780	9.000	10.500	0.551	840 / 381
N320TC	17.717	11.000	12.500	0.669	889 / 403

Hollow input shaft

	MA	MB	MC
N180TC	0.250	1.125	1.241
N210TC	0.312	1.375	1.518
N250TC	0.375	1.625	1.796
N280TC	0.500	1.875	2.102
N320TC	0.500	2.125	2.350

	C				
	N180TC	N210TC	N250TC	N280TC	N320TC
C 100 2	—	31.12 790.5	34.11 866.5	34.31 871.5	37.17 944
C 100 3	—	31.12 790.5	34.11 866.5	34.31 871.5	37.17 944
C 100 4	32.91 836	34.37 873	37.17 944	37.36 949	—

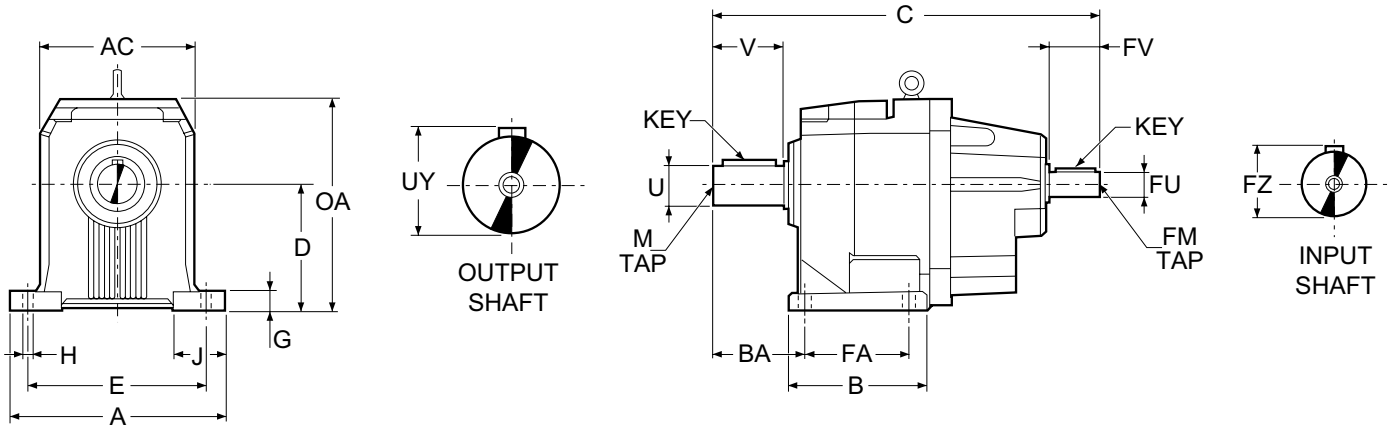

Gearcase


	A	AC	B	BA	C	D	E	FA	G	H	J	OA
C 100 2, C 100 3	22.047	17.323	15.315	10.039	40.37	13.583	19.291	11.417	1.772	1.299	6.299	22.441
	560	440	389	255	1025.5	345	490	290	45	33	160	570
C 100 4	22.047	17.323	15.315	10.039	35.12	13.583	19.291	11.417	1.772	1.299	6.299	22.441
	560	440	389	255	892	345	490	290	45	33	160	570

Output shaft

	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4 P	3.937	4.173	8.268	28x16x180	M24x50 [mm]
	100	106	210		

Input shaft (Optional metric series / Inch series)

	FU	FZ	FV	Key	FM	Weight [lbs / kg]
C 100 2, C 100 3 HS	2.362	2.520	5.512	18x11x120	M16x36 [mm]	900 / 409
	60	64	140			
C 100 4 NHS	1.000	1.110	1.970	1/4 x 1/4 x 1 3/4	M8x19 [mm]	818 / 372

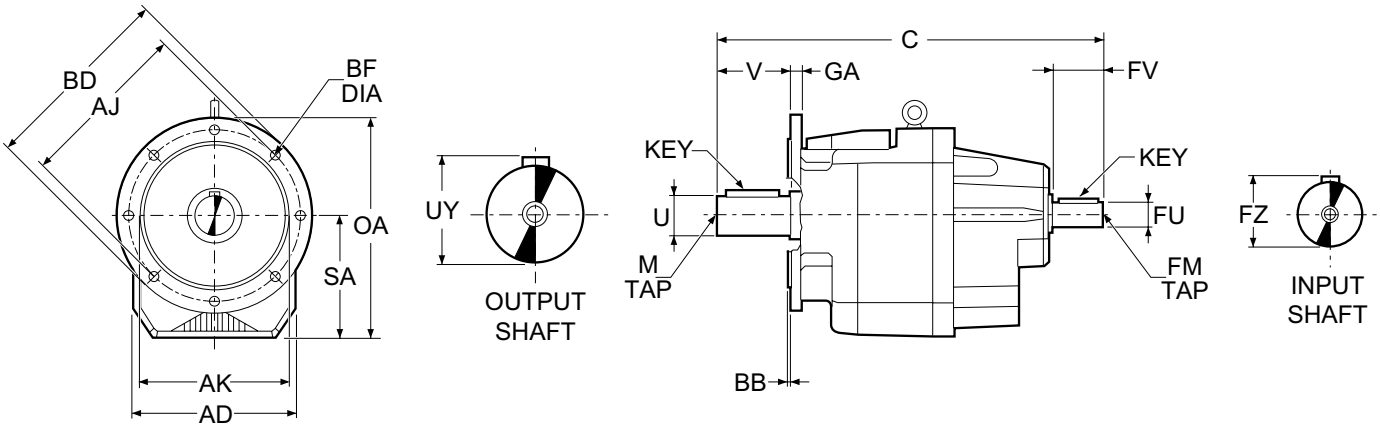

Gearcase

	AD	C	SA	OA
C 100 2, C 100 3	17.323	40.37	13.386	24.213
	440	1025.5	340	615
C 100 4	17.323	35.12	13.386	24.213
	440	892	340	615

Flange

AJ	AK	BB	BD	BF	GA
19.685	17.717 -0.0027 -0.0052	0.197	21.654	0.709	0.984
500	450 -0.068 -0.131	5	550	18	25
19.685	17.717 -0.0027 -0.0052	0.197	21.654	0.709	0.984
500	450 -0.068 -0.131	5	550	18	25


Output shaft

	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4	3.937 +0 -0.0009	4.173	8.268	28x16x180	M24x50 [mm]
	100 +0 -0.022	106	210		


Input shaft (Optional metric series / Inch series)

	FU	FZ	FV	Key	FM	Weight [lbs / kg]
C 100 2, C 100 3	2.362 +0 -0.0007	2.520	5.512	18x11x120	M16x36 [mm]	900 / 409
	60 +0 -0.019	64	140			
C 100 4	1.000 +0 -0.0005	1.110	1.970	1/4 x 1/4 x 1 3/4	M8x19 [mm]	818 / 372



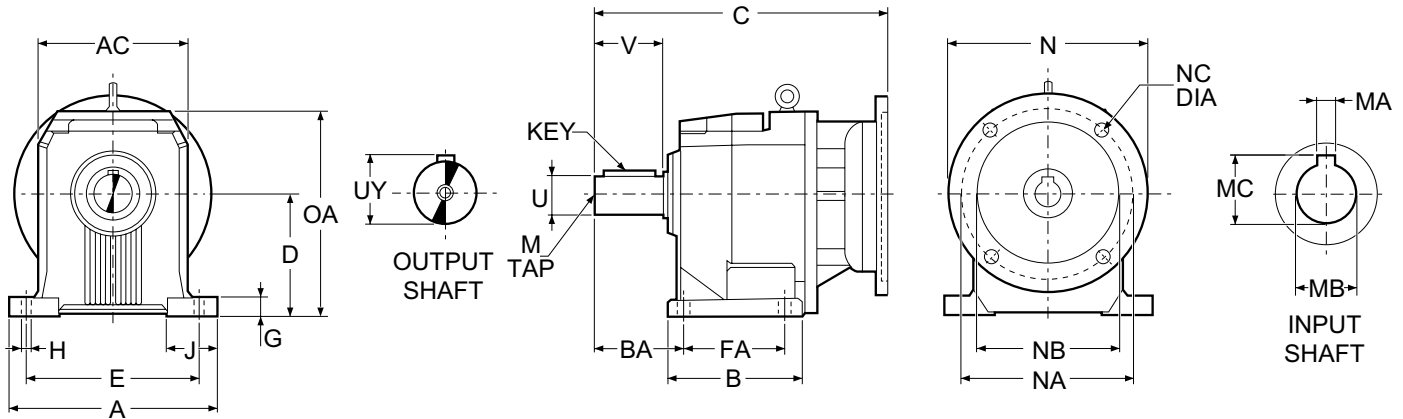

	C						
	P80 P90	P100 P112	P132	P160 P180	P200	P225	P250 P280
C 100 2, C 100 3	—	29.51 749.5	30.95 786	33.13 841.5	34.11 866.5	35.91 912	37.09 942
C 100 4	32.38 822.5	32.78 832.5	34.21 869	36.20 919.5	—	—	—

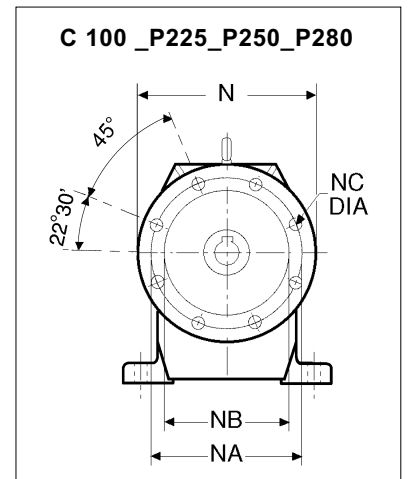

Gearcase

	A	AC	B	BA	D	E	FA	G	H	J	OA
C 100 2, C 100 3, C 100 4	22.047 560	17.323 440	15.315 389	10.039 255	13.583 345	19.291 490	11.417 290	1.772 45	1.299 33	6.299 160	22.441 570

Output shaft

	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4 P	3.937 100 <small>+0 -0.0009 +0 -0.022</small>	4.173 106	8.268 210	28x16x180	M24x50 [mm]



IEC Flange

	N	NA	NB	NC	Weight [lbs / kg]
P80, P90	200	165	130	M10x12	816 / 371
P100, P112	250	215	180	M12x16	825 / 375
P132	300	265	230	14	829 / 377
P160, P180	350	300	250	18	840 / 382
P200	400	350	300	M16x25	887 / 403
P225	450	400	350	18	887 / 403
P250, P280	550	500	450	18	937 / 426

Hollow input shaft

	MA	MB	MC
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3
P225	18	60	64.4
P250	18	65	69.4
P280	20	75	79.9

Dimensions are $\frac{\text{inch}}{\text{mm}}$

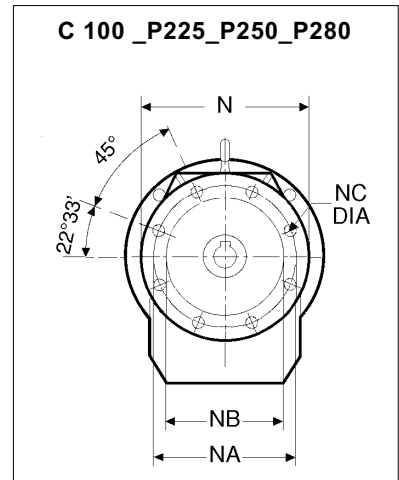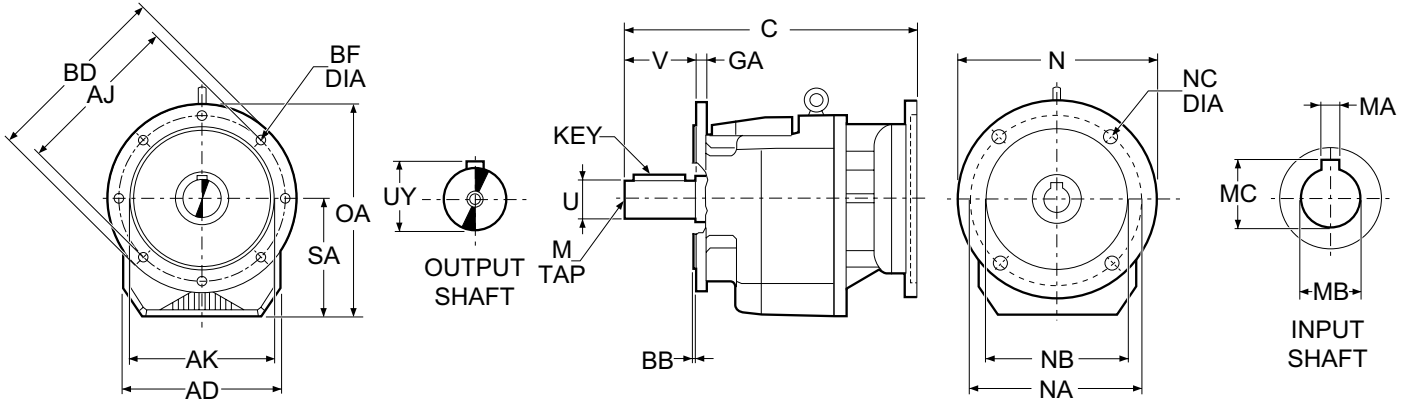

	C						
	P80 P90	P100 P112	P132	P160 P180	P200	P225	P250 P280
C 100 2, C 100 3	—	29.51 749.5	30.95 786	33.13 841.5	34.11 866.5	35.91 912	37.09 942
C 100 4	32.38 822.5	32.78 832.5	34.21 869	36.20 919.5	—	—	—

Gearcase

	AD	SA	OA
C 100 2, C 100 3, C 100 4	17.323 440	13.386 340	24.213 615

Flange

AJ	AK	BB	BD	BF	GA
19.685	17.717 <small>-0.0027 -0.0052</small>	0.197	21.654	0.709	0.984
500	450 <small>-0.068 -0.131</small>	5	550	18	25

Output shaft

	U	UY	V	Key	M
C 100 2, C 100 3, C 100 4 F	3.937 <small>+0 -0.0009</small> 100 <small>+0 -0.022</small>	4.173 106	8.268 210	28x16x180	M24x50 [mm]

IEC Flange




	N	NA	NB	NC	Weight [lbs / kg]
P80, P90	200	165	130	M10x12	816 / 371
P100, P112	250	215	180	M12x16	825 / 375
P132	300	265	230	14	829 / 377
P160, P180	350	300	250	18	840 / 382
P200	400	350	300	M16x25	887 / 403
P225	450	400	350	18	887 / 403
P250, P280	550	500	450	18	937 / 426

Hollow input shaft

	MA	MB	MC
P80	6	19	21.8
P90	8	24	27.3
P100, P112	8	28	31.3
P132	10	38	41.3
P160	12	42	45.3
P180	14	48	51.8
P200	16	55	59.3
P225	18	60	64.4
P250	18	65	69.4
P280	20	75	79.9

Dimensions are $\frac{\text{inch}}{\text{mm}}$

Flange options for C 11_NU...C 61_NU

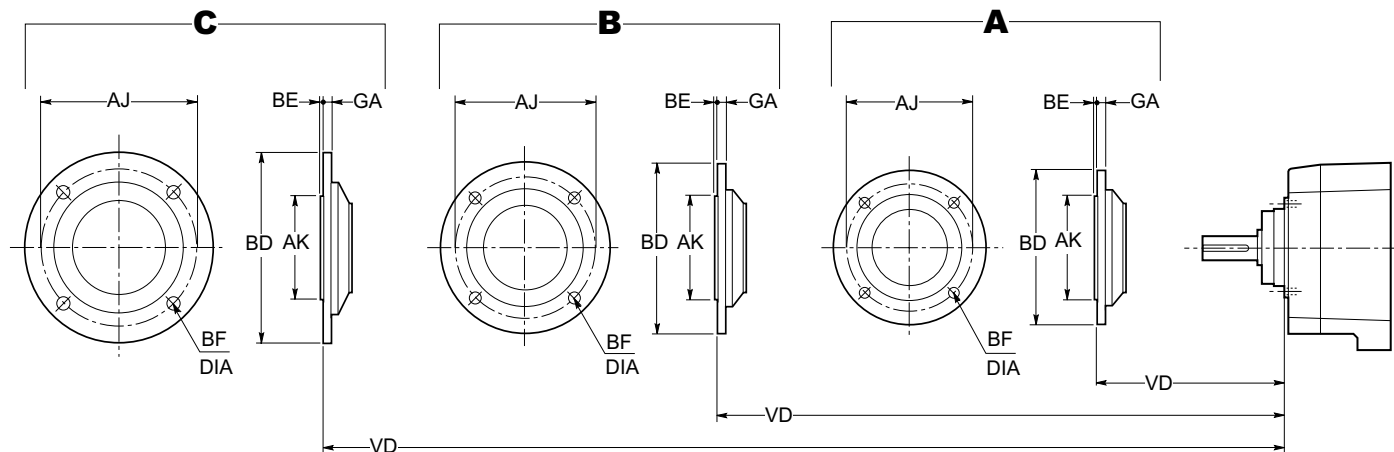


Flange

		AJ	AK	BD	BE	BF	GA	VD
FA	C 11	3.937 100	3.150 80 <small>-0.0017 -0.0033 -0.043 -0.083</small>	4.724 120	0.118 3	0.276 7	0.315 8	0.866 22
	C 21	4.528 115	3.740 95 <small>-0.0017 -0.0033 -0.043 -0.083</small>	5.512 140	0.118 3	0.354 9	0.394 10	1.220 31
	C 31	5.118 130	4.331 110 <small>-0.0017 -0.0033 -0.043 -0.083</small>	6.299 160	0.118 3	0.354 9	0.394 10	1.417 36
	C 35	6.496 165	5.118 130 <small>-0.0017 -0.0033 -0.043 -0.083</small>	7.874 200	0.138 3.5	0.433 11	0.433 11	0.709 18
	C 41	6.496 165	5.118 130 <small>-0.0017 -0.0033 -0.043 -0.083</small>	7.874 200	0.138 3.5	0.433 11	0.433 11	1.575 40
	C 51	8.465 215	7.087 180 <small>-0.0017 -0.0033 -0.043 -0.083</small>	9.843 250	0.157 4	0.551 14	0.512 13	0.768 19.5
	C 61	10.433 265	9.055 230 <small>-0.0017 -0.0033 -0.043 -0.083</small>	11.811 300	0.157 4	0.551 14	0.630 16	0.984 25
FB	C 11	4.528 115	3.740 95 <small>-0.0017 -0.0033 -0.043 -0.083</small>	5.512 140	0.118 3	0.354 9	0.394 10	0.866 22
	C 21	5.118 130	4.331 110 <small>-0.0017 -0.0033 -0.043 -0.083</small>	6.299 160	0.118 3	0.354 9	0.394 10	1.220 31
	C 31	6.496 165	5.118 130 <small>-0.0017 -0.0033 -0.043 -0.083</small>	7.874 200	0.138 3.5	0.433 11	0.433 11	1.417 36
	C 35	8.465 215	7.087 180 <small>-0.0017 -0.0033 -0.043 -0.083</small>	9.843 250	0.157 4	0.551 14	0.551 14	0.709 18
	C 41	8.465 215	7.087 180 <small>-0.0017 -0.0033 -0.043 -0.083</small>	9.843 250	0.157 4	0.551 14	0.512 13	1.575 40
	C 51	10.433 265	9.055 230 <small>-0.0017 -0.0033 -0.043 -0.083</small>	11.811 300	0.157 4	0.551 14	0.630 16	0.768 19.5
	C 61	11.811 300	9.843 250 <small>-0.0017 -0.0033 -0.043 -0.083</small>	13.780 350	0.197 5	0.709 18	0.709 18	0.984 25
FC	C 11	5.118 130	4.331 110 <small>-0.0017 -0.0033 -0.043 -0.083</small>	6.299 160	0.118 3	0.354 9	0.394 10	0.866 22
	C 21	6.496 165	5.118 130 <small>-0.0017 -0.0033 -0.043 -0.083</small>	7.874 200	0.138 3.5	0.433 11	0.433 11	1.220 31
	C 31	8.465 215	7.087 180 <small>-0.0017 -0.0033 -0.043 -0.083</small>	9.843 250	0.157 4	0.551 14	0.512 13	1.417 36

Dimensions are $\frac{\text{inch}}{\text{mm}}$

3.0 **BONFIGLIOLI ELECTRIC MOTORS**

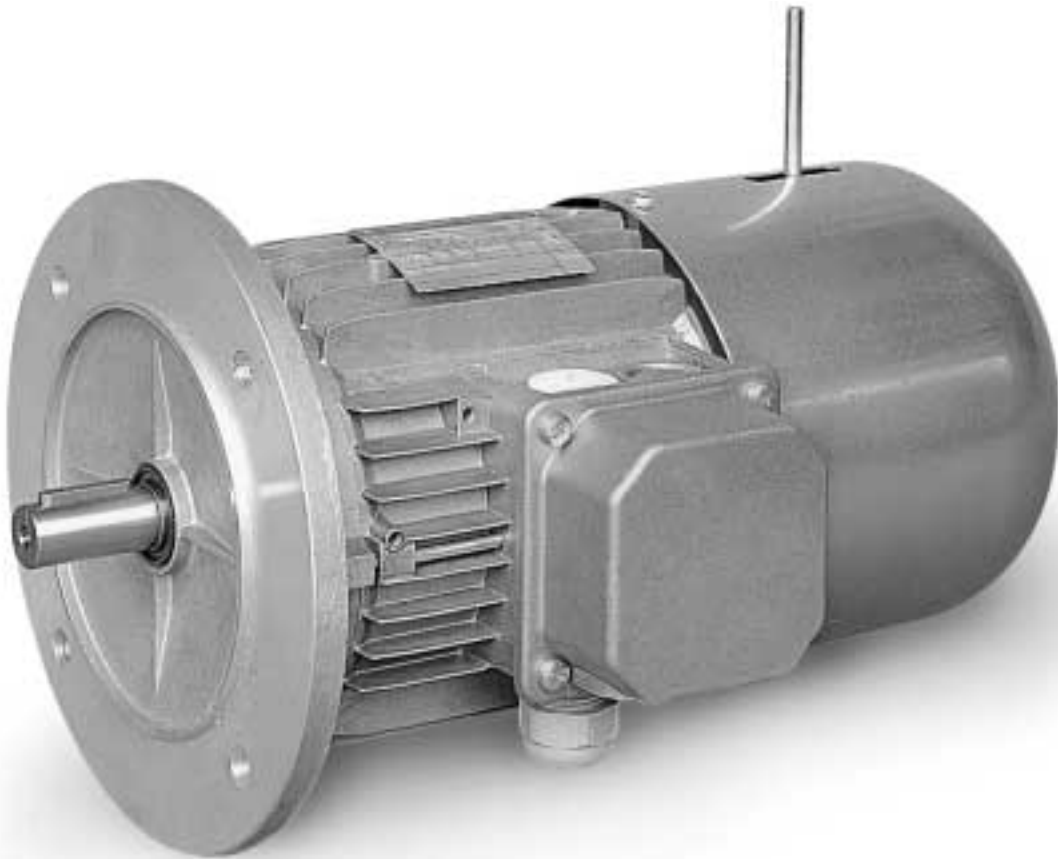

3.1 GENERAL INFORMATION

BONFIGLIOLI RIDUTTORI three-phase AC induction motors and brake motors are designed for continuous operation, IEC dimensional standard and comply electrically with all relevant standards including NEMA MG1.

They are supplied either integral (M type) to a BONFIGLIOLI gear unit or flanged design (BN type).

The motors also comply with national standards adapted to IEC 60034-1 as charted along side.

(C1)

Canada	CSA C22.2 N° 100
Great Britain	BS5000 / BS 4999
Germany	DIN VDE 0530
Australia	AS 1359
Belgium	NBNC 51 - 101
Norway	NEK – IEC 34
France	NF C 51
Austria	OEVE M 10
Switzerland	SEV 3009
Netherlands	NEN 3173
Sweden	SS 426 01 01

Abbreviations and units

Symb.	U.m.	Description
cos φ	–	Power factor
η	–	Efficiency
f_m	–	Intermittence adjustment factor
f_t	–	Ambient temperature factor
I	–	Cyclic duration factor
I_n	[A]	Rated current
I_s	[A]	Locked rotor current
J_c	[lb·ft ²]	Load inertia
J_m	[lb·ft ²]	Motor inertia
n	[rpm]	Speed
K_c	–	Torque factor
K_d	–	Load factor
K_i	–	Inertia factor
T_b	[lb·in]	Brake torque
T_n	[lb·in]	Motor rated torque
T_a	[lb·in]	Mean starting torque
T_k	[lb·in]	Breakdown torque
T_L	[lb·in]	Load torque
T_s	[lb·in]	Locked rotor torque
P_b	[W]	Power absorbed by brake coil
P_n	[W]	Rated power output
t₁	[ms]	Brake release time
t_{1s}	[ms]	Shorter brake release time
t₂	[ms]	Brake reaction time
t_{2c}	[ms]	Faster reaction time
t_a	[°C/ °F]	Ambient temperature
t_f	[min]	Operating time at constant load
t_r	[min]	Rest time
W	[lb·ft]	Brake work between two successive adjustments
W_{max}	[lb·ft]	Max permissible brake work
Z	[1/h]	Permissible starts per hour
Z₀	[1/h]	Permissible starts per hour (unloaded, I=50%)

Conversion table for commonly used metric – imperial units

Length

1 in	=	25.40 mm	= 0.0254 m
1 ft	=	304.8 mm	= 0.3048 m
1 yd	=	914.4 mm	= 0.9144 m

Area

1 in ²	=	645.16 mm ²	= 0.645×10 ⁻³ m ²
1 ft ²	=	92.9×10 ³ mm ²	= 92.9× 10 ³ m ²
1 yd ²	=	836×10 ³ mm ²	= 0.8361 m ²

Volume

1 in ³	=	16.4×10 ⁻³ dm ³	= 16.4×10 ⁻⁶ m ³
1 ft ³	=	28.32 dm ³	= 28.3×10 ⁻³ m ³

Force – Weight

1 lbm	=	2.2046 Kg
1 lbf	=	4.4482 N

Torque

1 lb in	=	0.1129 Nm
1 lb ft	=	1.3558 Nm

Power

1 hp	=	0.7457 kW
------	---	-----------

Moment of inertia

1 lb ft ²	=	4.214×10 ⁻²	Kg m ²
1 lb in s ²	=	1.12985×10 ⁻¹	Kg m ²
1 lb ft s ²	=	1.35582	Kg m ²


Pressure – stress

1 lb/in ²	=	6.89×10 ⁻³	N/mm ²
1 lb/ft ²	=	47.88	N/m ²

Temperature

t [°F]	=	$\frac{5}{9} \times [t - 32]$	[°C]
T [°C]	=	$\left(\frac{9}{5} \times T + 32 \right)$	[°F]

3.2 MOTOR ORDERING NUMBERS

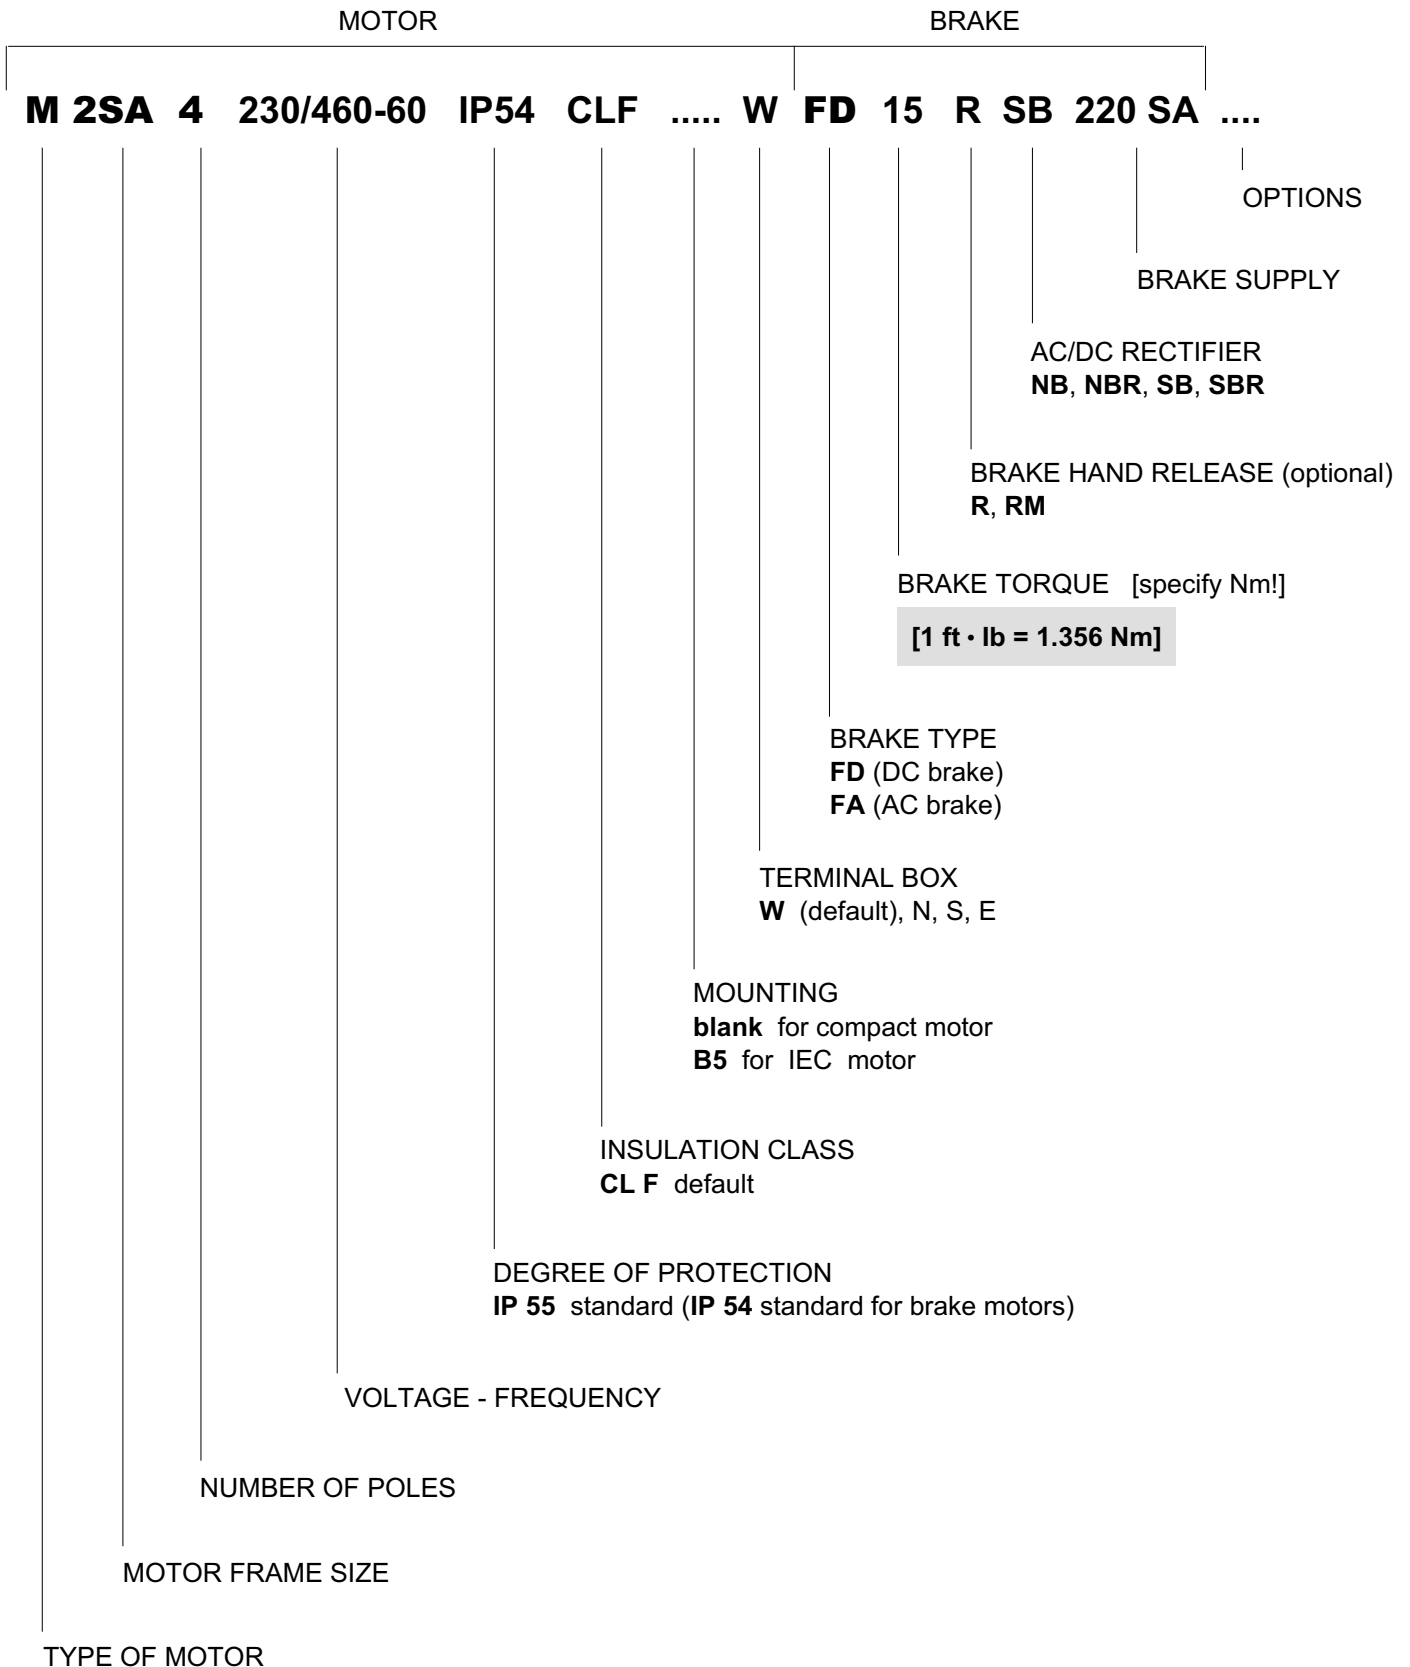

US power mains voltages and the corresponding rated voltages to be specified for the motor are indicated in the following table:

(C2)

Frequency	Mains voltage	V _{mot}
60 Hz	208 V	200 V
	240 V	230 V
	480 V	460 V
	600 V	575 V

Motors with rated voltage 230/460V 60Hz are supplied with YY/Y connection and 9-stud terminal box as standard.

For DC brake motors type BN_FD, the rectifier is connected to one-phase 230V a.c. voltage in the motor terminal box, as standard.

Brake power supply for brake motors is as follows:

(C3)

BN_FD M_FD	
Wired to terminal box 1~230V a.c.	
BN_FA M_FA	
	Specify
Separate power supply 230V Δ - 60Hz	230SA
Separate power supply 460V Y - 60Hz	460SA

Tolerances

As per the IEC standards applicable the tolerances here after apply to the following quantities.

(C4)

-0.15 (1 - η) P ≤ 75 hp	Efficiency
-(1 - cosφ)/6 min 0.02 max 0.07	Power factor
±20% *	Slip
+20%	Locked rotor current
-15% +25%	Locked rotor torque
-10%	Max. torque

* ± 30% for motors with Pn < 0.75 hp

CUS

Motors for USA and Canada

BN and M motors are available in NEMA Design C configuration (concerning electrical characteristics), certified to CSA (Canadian standard) C22.2 No. 100 and UL (Underwriters Laboratory) UL 1004. Name plate includes the cCSAus mark (voltage ≤ 600V), in this case, please specify option CUS.

3.3 MECHANICAL CHARACTERISTICS

IP..

Enclosures



Motors are provided as totally enclosed fan-cooled (TEFC) according to NEMA MG1 1-26-2 1998 and they are designed for IP 55 (IP 54 for brake motors) degree of protection in accordance with NEMA MG1- 5 / IEC 60034-5 Standards.

Higher degree of protection (IP 56, or IP 55 for brake motors) is available on request.

The following table provides an overview of the available degree of protection.

Regardless of the protection class specified on order, motors to be installed outdoors require protection against direct sunlight and in addition – when they are to be installed with the shaft downwards – a drip cover to keep out water and solid matter (option **RC**).

(C5)

		IP 54	IP 55	IP 56
		n.a.	standard	at request
BN_FD BN_FA	M_FD M_FD	standard	at request	n.a.

Cooling

The motors are self ventilated (IEC 411 / NEMA MG1-6) and are equipped with a plastic fan working in both directions.

The motors must be installed allowing sufficient space between fan cowl and the nearest wall to ensure free air intake and allow access for maintenance purposes on motor and brake, if supplied.

Independent, forced air ventilation (IEC 416 / NEMA MG1-6) can be supplied on request (option U1).

This solution enables to increase the motor duty factor when driven by an inverter and operating at reduced speed.

Direction of rotation

Rotation is possible in both directions. If terminals U1, V1, and W1 are connected to line phases L1, L2 and L3, clockwise rotation (looking from drive end) is obtained. For counterclockwise rotation, switch two phases.

Noise

Noise levels, measured using the method prescribed by ISO 1680 Standards, are within the maximum levels specified by Standards CEI EN 60034-9.

Vibrations and balancing

Rotor shafts are balanced with half key fitted and fall within the vibration class N, as per Standard CEI EN 60034-14.

If a further reduced noise level is required improved balancing can be optionally requested (class N).

Table below shows the value for the vibration velocity for standard (N) and improved (R) balancing.

(C6)

Vibration class	Angular velocity n [rpm]	Limits of the vibration velocity [mm/s]	
		BN 56...BN 132 M05...M4	BN 160MR...BN 200 M5
N	$600 \leq n \leq 3600$	1.8	2.8
R	$600 \leq n \leq 1800$	0.71	1.12
	$1800 < n \leq 3600$	1.12	1.8

Values refer to measures with freely suspended motor in unloaded conditions.

Winding connection and motor terminal box

Standard terminal board has 9 studs for YY-Y dual-voltage winding and 6 studs for star/delta winding configuration (single-speed motors).

An earth terminal located in the terminal box is provided as standard on all motors.

For DC brake motors, the AC/DC rectifier is supplied in the terminal box and it is provided with adequately connected terminals.

All connections must be carried out according to the diagrams inside the terminal box or in the [instruction manual](#).

Bearings

Life lubricated preloaded radial ball bearings are used, types are shown in the chart here under.

Calculated endurance lifetime L_{10} , as per ISO 281, in unloaded condition, exceeds 40000 hrs.

DE = drive end

NDE = non drive end

(C7)

	DE	NDE	
	M, M_FD, M_FA	M	M_FD, M_FA
M05	6004 2Z C3	6201 2Z C3	6201 2RS C3
M1	6004 2Z C3	6202 2Z C3	6202 2RS C3
M2	6007 2Z C3	6204 2Z C3	6204 2RS C3
M3	6207 2Z C3	6206 2Z C3	6206 2RS C3
M4	6309 2Z C3	6208 2Z C3	6208 2RS C3
M5	6309 2Z C3	6209 2Z C3	6209 2RS C3

(C8)

	DE	NDE	
	BN, BN_FD, BN_FA	BN	BN_FD, BN_FA
BN 56	6201 2Z C3	6201 2Z C3	-
BN 63	6201 2Z C3	6201 2Z C3	6201 2Z C3
BN 71	6202 2Z C3	6202 2Z C3	6202 2Z C3
BN 80	6204 2Z C3	6204 2Z C3	6204 2Z C3
BN 90	6205 2Z C3	6205 2Z C3	6205 2Z C3
BN 100	6206 2Z C3	6206 2Z C3	6206 2Z C3
BN 112	6306 2Z C3	6306 2Z C3	6306 2Z C3
BN 132	6308 2Z C3	6308 2Z C3	6308 2Z C3
BN 160MR	6309 2Z C3	6308 2Z C3	6308 2Z C3
BN 160M/L	6309 2Z C3	6309 2Z C3	6309 2Z C3
BN 180M	6210 2Z C3	6309 2Z C3	6309 2Z C3
BN 180L	6310 2Z C3	6310 2Z C3	6310 2Z C3
BN 200L	6312 2Z C3	6310 2Z C3	6310 2Z C3

3.4 ELECTRICAL CHARACTERISTICS

Voltage

Motors can operate on any voltage within the range of 200 – 690 Volts. Voltage to be <600 V for CSA/UL motors. Voltage values available as standard are 230/460V-60 Hz and 575V-60Hz.

Other voltage values may be available on request.

(C9)

Low Voltage	High Voltage
230V - 60Hz	460V - 60Hz
200V - 50Hz	400V - 50Hz
Single-Speed / Dual-Voltage	
Low Voltage YY	High Voltage Y

(C10)

Low Voltage	High Voltage
200V - 50Hz	346V - 50Hz
208V - 60Hz	360V - 60Hz
220V - 50Hz	380V - 50Hz
230V - 50Hz	400V - 50Hz
240V - 50Hz	415V - 50Hz
330V - 60Hz	575V - 60Hz
Single-Speed / Dual-Voltage	
Low Voltage Δ	High Voltage Y

Rated horsepower

Motor outputs shown in this catalogue are based on continuous operation at 40 °C [100 °F] ambient temperature and maximum elevation not exceeding 3300 feet (1000 m) above the sea level.

Motors can operate at higher ambient temperatures with output adjusted in accordance with the chart (C11) here below.

(C11)

Ambient temperature [°F]	100	115	120	130	140
Power output as a % of rated power	100%	95%	90%	85%	80%

Should a derating factor higher than 15% apply, contact our Technical Service.

Insulation class

CL F

Bonfiglioli motors use class **F** insulating materials (enamelled wire, insulators, impregnation resins) as compared to the standard motor.

CL H


Motors manufactured in higher insulation class **H** are available at request.

In standard motors, the stator windings temperature rise normally stays below the 80 K limit corresponding to class B over temperature.

A careful selection of insulating components makes the motors compatible with tropical climates and normal vibration.

For applications involving the presence of aggressive chemicals or high humidity, contact Bonfiglioli Engineering for assistance with product selection.

(C12)

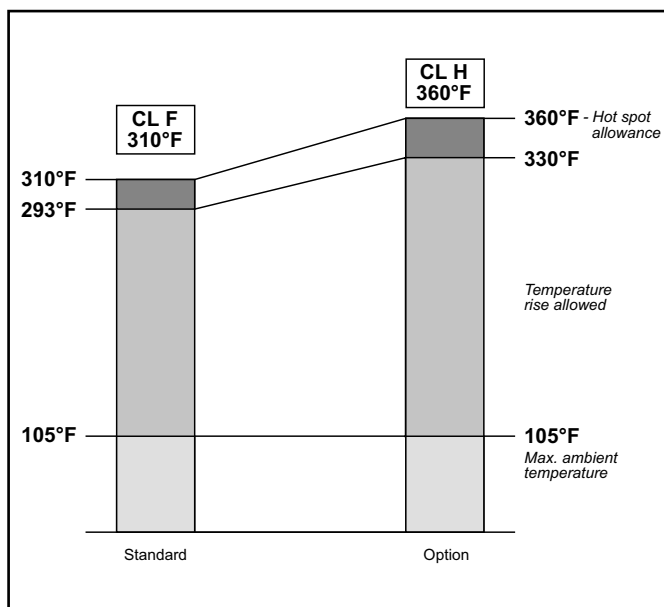

Types of duty

Unless otherwise indicated, the power rating of motors specified in the catalogue refers to continuous duty S1. For motors used under conditions other than S1, the type of duty required is defined with reference to CEI EN 60034-1 Standards.

In particular, for intermittent duties type S2 and S3, power can be adjusted with respect to continuous duty through multipliers listed in table (C13) applicable to single speed motors.

$$f_m = \frac{P(S2...S8)}{P(S1)}$$

(C13)

	Duty						Consult factory	
	S2			S3 *				S4 - S8
	Cycle duration (min)			Cyclic duration factor (I)				
	10	30	60	25%	40%	60%	Consult factory	
f_m	1.35	1.15	1.05	1.25	1.15	1.1		

* Cycle duration must, in any event, be equal to or less than 10 minutes; if this time is exceeded, please contact our Technical Service.

Cycle duration factor:

$$I = \frac{t_f}{t_f + t_r} \times 100$$

t_f = operating time at constant load

t_r = rest time

Limited duration duty S2

This type of duty is characterized by operation at constant load for a limited time, which is shorter than the time required to reach thermal equilibrium, followed by a rest period of sufficient duration to restore ambient temperature in the motor.

Periodical intermittent duty S3

This type of duty is characterized by a sequence of identical operation cycles, each including a constant load operation period and a rest period.

For this type of duty, the starting current does not significantly influence overtemperature.

Inverter-driven motors

The electric motors of series BN and M may be used in combination with PWM inverters with rated voltage at transformer input up to 500 V. Standard motors use a phase insulating system with separators, class 2 enamelled wire and class H impregnation resins (1600V peak-to-peak voltage pulse capacity and rise edge $t_s > 0.1\mu s$ at motor terminals). Table (C14) shows the typical torque/speed curves referred to S1 duty for motors with base frequency $f_b = 60$ Hz.

Because ventilation is somewhat impaired in operation at lower frequencies (approx. 30 Hz), standard motors with incorporated fan (IC411) require adequate torque derating or - alternately - the addition of a separate supply fan cooling.

Above base frequency, upon reaching the maximum output voltage of the inverter, the motor enters a steady-power field of operation, and shaft torque drops with ratio (f/f_b) .

As motor maximum torque decreases with $(f/f_b)^2$, the allowed overloading must be reduced progressively.

(C14)

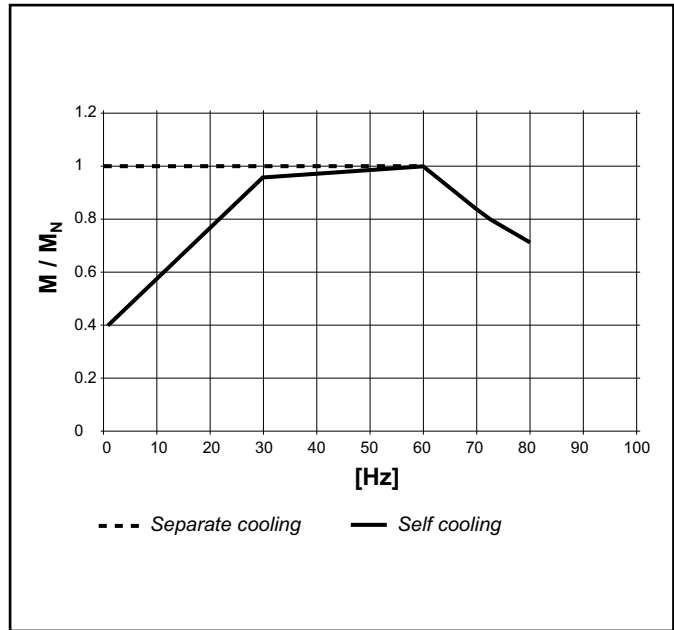




Table (C15) reports the mechanical limit speed for motor operation above rated frequency:

(C15)

		n [rpm]		
		2p	4p	6p
≤ BN 112	M05...M3	5200	4000	3000
BN 132...BN 200L	M4, M5	4500	4000	3000

Above rated speed, motors generate increased mechanical vibration and fan noise. Class R rotor balancing is highly recommended in these applications. Installing a separate supply fan cooling may also be advisable.

Independent fan cooling and brake (if fitted) must always be connected direct to mains power supply.

Permissible starts per hour

Z

The rating charts of brakemotors lend the permitted number of starts Z_0 , based on 50% intermittence and for unloaded operation.

The catalogue value represents the maximum number of starts per hour for the motor without exceeding the rated temperature for the insulation class F.

To give a practical example for an application characterized by inertia J_c , drawing power P_r and requiring mean torque at start-up T_L the actual number of starts per hour

for the motor can be calculated approximately through the following equation:

$$Z = \frac{Z_0 \times K_c \times K_d}{K_J}$$


where:

$$K_J = \frac{J_m + J_c}{J_m} = \text{inertia factor}$$

$$K_c = \frac{T_a - T_L}{T_a} = \text{torque factor}$$

K_d = load factor (see table C16)

(C16)

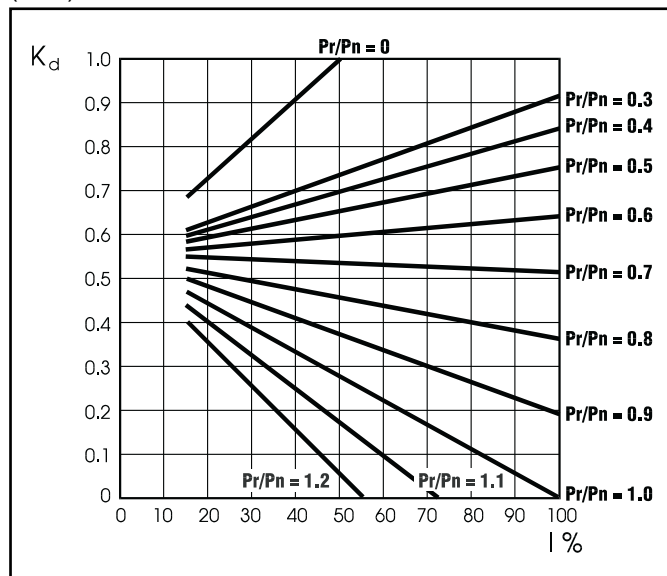

If actual starts per hour is within permitted value (Z) it may be worth checking that braking work is compatible with brake (thermal) capacity W_{max} also given in table (C21) and dependent on the number of switches (s/h).


3.5 BRAKE MOTORS

Operation

Versions with incorporated brake use spring-applied DC (FD option) or AC (FA option) brakes. All brakes are designed to provide fail-safe operation,

meaning that they are applied by spring-action in the event of a power failure.

(C17)

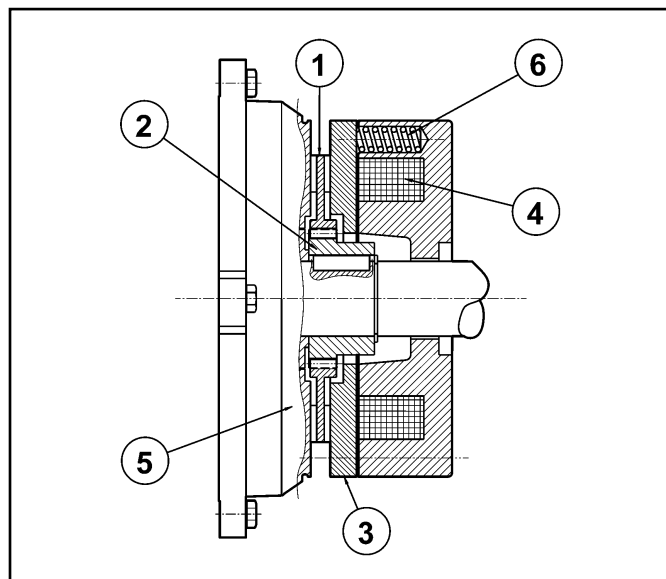

Key:

- ① brake disc
- ② disc carrier
- ③ pressure plate
- ④ brake coil
- ⑤ motor rear shield
- ⑥ brake springs

When power is disconnected, the springs push the armature plate against the brake disc. The disc becomes trapped between the armature plate and motor shield and stops the shaft from rotating.

When the coil is energized, a magnetic field attracts the armature plate, so that the brake disc – which is integral with the motor shaft – is released.


Most significant features

- High braking torques (normally $T_b \approx 2 T_n$), braking torque adjustment.
- Steel brake disc with double friction lining (low-wear, asbestos-free lining).
- Hexagonal socket head on motor shaft end (N.D.E.) for manual rotation (not compatible with options PS, RC, TC, U1, U2, EN1, EN2, EN3).
- Manual release lever.
- Corrosion-proof treatment on all brake surfaces.
- Class F insulation

3.6 DC BRAKE MOTORS TYPE BN_FD

Frame sizes: BN 63 ... BN 200L

(C18)

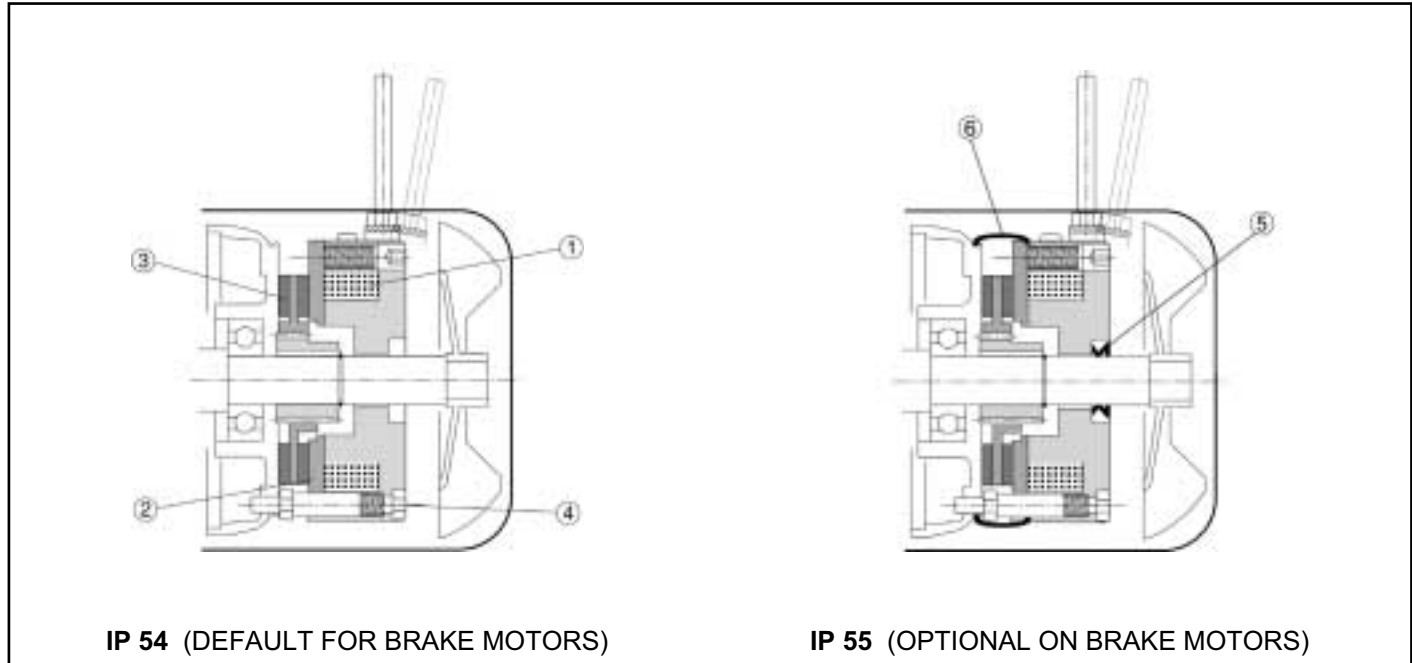

Direct current electromagnetic brake bolted onto motor shield. Preloading springs provide axial positioning of magnet body.

Brake disc slides axially on steel hub fitted onto motor shaft with anti-vibration spring.

Brake torque factory setting is indicated in the corresponding motor rating charts.

Braking torque may be modified by changing the type and/or number of springs.

At request, motors may be equipped with manual release lever with automatic return (**R**) or system for holding brake in the released position (**RM**).

See table (C32) for available release lever locations.

FD brakes ensure excellent dynamic performance with low noise. DC brake operating characteristics may be optimized to meet application requirements by choosing from the various rectifier/power supply and wiring connection options available.

Protection class

Standard protection class is IP54.

Brake motor FD is also available in protection class **IP 55**, which incorporates the following variants:

- ① V-ring at N.D.E. of motor shaft
- ② dust and water-proof rubber boot
- ③ stainless steel shim placed between motor shield and brake disc
- ④ stainless steel hub
- ⑤ stainless steel brake disc



FD brake power supply

A rectifier housed into the terminal box feeds the DC brake coil. Wiring connection across rectifier and brake coil is performed at the factory.

On single-speed motors, rectifier is pre-wired to the motor terminal board.




Rectifier standard power supply voltage V_B is as indicated in the following table (C19), regardless of mains frequency:

(C19)

2, 4, 6 P				1 speed	
		BN_FD / M_FD		brake connected to terminal board power supply	separate power supply
		$V_{mot} \pm 10\%$ 3 ~	$V_B \pm 10\%$ 1 ~		
BN 63...BN 200	M05...M5	230/460 V – 60 Hz	230 V	standard	specify V_B SA or V_B SD

The diode half-wave rectifier ($V_{dc} \approx 0,45 \times V_{ac}$) is available in versions **NB**, **SB**, **NBR** e **SBR**, as detailed in the table (C20) below:

(C20)

		Brake		
			Standard	At request
BN 63	M05	FD 02	NB	SB, SBR, NBR
BN 71	M1	FD 03		
		FD 53		
BN 80	M2	FD 04		
BN 90S	—	FD 14		
BN 90L	—	FD 05		
BN 100	M3	FD 15	SB	SBR
—		FD 55		
BN 112	—	FD 06S		
BN 132...160MR	M4	FD 56		
BN 160L - BN 180M	M5	FD 06		
BN 180L - NM 200L	—	FD 07		

Use of the **SB** rectifier is mandatory in the event of:

- high number of operations per hour
- reduced brake release response time
- brake is exposed to extreme thermal stress

Rectifiers **NBR** or **SBR** are available for applications requiring quick brake release response.

These rectifiers complement the **NB** and **SB** types as their electronic circuit incorporates a static switch that de-energizes the brake quickly in the event voltage is missing.

This arrangement ensures short brake release response time with no need for additional external wiring and contacts.

Optimum performance of rectifiers **NBR** and **SBR** is achieved with separate brake power supply.

Available voltages: $230V \pm 10\%$.

Rectifier **SB** with electronic energizing control over-energizes the electromagnet upon power-up to cut brake release response time and then switches to normal half-wave operation once the brake has been released.

FD brake technical specifications

The table (C21) shows the technical specifications of DC brakes type FD.

(C21)

Brake	Brake torque T_b [lb-in]			Release		Braking		W_{max} per each brake operation			W [lb-ftx10 ⁶]	P [W]
	Springs			t_1	t_{1s}	t_2	t_{2c}	[lb-ft]				
	6	4	2	[ms]	[ms]	[ms]	[ms]	10 c/h	100 c/h	1000 c/h		
FD02	—	31	15	30	15	80	9	3300	1050	130	11	17
FD03	44	31	15	50	20	100	12	5200	1400	170	18	24
FD53	66	44	22	60	30	100	12					
FD04	133	88	44	80	35	140	15	7400	2300	260	27	33
FD14												
FD05	354	230	115	130	65	170	20	13300	3300	370	37	45
FD15	354	230	115	130	65	170	20					
FD55	487	327	159	—	65	170	20					
FD06S	831	354	177	—	80	220	25	15000	3500	400	52	55
FD56	—	664	327	—	90	150	20	21500	5500	600	59	65
FD06		885	443		100	150	20					
FD07	1328	885	443	—	120	200	25	29500	6900	750	96	65
FD08*	2200	1770	1500	—	140	350	30	44500	10300	1100	170	100
FD09**	3540	2650	1770	—	200	450	40	51500	7600	1250	170	120

* brake torque values obtained with 9, 7 and 6 springs, respectively

** brake torque values obtained with 12, 9 and 6 springs, respectively

Key:

t_1 = brake release time with half-wave rectifier
 t_{1s} = brake release time with over-energizing rectifier
 t_2 = brake engagement time with AC line disconnect and separate power supply
 t_{2c} = brake engagement time with AC and DC line disconnect.
 Values for t_1 , t_{1s} , t_2 , t_{2c} indicated in the tab. (C22) are referred to brake set at maximum torque, medium air gap and rated voltage


W_{max} = max energy per each brake operation
 W = braking energy between two successive air gap adjustments
 P_b = brake power absorption at normal ambient temperature
 T_b = static braking torque ($\pm 15\%$)
 [s/h] = starts per hour

FD brake connections

On standard single-speed motors, the rectifier is connected to the motor terminal board at the factory.


Because the load is of the inductive type, brake control and DC line switch must use contacts from the usage class AC-3 to IEC 60947-4-1.

(C22)

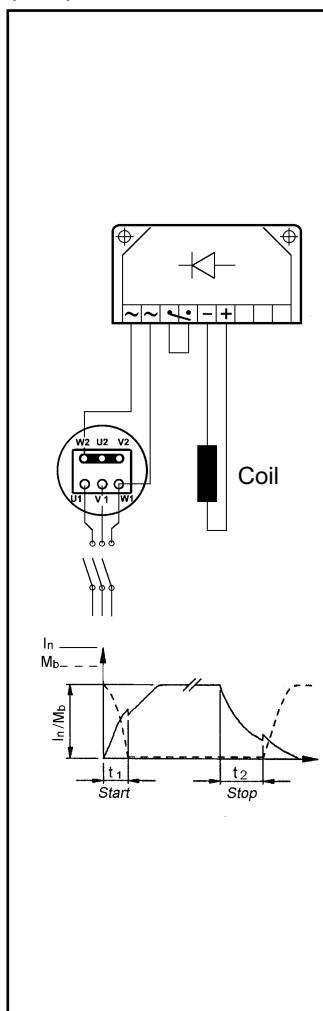


Brake supply from motor terminals and A.C. line disconnect. Longer stop time t_2 , dependent on motor time constants. Use when no particular braking performance is required.

(C23)

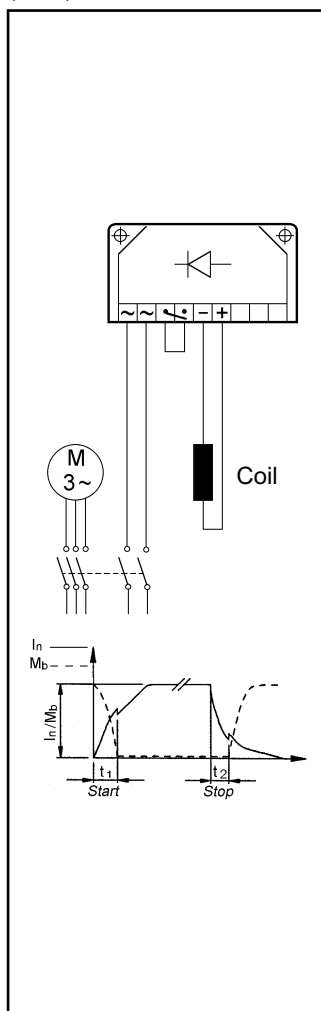


Separate power supply to brake coil and A.C. line disconnect. Stopping time is independent on motor. See table C21

(C24)

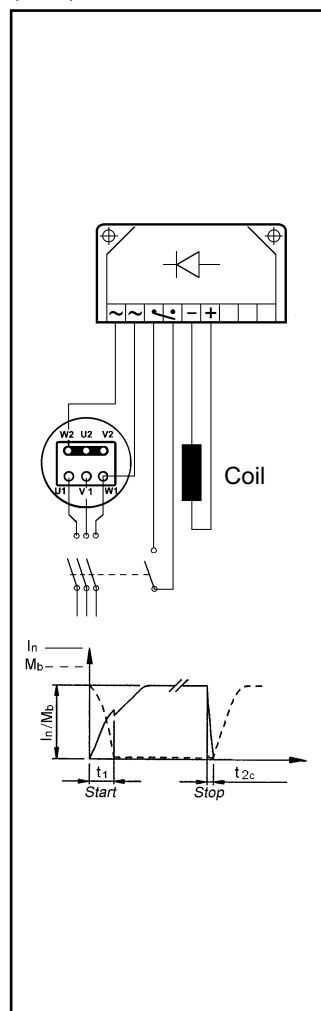

Brake coil energized from motor terminals, both A.C. and D.C. line switch off. Rapid stopping time, t_{2c} . See table C21

(C25)

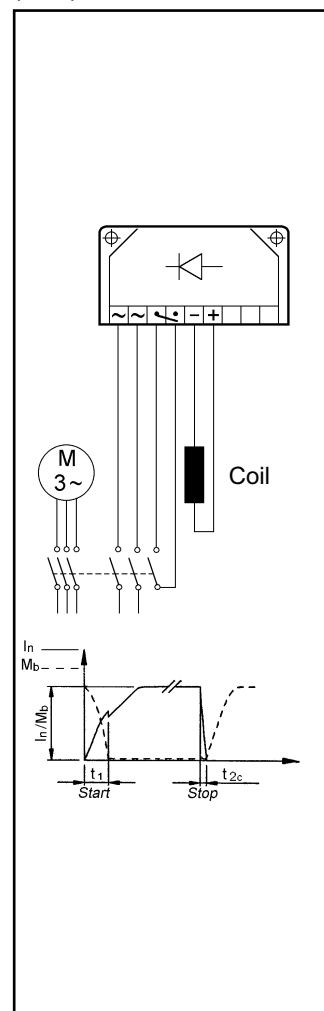


Separate power supply to brake coil. Both A.C. and D.C. line disconnect. Rapid stopping time to t_{2c} value, see table C21

3.7 AC BRAKE MOTORS TYPE BN_FA

Frame sizes: BN 63 ... BN 180M

(C26)

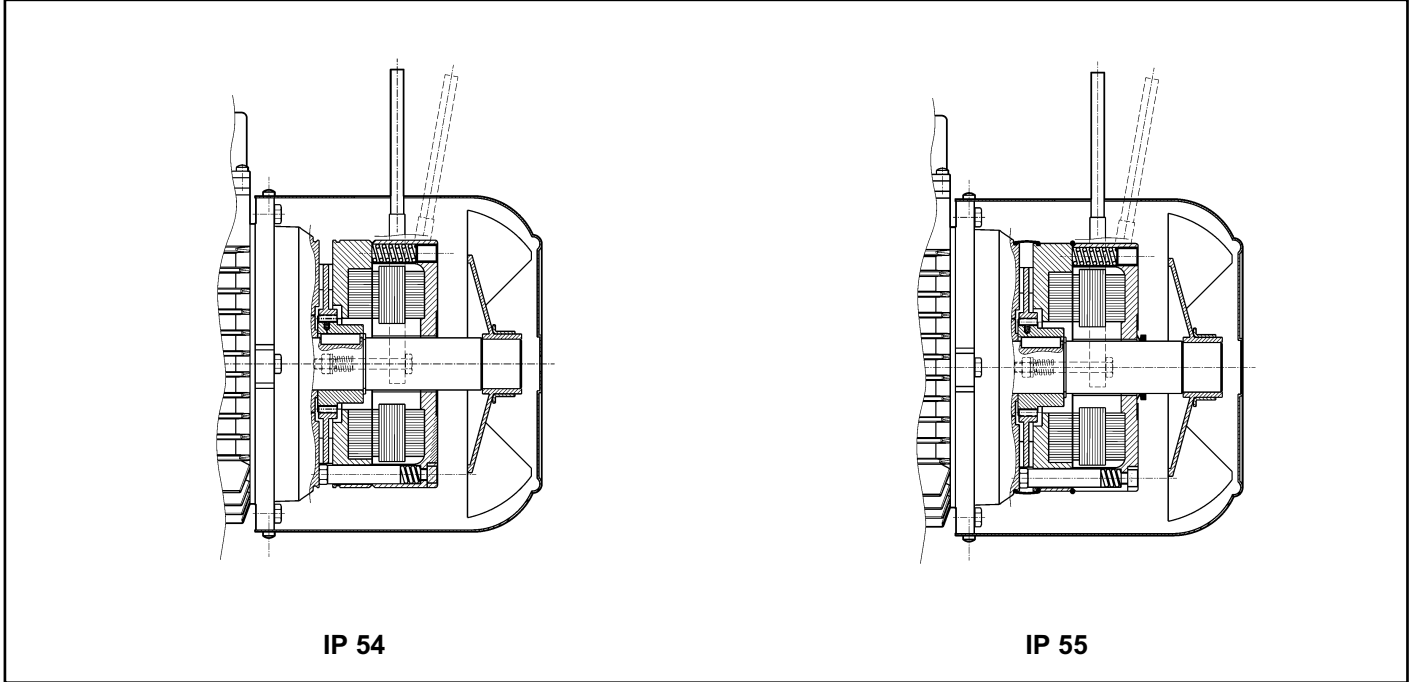

Electromagnetic brake operates from three-phase **alternated current** power supply and is bolted onto motor rear shield. Preloaded springs provide axial positioning of the magnet body.

Steel brake disc slides axially on steel hub fitted onto motor shaft with anti-vibration spring.

Brake torque factory setting is indicated in the corresponding motor rating charts.

Spring preloading screws provide stepless braking torque adjustment.

Torque adjustment range is $30\% T_{bMAX} < T_b < T_{bMAX}$ (where T_{bMAX} is maximum braking torque as shown in tab. (C28).

Thanks to their high dynamic characteristics, FA brakes are ideal for heavy-duty applications as well as applications requiring frequent stop/starts and fast response time.

Motors may be equipped with manual release lever with automatic return (**R**) at request. See table (C32) for available lever locations.

Degree of protection

Standard degree of protection is IP54.

Brake motor BN_FA is also available with degree of protection **IP 55**, which incorporates the following variants:

- V-ring at N.D.E. of motor shaft
- water-proof rubber grommet
- O-ring

FA brake power supply

Depending on motor voltage the brake may require the supply voltage to be specified, or not, as detailed in the

diagram below. Special voltages in the 24...690 V range may be available on request.

(C27)

Motor voltage - V_{mot}	Brake voltage - V_B	Specify	Brake wiring scheme		
230/460 V YY/Y 60 Hz	230 Δ - 60 Hz	230SA	Motor terminal board 	Auxiliary terminal board 	Δ Connected
	460 Y - 60 Hz	460SA			Y Connected
330/575 V Δ /Y 60 Hz	330/575 V Δ /Y 60 Hz	not required			

Technical specifications of FA brakes

(C28)

Brake	Brake torque T_b [lb·in]	Release t_1 [ms]	Braking t_2 [ms]	W_{max} [lb·ft]			W [lb·ftx10 ⁶]	P_b [VA]
				10 s/h	100 s/h	1000 s/h		
FA 02	31	4	20	4500	1400	180	15	60
FA 03	66	4	40	7000	1900	230	25	80
FA 04	133	6	60	10000	3100	350	30	110
FA 14								
FA 05	354	8	90	18000	4500	500	50	250
FA 15								
FA 06S	530	16	120	20000	4800	550	70	470
FA 06	663	16	140	29000	7400	800	80	550
FA 07	1328	16	180	40000	9300	1000	130	600
FA 08	2200	20	200	60000	14000	1500	230	1200

Key:

T_b = max static braking torque ($\pm 15\%$)

t_1 = brake release time

t_2 = brake engagement time

W_{max} = max energy per brake operation (brake thermal capacity)

W = braking energy between two successive air gap adjustments

P_b = power drawn by brake at 20° (50 Hz)

[s/h] = starts per hour

NOTE


Values t_1 and t_2 in the table refer to a brake set at rated torque, medium air gap and rated voltage.

3.8 - BRAKE RELEASE SYSTEMS

Spring-applied brakes type **FD** and **FA** may be equipped with optional manual release devices. These are typically used for manually releasing the brake before servicing any machine or plant parts operated by the motor.

R


(C29)

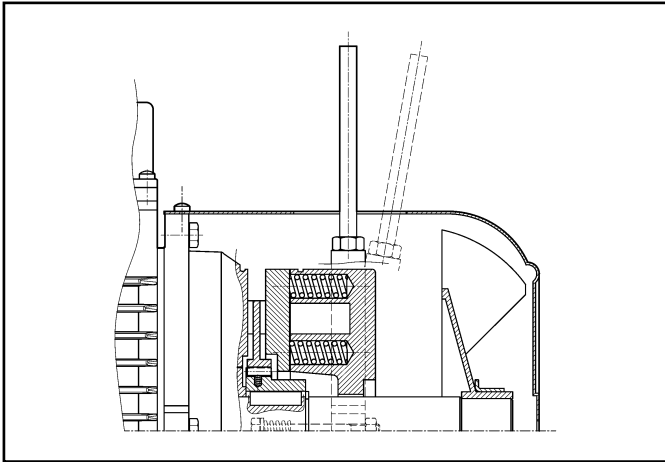

A return spring brings the release lever back in the original position.

RM

(C30)

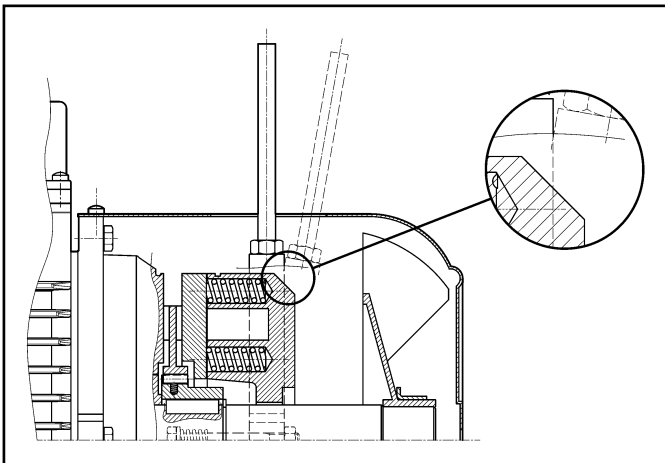

On motors type BN_FD, if the option RM is specified, the release lever may be locked in the "release" position by tightening the lever until lever end becomes engaged with a brake housing projection.

The availability for the two lever options is charted here below:

(C31)


	R	RM
BN_FD	BN 63...BN 200	BN 63...BN 160MR
M_FD	M 05...M 5	M 05...M 4LC
BN_FA	BN 63...BN 180M	n.a.
M_FA	M 05...M 5	

Release lever arrangement

Unless otherwise specified, the release lever is located 90° away from the terminal box – identified by letters **[AB]** in the diagram below – in a clockwise direction on both options **R** and **RM**.

Alternative lever positions **[AA]**, **[AC]** and **[AD]** are also possible when the corresponding option is specified:



(C32)

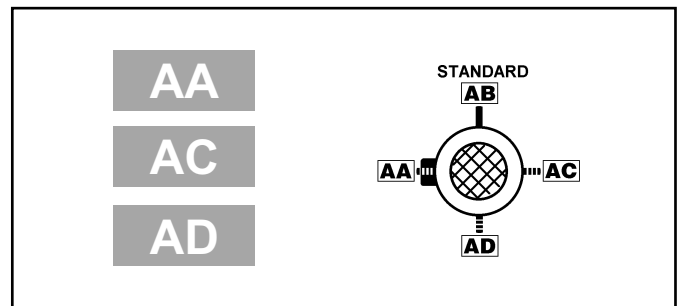

Fly-wheel data (F1)

The table below shows values of weight and inertia of flywheel (option F1). Overall dimensions of motors remain unchanged. The option is available for DC brake-motors only.

(C33)

Main data for flywheel			
		Fly-wheel weight [lbs]	Fly-wheel inertia [lb • ft ²] x 10 ⁻⁵
BN 63	M05	0.31	2.7
BN 71	M1	0.51	5.7
BN 80	M2	0.76	11.4
BN 90 BN 90 L	–	1.14	22.3
BN 100	M3	1.58	35.4
BN 112	–	2.19	62.4
BN 132 S BN 132 M	M4	2.81	108.6

3.9 - SPECIAL EXECUTIONS

Thermal protective devices

In addition to the standard protection provided by the magneto-thermal device, motors can be supplied with built-in thermal probes to protect the winding against overheating caused, by insufficient ventilation or by an intermittent duty.

This additional protection should always be specified for servoventilated motors (IC416).

E3

Thermistors

These are semi-conductors having rapid resistance variation when they are close to the rated switch off temperature.

Variations of the $R = f(T)$ characteristic are specified under DIN 44081, IEC 34-11 Standards.

These elements feature several advantages: compact dimensions, rapid response time and, being contact-free, absolutely no wear.

Positive temperature coefficient thermistors are normally used (also known as PTC “cold conductor resistors”).

Unlike bimetallic thermostates, they cannot directly in-

tervene on currents of energizing coils, and must therefore be connected to a special control unit (triggering apparatus) to be interfaced with the external connections.

Thus protected, three PTCs connected in series are installed in the winding, the terminals of which are located on the auxiliary terminal-board.

Bimetallic thermostates

These types of protective devices house a bimetal disk. When the rated switch off temperature is reached, the disk switches the contacts from their initial rest position. As temperature falls, the disk and the contacts automatically return to rest position.

Three bimetallic thermostates connected in series are usually employed, with normally closed contacts. The terminals are located in an auxiliary terminal-board.



H1

Anti-condensation heaters

Where an application involves high humidity or extreme temperature fluctuation, motors may be equipped with an anti-condensate heater.

A single-phase power supply is available in the auxiliary terminal board inside the main terminal box. Values for the absorbed power are listed here below:

(C34)

		H1 1~ 230V ± 10% P [W]
BN 56...BN 80	M0...M2	10
BN 90...BN 160MR	M3 - M4	25
BN 160M...BN 180M	M5	50
BN 180L...BN 200L	–	65

Warning!

Always disconnect power supply to the anti-condensate heater before operating the motor.

AL

AR

Backstop device

For applications where backdriving must be avoided, motors equipped with an anti run-back device can be used (available for the M series only).

While allowing rotation in the direction required, this device operates instantaneously in case of a power failure, preventing the shaft from running back.

The anti run-back device is life lubricated with special grease for this specific application.

When ordering, customers should indicate the required rotation direction, AL or AR.


Never use the anti run-back device to prevent reverse rotation caused by faulty electrical connection.

Table (C35) shows rated and maximum locking torques for the anti run-back devices.


A diagram of the device can be seen in Table (C36).

Overall dimensions are same as the corresponding brake motor.

(C35)

	Rated locking torque	Max. locking torque	Release speed
	[lb·in]	[lb·in]	[rpm]
M1	53	90	750
M2	140	240	650
M3	480	815	520
M4	970	1815	430

(C36)

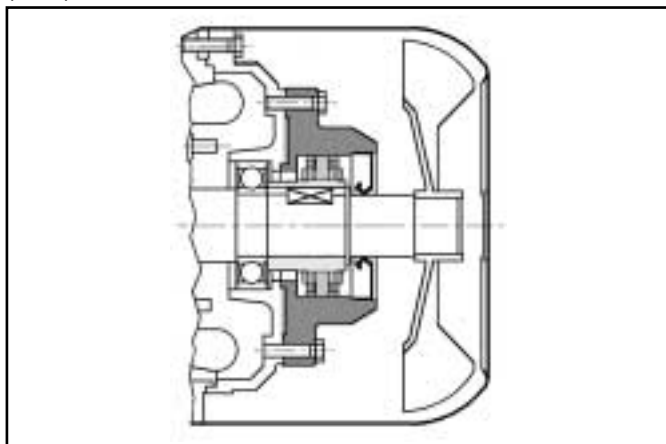

Ventilation

Motors are cooled through outer air blow (IC 411 according to CEI EN 60034-6) and are equipped with a plastic radial fan, which operates in both directions.

Ensure that fan cover is installed at a suitable distance from the closest wall so to allow air circulation and servicing of motor and brake, if fitted.



On request, motors can be supplied with independently power-supplied forced ventilation system starting from BN 71 or M1 size.

Motor is cooled by an axial fan with independent power supply and fitted on the fan cover (IC 416 cooling system).

This option comes handy for inverter driven motors so that constant torque operation is possible even at low speed or when high starting frequencies are needed.

Motors with rear shaft projection (PS option) are excluded.

(C37)



Power supply					
		V a.c. ± 10%	Hz	P [W]	I [A]
BN 71	M1	1~ 230	50 / 60	22	0.14
BN 80	M2			22	0.14
BN 90	–			40	0.25
BN 100 (*)	M3			50	0.25
BN 112	–	3~ 230 Δ / 400Y	50 / 60	50	0.26 / 0.15
BN 132S	M4S			110	0.38 / 0.22
BN 132M... BN160MR	M4L				
BN 160... BN 180M	M5	3~460	60	210	1.25 / 0.72



This variant features two options, designated **U1** and **U2**, having the same length overall.

Longer side of fan cover (ΔL) is specified for both models in the table below. Overall dimension can be reckoned from motor size table.

(C38)

Extra length for servoventilated motors [in]			
		ΔL_1 add for standard motor	ΔL_2 add for brakemotor
BN 71	M1	3.66	1.26
BN 80	M2	5.00	2.17
BN 90	–	5.16	1.89
BN 100	M3	4.69	1.10
BN 112	–	5.12	1.22
BN 132S	M4S	6.34	2.01
BN 132M	M4L	6.34	2.01

U1



Fan wiring terminals are housed in a separate terminal box.

In brake motors of size BN 71...BN 160MR, with **U1** model, the release lever cannot be positioned to AA.



U2



Fan terminals are wired in the motor terminal box.

The option does not apply to BN160M...BN200L motors.

(C39)

(*)			V a.c. \pm 10%	Hz	P [W]	I [A]
	BN 100_U2	M3	3~ 230 Δ / 400Y	50 / 60	40	0.24 / 0.14

RC



Drip cover

The drip cover protects the motor from dripping and avoids the ingress of solid bodies. It is recommended when motor is installed in a vertical position with the shaft downwards.


Relevant dimensions are indicated in the table (C40).

The drip cover is not compatible with variants PS, EN1, EN2, EN3 and will not fit motors equipped with a BA brake.

(C40)

		AQ [in]	ΔV [in]
BN 63	M05	118	24
BN 71	M1	134	27
BN 80	M2	134	25
BN 90	–	168	30
BN 100	M3	168	28
BN 112	–	211	32
BN 132...BN 160MR	M4	211	32
BN 160M...BN 180M	M5	270	36
BN 180L...BN 200L	–	310	36

(C41)

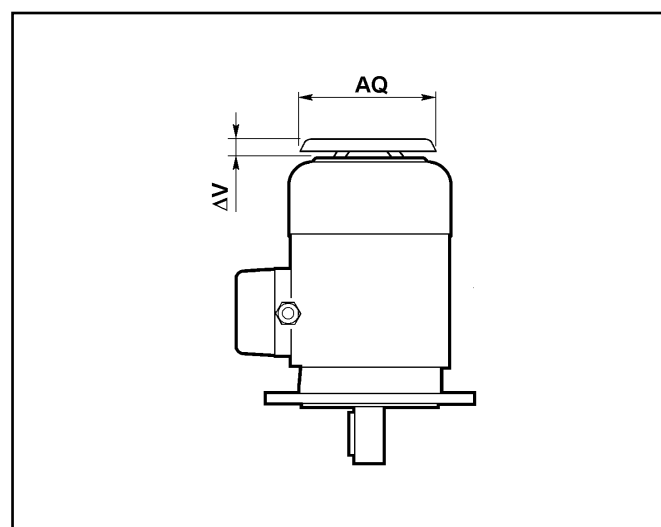

TC

Textile canopy

Option TC is a cover variant for textile industry environments, where lint may obstruct the fan grid and prevent a regular flow of cooling air.

This option is not compatible with variants EN1, EN2, EN3. Overall dimensions are the same as drip cover type RC.

Feedback units

Motors may be combined with three different types of encoders to achieve feedback circuits.

Configurations with double-extended shaft (PS) and rain canopy (RC, TC) are not compatible with the installation of the encoder.

EN1

Incremental encoder, $V_{IN}=5\text{ V}$, line-driver output RS 422.

EN2

Incremental encoder, $V_{IN}=10\text{-}30\text{ V}$, line-driver output RS 422.

EN3

Incremental encoder, $V_{IN}=12\text{-}30\text{ V}$, push-pull output 12-30 V.


(C42)

	EN1	EN2	EN3
Interface	RS 422	RS 422	push-pull
Power supply voltage [V]	4...6	10...30	12...30
Output voltage [V]	5	5	12...30
No-load operating current [mA]	120	100	100
No. of pulses per revolution	1024		
No. of signals	6 (A, B, C + inverted signals)		
Max. output frequency [kHz]	300	300	200
Max. speed [rpm]	600 (900 rpm x 10s)		
Temperature range [°C]	-20...+70		
Protection class	IP 65		

3.10 COMPACT MOTOR RATING CHARTS

2 POLE - 3600 rpm - S1

60 HZ


HP	P _n kW		n rpm	T _n lb-in	η %	cosφ	I _n at 460V A	I _s I _n %	T _s T _n %	T _k T _n %	J _m lb-ft ²		Weight lbs 1)	Brake type	T _b lb-in	Z _o 1/h		Weight lbs 2)	Brake type	T _b lb-in	Z _o 1/h		Weight lbs 2)	
											1)	2)				3)	4)				3)	4)		
0.25	0.18	M 05A 2	3380	4.7	60	0.74	0.53	410	300	320	0.0048	0.0062	7.1	FD 02	15	2700	3300	10.8	FA 02	15	2700	3300	10.4	
0.33	0.25	M 05B 2	3400	6.1	65	0.75	0.63	490	320	330	0.0055	0.0071	7.9	FD 02	15	2700	3300	11.7	FA 02	15	2700	3300	11.2	
0.5	0.37	M 05C 2	3420	9.2	69	0.76	0.89	550	330	350	0.0062	0.0078	10.6	FD 02	30	2500	3000	14.3	FA 02	30	2500	3000	13.9	
0.75	0.55	M 1SD 2	3450	13.7	76	0.75	1.23	620	340	390	0.0097	0.0126	12.8	FD 03	44	2200	2700	18.7	FA 03	44	2200	2700	18.1	
1	0.75	M 1LA 2	3440	18.3	77	0.75	1.62	620	380	410	0.0119	0.0145	15.2	FD 03	44	1500	2100	21	FA 03	44	1500	2100	21	
1.5	1.1	M 2SA 2	3430	27.6	77	0.76	2.40	620	380	390	0.0214	0.0252	19.4	FD 04	88	1200	1600	28	FA 04	88	1200	1600	28	
2	1.5	M 2SB 2	3420	36.8	80	0.81	2.89	600	330	350	0.0271	0.0309	23	FD 04	133	1000	1300	32	FA 04	133	1000	1300	32	
3	2.2	M 3SA 2	3430	55	81	0.83	4.2	600	240	250	0.0570	0.0665	34	FD 15	230	800	1000	49	FA 15	230	800	1000	51	
5	3.7	M 3LB 2	3490	92	84	0.83	6.7	670	290	320	0.0926	0.102	49	FD 15	354	360	500	62	FA 15	354	360	500	64	
7.5	5.5	M 4SA 2	3490	135	83	0.86	9.8	640	270	300	0.240	0.266	72	FD 06	440	400	400	101	FA 06	440	400	400	104	
10	7.5	M 4SB 2	3490	181	82	0.88	13.0	620	280	320	0.318	0.344	88	FD 06	440	350	350	117	FA 06	440	350	350	143	
15	11	M 4LC 2	3510	271	87	0.88	18.3	690	270	300	0.499		132											
20	15	M 5SB 2	3510	359	86	0.90	24.2	600	250	270	0.808		154											
25	18.5	M 5SC 2	3520	449	88	0.91	29.2	690	280	300	0.998		183											
30	22	M 5LA 2	3520	537	88	0.91	35.1	690	280	310	1.164		209											

1) Inertia without brake
2) Inertia with brake

3) Permissible starts with NB rectifier (AC/DC)
4) Permissible starts with SB rectifier (AC/DC)

4 POLE - 1800 rpm - S1

60 HZ

P _n		n	T _n	η	cosφ	I _n at 460V	I _s I _n	T _s T _n	T _k T _n	J _m lb-ft ²		Weight lbs	Brake type	T _b	Z _o 1/h		Weight lbs	Brake type	T _b	Z _o 1/h		Weight lbs	
										1)	2)				3)	4)				1)	2)		3)
0.12	0.09	M 0B 4	1670	59	0.52	0.37	280	290	290	0.0356		6.4											
0.16	0.12	M 05A 4	1690	60	0.57	0.44	330	240	250	0.0048	0.0062	7.1	FD 02	15	7000	9000	10.8	FA 02	15	9000	9000	10.4	
0.25	0.18	M 05B 4	1670	58	0.60	0.65	320	280	290	0.0055	0.0071	7.9	FD 02	30	7000	9000	11.7	FA 02	30	9000	9000	11.2	
0.33	0.25	M 05C 4	1670	64	0.64	0.77	330	250	260	0.0078	0.0093	10.6	FD 02	30	6000	8000	14.3	FA 02	30	8000	8000	13.9	
0.50	0.37	M 1SD 4	1700	66	0.73	0.96	450	260	280	0.0164	0.0190	12.1	FD 03	44	4800	7500	18.1	FA 03	44	7500	7500	17.4	
0.75	0.55	M 1LA 4	1710	72	0.70	1.37	490	300	310	0.0216	0.0242	15.2	FD 53	66	3400	7000	21	FA 53	66	7000	7000	21	
1	0.75	M 2SA 4	1720	78	0.75	1.61	620	340	350	0.0482	0.0523	20	FD 04	133	3000	6000	29	FA 04	133	6000	6000	29	
1.5	1.1	M 2SB 4	1720	78	0.76	2.33	630	340	350	0.0594	0.0641	23	FD 04	133	2000	4200	32	FA 04	133	4200	4200	32	
2	1.5	M 3SA 4	1720	82	0.73	3.15	570	290	330	0.0808	0.0903	34	FD 15	230	1500	3000	49	FA 15	230	3000	3000	51	
3	2.2	M 3LA 4	1720	81	0.73	4.67	550	270	290	0.0960	0.105	37	FD 15	354	1000	2700	53	FA 15	354	2700	2700	53	
5	3.7	M 3LC 4	1730	84	0.74	7.5	560	280	310	0.145	0.154	51	FD 55	480	1200	1200	64	FA 55	480	1200	1200	66	
7.5	5.5	M 4SA 4	1730	84	0.84	9.8	630	290	310	0.506	0.530	93	FD 56	664	850	850	121	FA 06	664	850	850	124	
10	7.5	M 4LA 4	1740	85	0.84	13.2	610	290	300	0.641	0.665	112	FD 06	885	700	700	141	FA 06	885	700	700	143	
15	11	M 4LC 4	1740	88	0.81	19.4	650	310	320	0.855	0.907	143	FD 07	1328	600	600	179	FA 07	1328	600	600	183	
20	15	M 5SB 4	1750	90	0.84	24.9	580	230	270	1.544	1.781	187	FD 08	1770	400	400	254	FA 08	1770	400	400	251	
25	18.5	M 5LA 4	1760	90	0.83	31.1	580	250	310	1.876	2.054	223	FD 08	2210	300	300	289	FA 08	2210	300	300	287	

1) Inertia without brake


2) Inertia with brake

3) Permissible starts with NB rectifier (AC/DC)

4) Permissible starts with SB rectifier (AC/DC)

6 POLE - 1200 rpm - S1

60 HZ

P _n		n	T _n	η	cosφ	I _n at 460V	I _s I _n	T _s T _n	T _k T _n	J _m lb-ft ²		Weight lbs	Brake type	T _b	Z _o 1/h		Weight lbs	Brake type	T _b	Z _o 1/h		Weight lbs
										1)	2)				3)	4)				1)	2)	
0.12	0.09	M 05A 6	6.9	47	0.46	0.52	240	290	290	0.0081	0.0095	9.5	FD 02	30	7000	10000	13.2	FA 02	30	10000	10000	12.8
0.16	0.12	M 05B 6	9.2	49	0.54	0.57	230	240	240	0.0088	0.0102	10.1	FD 02	30	7000	10000	13.9	FA 02	30	10000	10000	13.4
0.25	0.18	M 1SC 6	14.3	61	0.65	0.57	330	260	280	0.0200	0.0226	11.2	FD 03	44	6500	10000	17.2	FA 03	44	10000	10000	16.5
0.33	0.25	M 1SD 6	18.9	64	0.65	0.75	320	260	270	0.0259	0.0290	13.9	FD 03	44	6200	8000	19.8	FA 03	44	8000	8000	19.2
0.50	0.37	M 1LA 6	28.6	66	0.65	1.08	330	260	270	0.0306	0.0330	16.1	FD 53	66	4000	7000	22	FA 03	66	7000	7000	21
0.75	0.55	M 2SA 6	41.4	76	0.66	1.38	490	320	340	0.0594	0.0641	23	FD 04	133	3800	5000	32	FA 04	133	5000	5000	32
1	0.75	M 2SB 6	55	76	0.61	2.03	440	280	300	0.0665	0.0713	25	FD 04	133	2700	5000	34	FA 04	133	5000	5000	34
1.5	1.1	M 3SA 6	83	74	0.68	2.74	440	240	280	0.147	0.157	37	FD 15	230	2300	4500	51	FA 15	230	4500	4500	53
2	1.5	M 3LA 6	111	76	0.66	3.75	450	240	280	0.195	0.204	46	FD 15	354	1500	3000	60	FA 15	354	3000	3000	62
3	2.2	M 3LC 6	166	77	0.68	5.3	510	260	290	0.226	0.235	51	FD 55	480	1500	1500	64	FA 15	480	1500	1500	66
5	3.7	M 4LA 6	274	80	0.79	7.3	610	250	310	0.701	0.724	95	FD 06	885	900	123	FA 06	885	900	900	126	
7.5	5.5	M 4LB 6	414	82	0.75	11.2	540	270	290	0.910	0.964	119	FD 07	1328	800	154	FA 07	1328	800	800	159	
10	7.5	M 5SA 6	543	85	0.82	13.5	580	230	280	1.758	1.936	152	FD 08	1500	550	216	FA 08	1500	550	550	216	
15	11	M 5SB 6	815	84	0.83	19.8	580	250	290	2.304	2.482	196	FD 08	1770	400	262	FA 08	1770	400	400	260	


1) Inertia without brake
2) Inertia with brake

3) Permissible starts with NB rectifier (AC/DC)
4) Permissible starts with SB rectifier (AC/DC)

3.11 IEC MOTOR RATING CHARTS

2 POLE - 3600 rpm - S1

60 HZ


P _n HP	kW		n rpm	T _n lb-in	η %	cosφ	I _n at 460V A	$\frac{I_s}{I_n}$ %	$\frac{T_s}{T_n}$ %	$\frac{T_k}{T_n}$ %	J _m lb-ft ²		Weight lbs 1)	Brake type	T _b lb-in	Z _c 1/h		Weight lbs 2)	Brake type	T _b lb-in	Z _c 1/h		Weight lbs 2)		
											1)	2)				3)	4)				3)	4)			
0.25	0.18	BN 63A	2	3360	2	4.7	58	0.74	0.55	370	290	300	0.0048	0.0062	7.7	FD 02	15	2700	3300	10.7	FA 02	15	2700	3300	11.0
0.33	0.25	BN 63B	2	3370	2	6.2	61	0.73	0.69	420	290	300	0.0055	0.0071	8.6	FD 02	15	2700	3300	11.5	FA 02	15	2700	3300	11.9
0.5	0.37	BN 71A	2	3420	2	9.2	71	0.77	0.86	580	330	380	0.0082	0.0109	11.9	FD 03	30	2400	3200	16.6	FA 03	30	2400	3200	17.2
0.75	0.55	BN 71B	2	3450	2	13.7	76	0.75	1.23	620	340	390	0.0097	0.0126	13.7	FD 03	44	2200	2700	18.2	FA 03	44	2200	2700	19.0
1	0.75	BN 80A	2	3440	2	18.3	76	0.76	1.62	590	310	370	0.0185	0.0223	19.0	FD 04	44	1400	1700	26	FA 04	44	1400	1700	27
1.5	1.1	BN 80B	2	3430	2	27.6	77	0.76	2.40	620	380	390	0.0214	0.0252	21	FD 04	88	1200	1600	27	FA 04	88	1200	1600	29
2	1.5	BN 90SA	2	3480	2	36.2	79	0.78	3.04	730	360	380	0.0297	0.0335	27	FD 14	133	750	1000	34	FA 14	133	750	1000	36
3	2.2	BN 90L	2	3490	2	54	81	0.79	4.4	730	380	390	0.0397	0.0435	31	FD 05	230	750	1000	41	FA 05	230	750	1000	46
5	3.7	BN 100LB	2	3490	2	90	84	0.83	6.7	670	290	320	0.0926	0.102	51	FD 15	354	360	500	59	FA 15	354	360	500	66
7.5	5.5	BN 132SA	2	3490	2	135	83	0.86	9.8	640	270	300	0.240	0.266	77	FD 06	440	400	98	FA 06	440	400	400	108	
10	7.5	BN 132SB	2	3490	2	181	82	0.88	13.0	620	280	320	0.318	0.344	93	FD 06	440	350	113	FA 06	440	350	350	123	
15	11	BN 160MR	2	3510	2	271	87	0.88	18.3	690	270	300	0.499	0.499	143										
20	15	BN 160MB	2	3510	2	359	86	0.90	24.2	600	250	270	0.808	0.808	185										
25	18.5	BN 160L	2	3520	2	449	88	0.91	29.2	690	280	300	0.998	0.998	214										
30	22	BN 180M	2	3520	2	537	88	0.91	35.1	690	280	310	1.164	1.164	240										
40	30	BN 200L	2	3530	2	716	89	0.91	46.2	690	260	300	1.829	1.829	309										

1) Inertia without brake
2) Inertia with brake

3) Permissible starts with NB rectifier (AC/DC)
4) Permissible starts with SB rectifier (AC/DC)

4 POLE - 1800 rpm - S1

60 HZ

P _n		n rpm	T _n lb.in	η %	cosφ	I _n at 460V A	$\frac{I_s}{I_n}$ %	$\frac{T_s}{T_n}$ %	$\frac{T_k}{T_n}$ %	J _m lb.·ff		Weight lbs 1)	Brake type	T _b lb.in	Z _o 1/h 3)	Weight lbs 2)	Brake type	T _b lb.in	Z _o 1/h 4)	Weight lbs 2)	
										1)	2)										
0.08	0.06	BN 56A 4	1670	3.0	53	0.26	290	310	310	0.0036	6.8										
0.12	0.09	BN 56B 4	1670	4.5	59	0.37	280	290	290	0.0036	6.8										
0.16	0.12	BN 63A 4	1650	6.1	55	0.43	310	240	250	0.0048	7.7		FD 02	15	7000	11.5	FA 02	15	9000	11.0	
0.25	0.18	BN 63B 4	1670	9.4	58	0.68	310	280	290	0.0055	8.6		FD 02	30	7000	12.3	FA 02	30	9000	11.9	
0.33	0.25	BN 71A 4	1700	12.2	64	0.65	430	260	270	0.0138	11.2		FD 03	30	6000	17.2	FA 03	30	8500	16.5	
0.50	0.37	BN 71B 4	1700	18.5	66	0.97	450	260	280	0.0164	13.0		FD 03	44	4800	19.0	FA 03	44	7500	18.3	
0.75	0.55	BN 80A 4	1710	27.6	73	1.28	490	300	300	0.0356	18.1		FD 04	89	3400	27	FA 04	89	7000	26	
1	0.75	BN 80B 4	1720	36.6	78	1.60	620	340	350	0.0482	22		FD 04	133	3000	30	FA 04	133	6000	30	
1.5	1.1	BN 90S 4	1720	55	78	2.43	570	310	340	0.0499	27		FD 14	133	3000	36	FA 14	133	7000	36	
2	1.5	BN 90LA 4	1720	73	81	3.12	660	330	360	0.0665	30		FD 05	230	2200	43	FA 05	230	4700	45	
3	2.2	BN 100LA 4	1720	110	81	4.8	550	270	290	0.0960	40		FD 15	354	1000	55	FA 15	354	2700	55	
5	3.7	BN 100LC 4	1730	182	84	7.5	560	280	310	0.145	55		FD 55	480	1200	66	FA 15	480	1200	64	
5.5	4	BN 112M 4	1730	200	85	8.0	700	310	340	0.233	66		FD 06S	530	850	88	FA 06S	530	850	93	
7.5	5.5	BN 132S 4	1730	273	84	10.0	630	290	310	0.506	97		FD 56	664	850	126	FA 06	664	850	128	
10	7.5	BN 132MA 4	1740	362	85	13.1	610	290	300	0.641	117		FD 06	885	700	146	FA 07	885	700	157	
15	11	BN 160MR 4	1740	543	88	19.4	650	310	320	0.855	154		FD 07	1328	600	190	FA 07	1328	600	194	
20	15	BN 160L 4	1750	720	90	24.8	580	230	270	1.544	218		FD 08	1770	400	284	FA 08	1770	400	282	
25	18.5	BN 180M 4	1760	895	90	31.3	580	250	310	1.876	254		FD 08	2210	300	320	FA 08	2210	300	317	

1) Inertia without brake


2) Inertia with brake

3) Permissible starts with NB rectifier (AC/DC)

4) Permissible starts with SB rectifier (AC/DC)

6 POLE - 1200 rpm - S1


60 HZ

P _n		n rpm	T _n lb-in	η %	cosφ	I _n at 460V A	I _s I _n %	T _s T _n %	T _k T _n %	J _m lb-ft ²	Weight lbs	Brake type	T _b lb-in	Z ₀ 1/h	Weight lbs	Brake type	T _b lb-in	Z ₀ 1/h	Weight lbs	Z ₀ 1/h	Weight lbs	Z ₀ 1/h	Weight lbs	Z ₀ 1/h	Weight lbs	Z ₀ 1/h	Weight lbs	Z ₀ 1/h	
																													HP
0.12	BN 63A	6	1100	6.9	47	0.50	0.48	280	290	0.0081	10.1	FD 02	30	7000	13.9	FA 02	30	10000	13.4	10000	13.4	10000	13.4	10000	13.4	10000	13.4	10000	13.4
0.16	BN 63B	6	1100	9.2	50	0.55	0.55	240	270	0.0088	10.8	FD 02	30	7000	14.6	FA 02	30	10000	14.1	10000	14.1	10000	14.1	10000	14.1	10000	14.1	10000	14.1
0.25	BN 71A	6	1100	14.3	61	0.65	0.57	330	280	0.0200	12.1	FD 03	44	6500	18.1	FA 03	44	10000	17.4	10000	17.4	10000	17.4	10000	17.4	10000	17.4	10000	17.4
0.33	BN 71B	6	1100	18.9	64	0.65	0.75	320	270	0.0259	14.8	FD 03	44	6200	21	FA 03	44	8000	20	8000	20	8000	20	8000	20	8000	20	8000	20
0.50	BN 80A	6	1130	27.9	67	0.65	1.07	390	280	0.0499	22	FD 04	88	4100	30	FA 04	88	5500	30	5500	30	5500	30	5500	30	5500	30	5500	30
0.75	BN 80B	6	1140	41.4	76	0.66	1.38	490	340	0.0594	25	FD 04	133	3800	34	FA 04	133	5000	33	5000	33	5000	33	5000	33	5000	33	5000	33
1	BN 90S	6	1140	55.3	73	0.63	2.05	450	310	0.0618	29	FD 14	133	2700	37	FA 14	133	4000	37	4000	37	4000	37	4000	37	4000	37	4000	37
1.5	BN 90L	6	1140	83	75	0.65	2.83	430	290	0.0784	33	FD 05	230	2000	46	FA 05	230	3500	49	3500	49	3500	49	3500	49	3500	49	3500	49
2	BN 100LA	6	1140	111	76	0.66	3.75	450	280	0.195	49	FD 15	354	1500	62	FA 15	354	3000	64	3000	64	3000	64	3000	64	3000	64	3000	64
3	BN 112M	6	1150	164	81	0.69	4.9	550	290	0.400	71	FD 06S	530	1250	93	FA 06S	530	1250	97	1250	97	1250	97	1250	97	1250	97	1250	97
5.0	BN 132MA	6	1150	274	80	0.79	7.3	610	3.1	0.701	97	FD 06	885	900	128	FA 07	885	900	139	900	139	900	139	900	139	900	139	900	139
7.5	BN 132MB	6	1140	414	82	0.75	11.2	540	290	0.910	123	FD 07	1328	800	159	FA 07	1328	800	163	800	163	800	163	800	163	800	163	800	163
10	BN 160M	6	1160	543	85	0.82	13.5	580	280	1.758	183	FD 08	1500	550	247	FA 08	1500	550	249	550	249	550	249	550	249	550	249	550	249
15	BN 160L	6	1160	815	84	0.83	19.8	580	290	2.304	227	FD 08	1770	400	293	FA 08	1770	400	293	400	293	400	293	400	293	400	293	400	293


1) Inertia without brake
2) Inertia with brake

3) Permissible starts with NB rectifier (AC/DC)
4) Permissible starts with SB rectifier (AC/DC)

3.12 DIMENSIONS

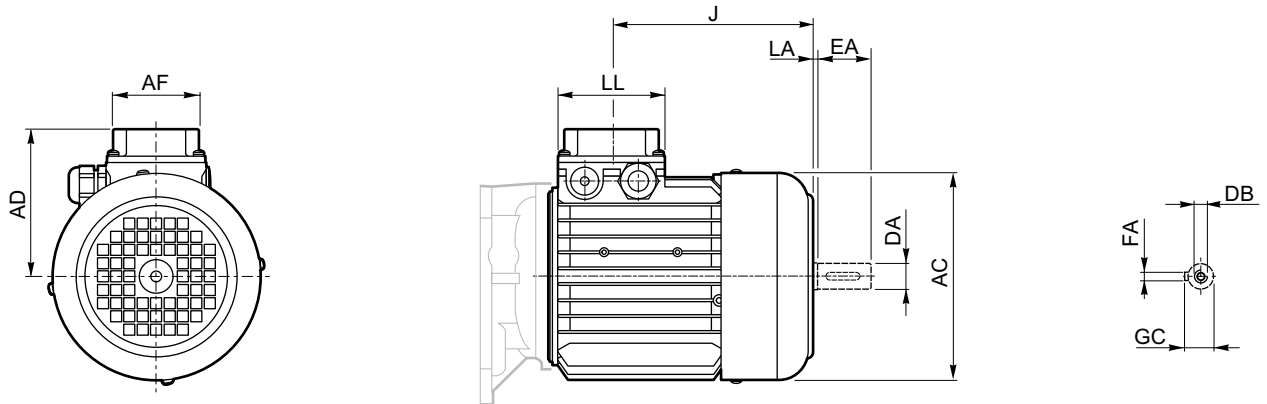


	AC	AD	AF	LL	J	DA	EA	LA	DB	GC	FA
M 0	4.33 110	3.58 91	2.91 74	3.15 80	3.58 91	0.35 9	0.79 20	0.08 2	M3	0.40 10.2	0.12 3
M 05	4.76 121	3.74 95	2.91 74	3.15 80	4.61 117	0.43 11	0.91 23	0.12 3	M4	0.49 12.5	0.16 4
M 1S	5.43 138	4.25 108	2.91 74	3.15 80	4.65 118	0.55 14	1.18 30	0.08 2	M5	0.63 16	0.20 5
M 1L	5.43 138	4.25 108	2.91 74	3.15 80	5.59 142	0.55 14	1.18 30	0.08 2	M5	0.63 16	0.20 5
M 2S	6.14 156	4.69 119	2.91 74	3.15 80	5.98 152	0.75 19	1.57 40	0.12 3	M6	0.85 21.5	0.24 6
M 3S	7.68 195	5.59 142	3.86 98	3.86 98	6.95 176.5	1.10 28	2.36 60	0.12 3	M10	1.22 31	0.31 8
M 3L	7.68 195	5.59 142	3.86 98	3.86 98	8.21 208.5	1.10 28	2.36 60	0.12 3	M10	1.22 31	0.31 8
M 4S	10.16 258	7.60 193	4.65 118	4.65 118	10.18 258.5	1.50 38	3.15 80	0.12 3	M12	1.61 41	0.39 10
M 4L	10.16 258	7.60 193	4.65 118	4.65 118	11.67 296.5	1.50 38	3.15 80	0.12 3	M12	1.61 41	0.39 10
M 4LC	10.16 258	7.60 193	4.65 118	4.65 118	13.05 331.5	1.50 38	3.15 80	0.12 3	M12	1.61 41	0.39 10
M 5S	12.20 310	9.65 245	7.36 187	7.36 187	13.44 341.5	1.50 38	3.15 80	0.16 4	M12	1.61 41	0.39 10
M 5L	12.20 310	9.65 245	7.36 187	7.36 187	15.16 385	1.50 38	3.15 80	0.16 4	M12	1.61 41	0.39 10

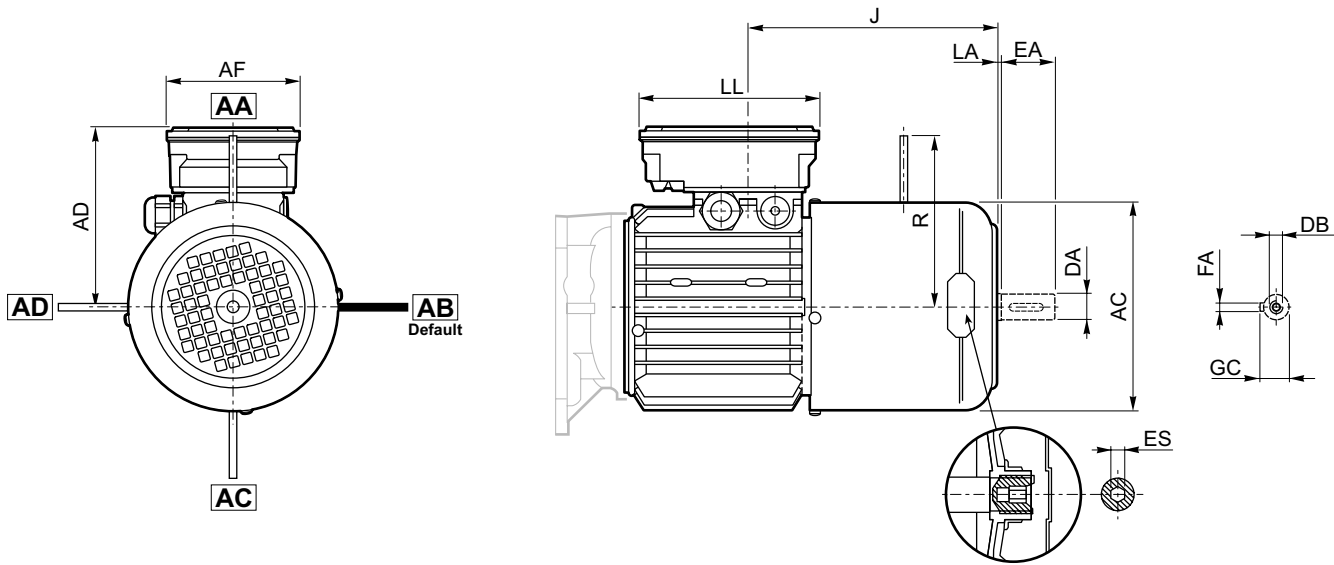

	AC	AD	AF	LL	J	R	DA	EA	LA	DB	GC	FA	ES
M 05	4.76 121	4.69 119	3.86 98	5.24 133	7.20 183	3.78 96	0.43 11	0.91 23	0.08 2	M4	0.49 12.5	0.16 4	0.20 5
M 1S	5.43 138	5.20 132	3.86 98	5.24 133	6.02 153	4.06 103	0.55 14	1.18 30	0.08 2	M5	0.63 16	0.20 5	0.20 5
M 1L	5.43 138	5.20 132	3.86 98	5.24 133	6.89 175	4.06 103	0.55 14	1.18 30	0.08 2	M5	0.63 16	0.20 5	0.20 5
M 2S	6.14 156	5.63 143	3.86 98	5.24 133	7.24 184	5.08 129	0.75 19	1.57 40	0.08 2	M6	0.85 21.5	0.24 6	0.20 5
M 3S	7.68 195	6.10 155	4.33 110	6.50 165	7.95 202	6.30 160	1.10 28	2.36 60	0.12 3	M10	1.22 31	0.31 8	0.24 6
M 3L	7.68 195	6.10 155	4.33 110	6.50 165	9.02 229	6.30 160	1.10 28	2.36 60	0.12 3	M10	1.22 31	0.31 8	0.24 6
M 4S	10.16 258	7.60 193	4.65 118	4.65 118	11.22 285	8.90 226	1.50 38	3.15 80	0.12 3	M12	1.61 41	0.39 10	0.24 6
M 4L	10.16 258	7.60 193	4.65 118	4.65 118	11.22 285	8.90 226	1.50 38	3.15 80	0.12 3	M12	1.61 41	0.39 10	0.24 6
M 4LC	10.16 258	7.60 193	4.65 118	4.65 118	16.97 431	8.90 226	1.50 38	3.15 80	0.12 3	M12	1.61 41	0.39 10	0.24 6
M 5S	12.20 310	9.65 245	7.36 187	7.36 187	18.94 481	10.47 266	1.50 38	3.15 80	0.16 4	M12	1.61 41	0.39 10	—
M 5L	12.20 310	9.65 245	7.36 187	7.36 187	20.67 525	10.47 266	1.50 38	3.15 80	0.16 4	M12	1.61 41	0.39 10	—

NOTE: The hexagonal socket "ES" is not available with the PS option.


Dimensions are $\frac{\text{inch}}{\text{mm}}$

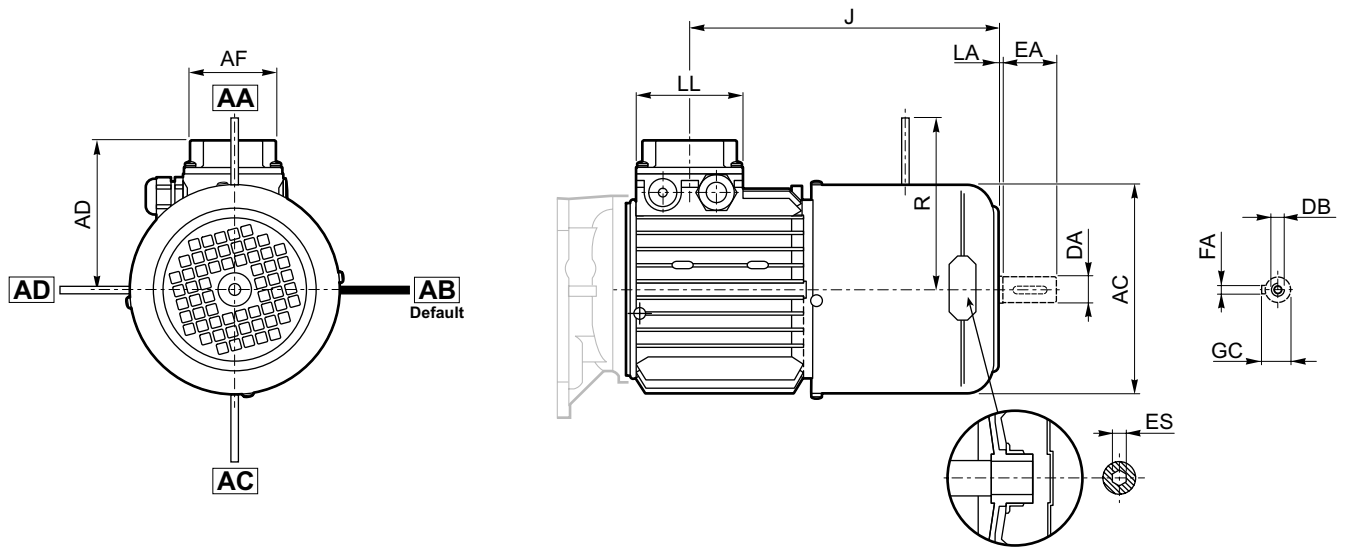

	AC	AD	AF	LL	J	R	DA	EA	LA	DB	GC	FA	ES
M 05	4.76	3.74	2.91	3.15	7.20	4.57	0.43	0.91	0.08	M4	0.49	0.16	0.20
	121	95	74	80	183	116	11	23	2		12.5	4	5
M 1S	5.43	4.25	2.91	3.15	6.02	4.88	0.55	1.18	0.08	M5	0.63	0.20	0.20
	138	108	74	80	153	124	14	30	2		16	5	5
M 1L	5.43	4.25	2.91	3.15	6.89	4.88	0.55	1.18	0.08	M5	0.63	0.20	0.20
	138	108	74	80	175	124	14	30	2		16	5	5
M 2S	6.14	4.69	2.91	3.15	7.24	5.28	0.75	1.57	0.08	M6	0.85	0.24	0.20
	156	119	74	80	184	134	19	40	2		21.5	6	5
M 3S	7.68	5.59	3.86	3.86	7.95	6.30	1.10	2.36	0.12	M10	1.22	0.31	0.24
	195	142	98	98	202	160	28	60	3		31	8	6
M 3L	7.68	5.59	3.86	3.86	9.02	6.30	1.10	2.36	0.12	M10	1.22	0.31	0.24
	195	142	98	98	229	160	28	60	3		31	8	6
M 4S	10.16	7.60	4.65	4.65	10.16	8.54	1.50	3.15	0.12	M14	1.61	0.39	0.24
	258	193	118	118	258	217	38	80	3		41	10	6
M 4L	10.16	7.60	4.65	4.65	11.22	8.54	1.50	3.15	0.12	M14	1.61	0.39	0.24
	258	193	118	118	285	217	38	80	3		41	10	6
M 4LC	10.16	7.60	4.65	4.65	16.97	8.54	1.50	3.15	0.12	M14	1.61	0.39	0.24
	258	193	118	118	431	217	38	80	3		41	10	6
M 5S	12.20	9.21	6.73	7.36	18.94	9.72	1.50	3.15	0.16	M12	1.61	0.39	—
	310	234	171	187	481	247	38	80	4		41	10	—
M 5L	12.20	9.21	6.73	7.36	20.67	9.72	1.50	3.15	0.16	M12	1.61	0.39	—
	310	234	171	187	525	247	38	80	4		41	10	—


NOTE: The hexagonal socket "ES" is not available with the PS option.

Dimensions are $\frac{\text{inch}}{\text{mm}}$

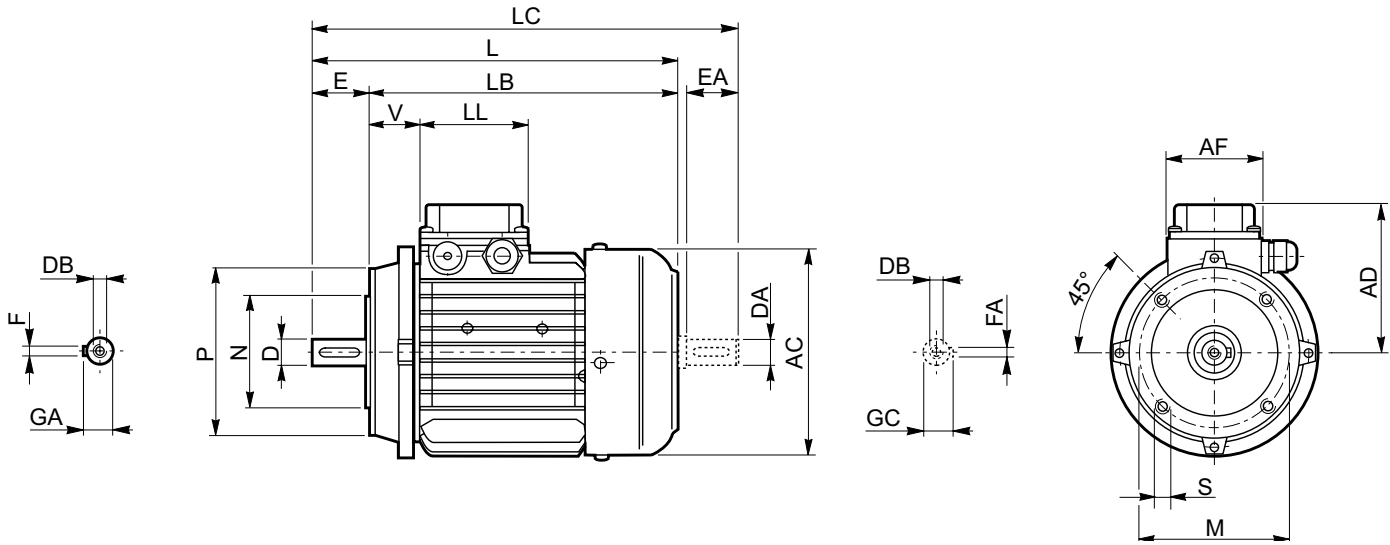


	Shaft					Flange					Motor							
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V
BN 56	0.35 9	0.79 20	M3	0.40 10.2	0.12 3	2.56 65	1.97 50	3.15 80	M5	0.10 2.5	4.33 110	7.28 185	6.50 165	8.15 207	3.58 91	2.91 74	3.15 80	1.34 34
BN 63	0.43 11	0.91 23	M4	0.49 12.5	0.16 4	2.95 75	2.36 60	3.54 90	M5	0.10 2.5	4.76 121	8.15 207	7.24 184	9.13 232	3.74 95	2.91 74	3.15 80	1.02 26
BN 71	0.55 14	1.18 30	M5	0.63 16	0.20 5	3.35 85	2.76 70	4.13 105	M6	0.10 2.5	5.43 138	9.80 249	8.62 219	11.06 281	4.25 108	2.91 74	3.15 80	1.46 37
BN 80	0.75 19	1.57 40	M6	0.85 21.5	0.24 6	3.94 100	3.15 80	4.72 120	M6	0.12 3	6.14 156	10.79 274	9.21 234	12.40 315	4.69 119	2.91 74	3.15 80	1.50 38
BN 90 S	0.94 24	1.97 50	M8	1.06 27	0.31 8	4.53 115	3.74 95	5.51 140	M8	0.12 3	6.93 176	12.83 326	10.87 276	14.88 378	5.24 133	3.86 98	3.86 98	1.73 44
BN 90 L	0.94 24	1.97 50	M8	1.06 27	0.31 8	4.53 115	3.74 95	5.51 140	M8	0.12 3	6.93 176	12.83 326	10.87 276	14.88 378	5.24 133	3.86 98	3.86 98	1.73 44
BN 100	1.10 28	2.36 60	M10	1.22 31	0.31 8	5.12 130	4.33 110	6.30 160	M8	0.14 3.5	7.68 195	14.41 366	12.05 306	16.89 429	5.59 142	3.86 98	3.86 98	1.97 50
BN 112	1.10 28	2.36 60	M10	1.22 31	0.31 8	5.12 130	4.33 110	6.30 160	M8	0.14 3.5	8.62 219	15.16 385	12.80 325	17.64 448	6.18 157	3.86 98	3.86 98	2.05 52
BN 132 S	1.50 38	3.15 80	M12	1.61 41	0.39 10	6.50 165	5.12 130	7.87 200	M10	0.16 4	10.16 258	17.91 455	14.76 375	21.18 538	7.60 193	4.65 118	4.65 118	2.28 58
BN 132 M	1.50 38	3.15 80	M12	1.61 41	0.39 10	6.50 165	5.12 130	7.87 200	M10	0.16 4	10.16 258	19.41 493	16.26 413	22.68 576	7.60 193	4.65 118	4.65 118	2.28 58

1) These values refer to the rear shaft end.

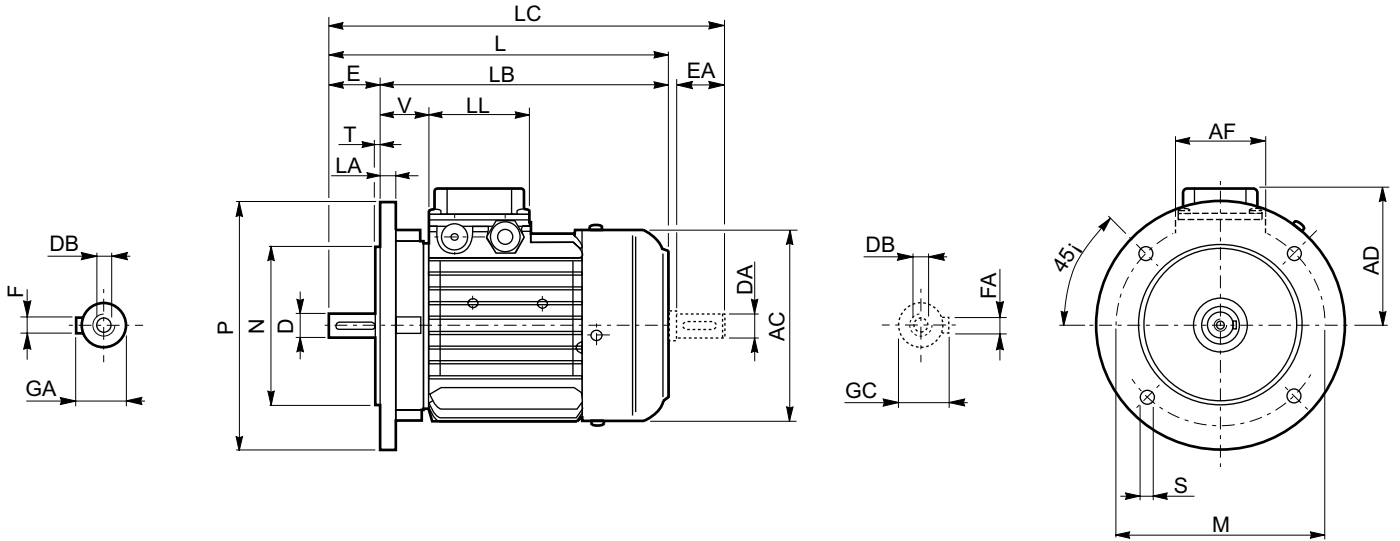

	Shaft					Flange						Motor							
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V
BN 63	0.43 11	0.91 23	M4	0.49 12.5	0.16 4	4.53 115	3.74 95	5.51 140	0.37 9.5	0.12 3	0.39 10	4.76 121	8.15 207	7.24 184	9.13 232	3.74 95	2.91 74	3.15 80	1.02 26
BN 71	0.55 14	1.18 30	M5	0.63 16	0.20 5	5.12 130	4.33 110	6.30 160	0.37 9.5	0.12 3	0.39 10	5.43 138	9.80 249	8.62 219	11.06 281	4.25 108	2.91 74	3.15 80	1.46 37
BN 80	0.75 19	1.57 40	M6	0.85 21.5	0.24 6	6.50 165	5.12 130	7.87 200	0.45 11.5	0.14 3.5	0.45 11.5	6.14 156	10.79 274	9.21 234	12.40 315	4.69 119	2.91 74	3.15 80	1.50 38
BN 90 S BN 90 L	0.94 24	1.97 50	M8	1.06 27	0.31 8	6.50 165	5.12 130	7.87 200	0.45 11.5	0.14 3.5	0.45 11.5	6.93 176	12.83 326	10.87 276	14.88 378	5.24 133	3.86 98	3.86 98	1.73 44
BN 100	1.10 28	2.36 60	M10	1.22 31	0.31 8	8.46 215	7.09 180	9.84 250	0.55 14	0.16 4	0.55 14	7.68 195	14.45 367	12.09 307	16.89 429	5.59 142	3.86 98	3.86 98	1.97 50
BN 112	1.10 28	2.36 60	M10	1.22 31	0.31 8	8.46 215	7.09 180	9.84 250	0.55 14	0.16 4	0.59 15	8.62 219	15.16 385	12.80 325	17.64 448	6.18 157	3.86 98	3.86 98	2.05 52
BN 132 S	1.49 38	3.14 80	M12	1.61 41	0.39 10	10.43 265	9.05 230	11.81 300	0.55 14	0.15 4	0.62 16	10.15 258	17.91 455	14.76 375	21.18 538	7.59 193	4.64 118	4.64 118	2.28 58
BN 132 M	1.49 38	3.14 80	M12	1.61 41	0.39 10	10.43 265	9.05 230	11.81 300	0.55 14	0.15 4	0.62 16	10.15 258	19.40 493	16.25 413	22.67 576	7.59 193	4.64 118	4.64 118	2.28 58
BN 160 MR	1.65 42	4.33 110	M16	1.77 45	0.47 12	11.81	9.84	13.77	0.72	0.19	0.59	10.15	22.12	17.79	25.39	7.59	4.64	4.64	8.58
	1.49 38 (1)	3.14 80 (1)	M12 (1)	1.61 41 (1)	0.39 10 (1)	300	250	350	18.5	5	15	258	562	452	645	193	118	118	218
BN 160 M BN 160 L	1.65 42	4.33 110	M16	1.77 45	0.47 12	11.81	9.84	13.77	0.72	0.19	0.59	1.22	23.46	19.13	26.77	9.64	7.36	7.36	2.00
	1.49 38 (1)	3.14 80 (1)	M12 (1)	1.61 41 (1)	0.39 10 (1)	300	250	350	18.5	5	15	310	596	486	680	245	187	187	51
BN 180 M	1.88 48	4.33 110	M16	2.02 51.5	0.55 14	11.81	9.84	13.77	0.72	0.19	0.59	1.22	25.19	20.86	28.50	9.64	7.36	7.36	2.00
	1.49 38 (1)	4.33 110 (1)	M12 (1)	1.61 41 (1)	0.39 10 (1)	300	250	350	18.5	5	15	310	640	530	724	245	187	187	51
BN 180 L	1.88 48	4.33 110	M16	2.02 51.5	0.55 14	11.81	9.84	13.77	0.72	0.19	0.70	13.70	27.87	23.54	32.40	10.27	7.36	7.36	2.04
	1.65 42 (1)	4.33 110 (1)	M16 (1)	1.77 45 (1)	0.47 12 (1)	300	250	350	18.5	5	18	348	708	598	823	261	187	187	52
BN 200 L	2.16 55	4.33 110	M20	2.32 59	0.62 16	13.77	11.81	15.74	0.72	0.19	0.70	13.70	28.42	24.09	32.95	10.27	7.36	7.36	2.59
	1.65 42 (1)	4.33 110 (1)	M16 (1)	1.77 45 (1)	0.47 12 (1)	350	300	400	18.5	5	18	348	722	612	837	261	187	187	66

1) These values refer to the rear shaft end.

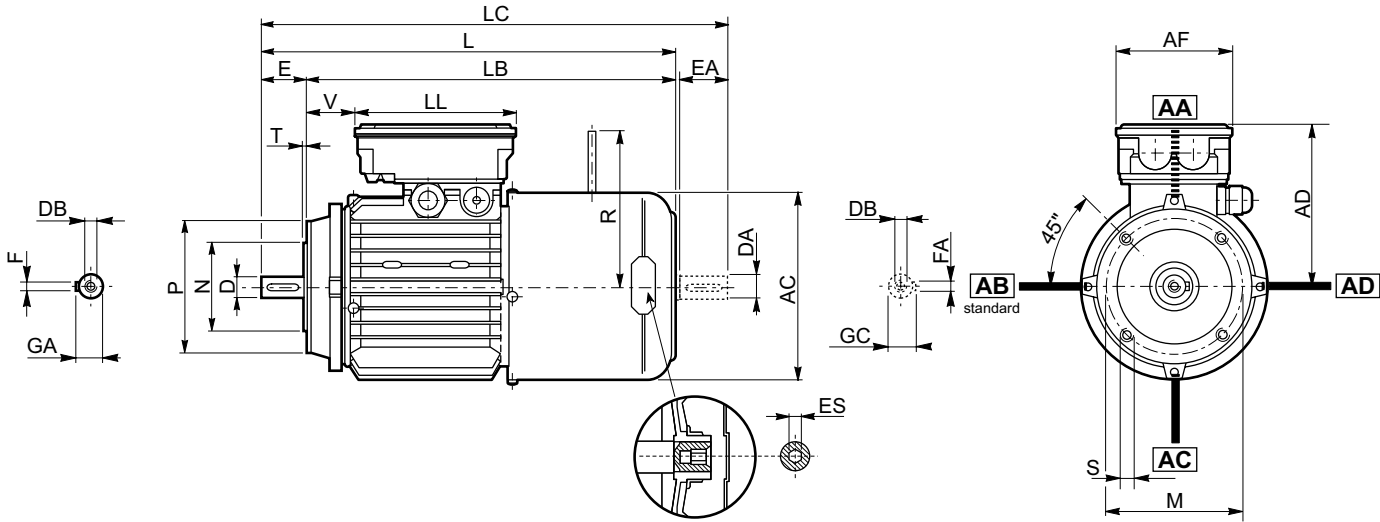


	Shaft					Flange					Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R	ES
BN 63	0.43 11	0.91 23	M4	0.49 12.5	0.16 4	2.95 75	2.36 60	3.54 90	M5	0.10 2.5	4.76 121	10.71 272	9.80 249	11.69 297	4.69 119	3.86 98	5.24 133	0.55 14	3.78 96	0.20 5
BN 71	0.55 14	1.18 30	M5	0.63 16	0.20 5	3.35 85	2.76 70	4.13 105	M6	0.10 2.5	5.43 138	12.20 310	11.02 280	13.46 342	5.20 132	3.86 98	5.24 133	1.18 30	4.06 103	0.20 5
BN 80	0.75 19	1.57 40	M6	0.85 21.5	0.24 6	3.94 100	3.15 80	4.72 120	M6	0.12 3	6.14 156	13.62 346	12.05 306	15.28 388	5.63 143	3.86 98	5.24 133	1.61 41	5.08 129	0.20 5
BN 90 S	0.94 24	1.97 50	M8	1.06 27	0.31 8	4.53 115	3.74 95	5.51 140	M8	0.12 3	6.93 176	16.10 409	14.13 359	18.15 461	5.75 146	4.33 110	6.50 165	1.54 39	5.08 129	0.24 6
BN 90 L	0.94 24	1.97 50	M8	1.06 27	0.31 8	4.53 115	3.74 95	5.51 140	M8	0.12 3	6.93 176	16.10 409	14.13 359	18.15 461	5.75 146	4.33 110	6.50 165	1.54 39	6.30 160	0.24 6
BN 100	1.10 28	2.36 60	M10	1.22 31	0.31 8	5.12 130	4.33 110	6.30 160	M8	0.14 3.5	7.68 195	18.03 458	15.67 398	20.51 521	6.10 155	4.33 110	6.50 165	2.44 62	6.30 160	0.24 6
BN 112	1.10 28	2.36 60	M10	1.22 31	0.31 8	5.12 130	4.33 110	6.30 160	M8	0.14 3.5	8.62 219	19.06 484	16.69 424	21.54 547	6.69 170	4.33 110	6.50 165	2.87 73	7.83 199	0.24 6
BN 132 S	1.50 38	3.15 80	M12	1.61 41	0.39 10	6.50 165	5.12 130	7.87 200	M10	0.16 4	10.16 258	22.24 565	19.09 485	25.51 648	7.60 193	4.65 118	4.65 118	5.59 142	8.03 204 (2)	0.24 6
BN 132 M	1.50 38	3.15 80	M12	1.61 41	0.39 10	6.50 165	5.12 130	7.87 200	M10	0.16 4	10.16 258	23.74 603	20.59 523	27.01 686	7.60 193	4.65 118	4.65 118	7.09 180	8.03 204 (2)	0.24 6

1) These values refer to the rear shaft end.
2) For FD07 brake value R=226

ES hexagon is not supplied with PS option

Dimensions are $\frac{\text{inch}}{\text{mm}}$

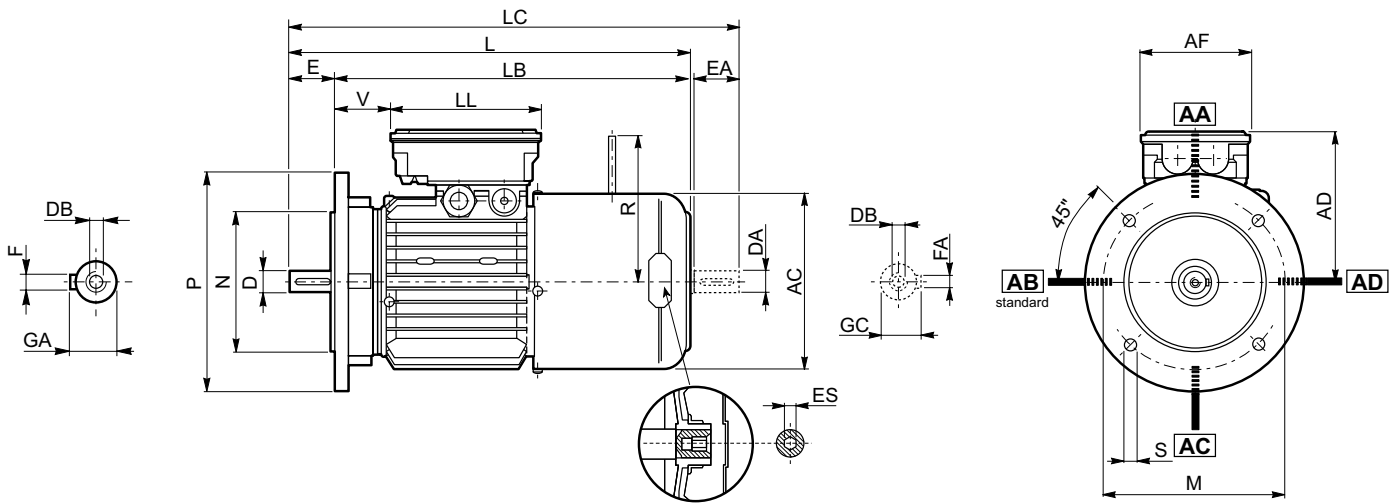


	Shaft				Flange							Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R	ES
BN 63	0.43	0.91	M4	0.49	0.16	4.53	3.74	5.51	0.37	0.12	0.39	4.76	10.71	9.80	11.69	4.69	3.86	5.24	0.55	3.78	0.20
	11	23		12.5	4	115	95	140	9.5	3	10	121	272	249	297	119	98	133	14	96	5
BN 71	0.55	1.18	M5	0.63	0.20	5.12	4.33	6.30	0.37	0.14	0.39	5.43	12.20	11.02	13.46	5.20	3.86	5.24	1.18	4.06	0.20
	14	30		16	5	130	110	160	9.5	3.5	10	138	310	280	342	132	98	133	30	103	5
BN 80	0.75	1.57	M6	0.85	0.24	6.50	5.12	7.87	0.45	0.14	0.45	6.14	13.62	12.05	15.28	5.63	3.86	5.24	1.61	5.08	0.20
	19	40		21.5	6	165	130	200	11.5	3.5	11.5	156	346	306	388	143	98	133	41	129	5
BN 90 S	0.94	1.97	M8	1.06	0.31	6.50	5.12	7.87	0.45	0.14	0.45	6.93	16.10	14.13	18.15	5.75	4.33	6.50	1.54	5.08	0.24
	24	50		27	8	165	130	200	11.5	3.5	11.5	176	409	359	461	146	110	165	39	129	6
BN 90 L	0.94	1.97	M8	1.06	0.31	6.50	5.12	7.87	0.45	0.14	0.45	6.93	16.10	14.13	18.15	5.75	4.33	6.50	1.54	6.30	0.24
	24	50		27	8	165	130	200	11.5	3.5	11.5	176	409	359	461	146	110	165	39	160	6
BN 100	1.10	2.36	M10	1.22	0.31	8.46	7.09	9.84	0.55	0.16	0.55	7.68	18.03	15.67	20.51	6.10	4.33	6.50	2.44	6.30	0.24
	28	60		31	8	215	180	250	14	4	14	195	458	398	521	155	110	165	62	160	6
BN 112	1.10	2.36	M10	1.22	0.31	8.46	7.09	9.84	0.55	0.16	0.59	8.62	19.06	16.69	21.54	6.69	4.33	6.50	2.87	7.83	0.24
	28	60		31	8	215	180	250	14	4	15	219	484	424	547	170	110	165	73	199	6
BN 132 S	1.49	3.14	M12	1.61	0.39	10.43	9.05	11.81	0.55	0.15	0.62	10.15	22.24	19.09	25.51	7.59	4.64	4.64	5.59	8.03	0.23
	38	80		41	10	265	230	300	14	4	16	258	565	485	648	193	118	142	204 (2)	6	
BN 132 M	1.49	3.14	M12	1.61	0.39	10.43	9.05	11.81	0.55	0.15	0.62	10.15	23.74	20.59	27.00	7.59	4.64	4.64	7.08	8.03	0.23
	38	80		41	10	265	230	300	14	4	16	258	603	523	686	193	118	118	180	204 (1)	6
BN 160 MR	1.65	4.33	M16	1.77	0.47	11.81	9.84	13.77	0.72	0.19	0.59	10.15	26.45	22.12	29.72	7.59	4.64	4.64	8.58	8.89	0.23
	42	110		45	12																
BN 160 M	1.49	3.14	M12 (1)	1.61	0.39	11.81	9.84	13.77	0.72	0.19	0.59	1.22	28.97	24.64	32.28	9.64	7.36	7.36	2.00	8.89	
	38 (1)	80 (1)		41 (1)	10 (1)																
BN 160 L	1.65	4.33	M16	1.77	0.47	11.81	9.84	13.77	0.72	0.19	0.59	1.22	30.70	26.37	34.01	9.64	7.36	7.36	2.00	8.89	
	42	110		45	12																
BN 180 M	1.88	4.33	M16	2.02	0.55	11.81	9.84	13.77	0.72	0.19	0.59	1.22	30.70	26.37	34.01	9.64	7.36	7.36	2.00	8.89	
	48	110		51.5	14																
BN 180 L	1.49	3.14	M12 (1)	1.61	0.39	11.81	9.84	13.77	0.72	0.19	0.59	1.22	30.70	26.37	34.01	9.64	7.36	7.36	2.00	8.89	
	38 (1)	80 (1)		41 (1)	10 (1)																
BN 180 L	1.88	4.33	M16	2.02	0.55	11.81	9.84	13.77	0.72	0.19	0.70	13.70	34.09	29.76	38.62	10.27	7.36	7.36	2.04	12.00	
	48	110		51.5	14																
BN 200 L	1.65	4.33	M16 (1)	1.77	0.47	11.81	9.84	13.77	0.72	0.19	0.70	13.70	34.09	29.76	38.62	10.27	7.36	7.36	2.51	12.00	
	42 (1)	110 (1)		45 (1)	12 (1)																
BN 200 L	2.16	4.33	M20	2.32	0.62	13.77	11.81	15.74	0.72	0.19	0.70	13.70	34.56	30.23	39.09	10.27	7.36	7.36	2.51	12.00	
	55	110		59	16																
BN 200 L	1.65	4.33	M16 (1)	1.77	0.47	13.77	11.81	15.74	0.72	0.19	0.70	13.70	34.56	30.23	39.09	10.27	7.36	7.36	2.51	12.00	
	42 (1)	110 (1)		45 (1)	12 (1)																

1) These values refer to the rear shaft end.

ES hexagon is not supplied with PS option

2) For FD07 brake value R=226

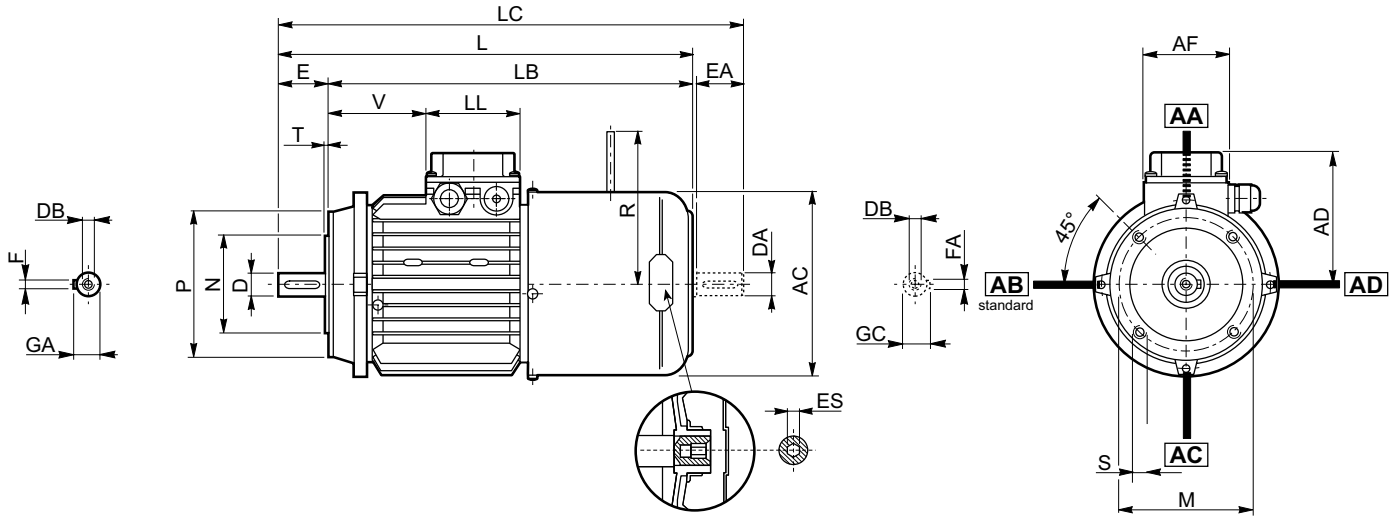

	Shaft					Flange					Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	AC	L	LB	LC	AD	AF	LL	V	R	ES
BN 63	0.43 11	0.91 23	M4	0.49 12.5	0.16 4	2.95 75	2.36 60	3.54 90	M5	0.10 2.5	4.76 121	10.71 272	9.80 249	4.69 119	3.74 95	2.91 74	3.15 80	1.02 26	4.57 116	0.20 5
BN 71	0.55 14	1.18 30	M5	0.63 16	0.20 5	3.35 85	2.76 70	4.13 105	M6	0.10 2.5	5.43 138	12.20 310	11.02 280	13.46 342	4.25 108	2.91 74	3.15 80	2.68 68	4.88 124	0.20 5
BN 80	0.75 19	1.57 40	M6	0.85 21.5	0.24 6	3.94 100	3.15 80	4.72 120	M6	0.12 3	6.14 156	13.62 346	12.05 306	15.28 388	4.69 119	2.91 74	3.15 80	3.27 83	5.28 134	0.20 5
BN 90 S	0.94 24	1.97 50	M8	1.06 27	0.31 8	4.53 115	3.74 95	5.51 140	M8	0.12 3	6.93 176	16.10 409	14.13 359	18.15 461	5.24 133	3.86 98	3.86 98	3.74 95	5.28 134	0.24 6
BN 90 L	0.94 24	1.97 50	M8	1.06 27	0.31 8	4.53 115	3.74 95	5.51 140	M8	0.12 3	6.93 176	16.10 409	14.13 359	18.15 461	5.24 133	3.86 98	3.86 98	3.74 95	6.30 160	0.24 6
BN 100	1.10 28	2.36 60	M10	1.22 31	0.31 8	5.12 130	4.33 110	6.30 160	M8	0.14 3.5	7.68 195	18.03 458	15.67 398	20.51 521	5.59 142	3.86 98	3.86 98	4.69 119	6.30 160	0.24 6
BN 112	1.10 28	2.36 60	M10	1.22 31	0.31 8	5.12 130	4.33 110	6.30 160	M8	0.14 3.5	8.62 219	19.06 484	16.69 424	21.54 547	6.18 157	3.86 98	3.86 98	5.04 128	7.80 198	0.24 6
BN 132 S	1.50 38	3.15 80	M12	1.61 41	0.39 10	6.50 165	5.12 130	7.87 200	M10	0.16 4	10.16 258	22.24 565	19.09 485	25.51 648	7.60 193	4.65 118	4.65 118	5.59 142	7.87 200 (2)	0.24 6
BN 132 M	1.50 38	3.15 80	M12	1.61 41	0.39 10	6.50 165	5.12 130	7.87 200	M10	0.16 4	10.16 258	23.74 603	20.59 523	27.01 686	7.60 193	4.65 118	4.65 118	7.09 180	7.87 200 (2)	0.24 6


1) These values refer to the rear shaft end.

2) For FD07 brake value R=226

ES hexagon is not supplied with PS option.

For motors type BN..FA, the terminal box sizes AD, AF, LL, V are the same as for BN..FD.

Dimensions are $\frac{\text{inch}}{\text{mm}}$

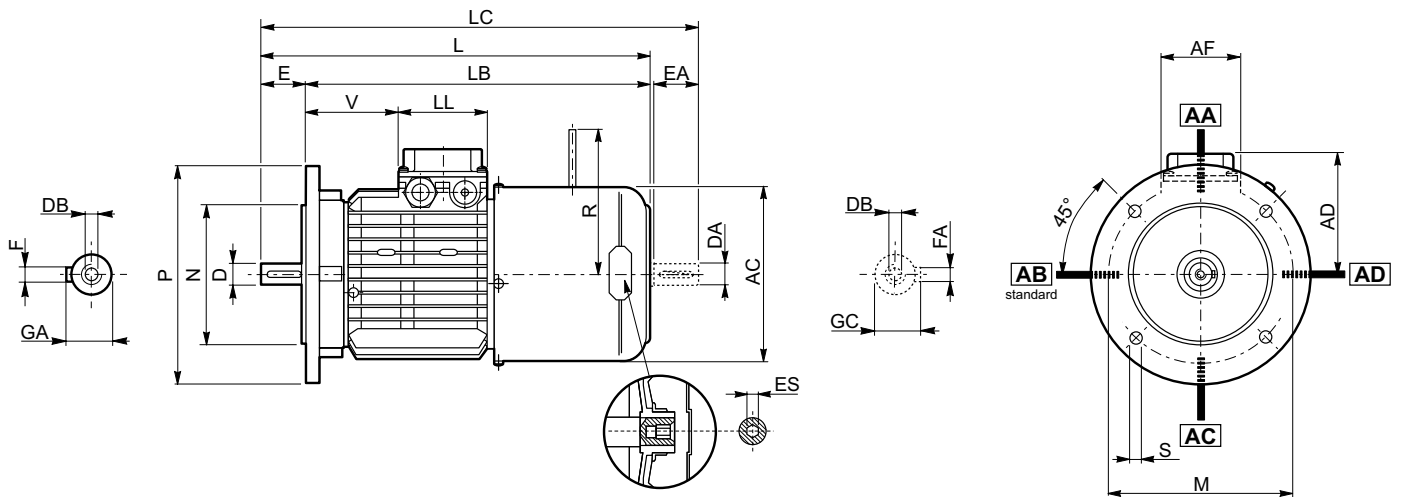

	Shaft					Flange						Motor									
	D DA	E EA	DB	GA GC	F FA	M	N	P	S	T	LA	AC	L	LB	LC	AD	AF	LL	V	R	ES
BN 63	0.43 11	0.91 23	M4	0.49 12.5	0.16 4	4.53 115	3.74 95	5.51 140	0.37 9.5	0.12 3	0.39 10	4.76 121	10.71 272	9.80 249	11.69 297	3.74 95	2.91 74	3.15 80	1.02 26	4.57 116	0.20 5
BN 71	0.55 14	1.18 30	M5	0.63 16	0.20 5	5.12 130	4.33 110	6.30 160	0.37 9.5	0.14 3.5	0.39 10	5.43 138	12.20 310	11.02 280	13.46 342	4.25 108	2.91 74	3.15 80	2.68 68	4.88 124	0.20 5
BN 80	0.75 19	1.57 40	M6	0.85 21.5	0.24 6	6.50 165	5.12 130	7.87 200	0.45 11.5	0.14 3.5	0.45 11.5	6.14 156	13.62 346	12.05 306	15.28 388	4.69 119	2.91 74	3.15 80	3.27 83	5.28 134	0.20 5
BN 90 S	0.94 24	1.97 50	M8	1.06 27	0.31 8	6.50 165	5.12 130	7.87 200	0.45 11.5	0.14 3.5	0.45 11.5	6.93 176	16.10 409	14.13 359	18.15 461	5.24 133	3.86 98	3.86 98	3.74 95	5.28 134	0.24 6
BN 90 L	0.94 24	1.97 50	M8	1.06 27	0.31 8	6.50 165	5.12 130	7.87 200	0.45 11.5	0.14 3.5	0.45 11.5	6.93 176	16.10 409	14.13 359	18.15 461	5.24 133	3.86 98	3.86 98	3.74 95	6.30 160	0.24 6
BN 100	1.10 28	2.36 60	M10	1.22 31	0.31 8	8.46 215	7.09 180	9.84 250	0.55 14	0.16 4	0.55 14	7.68 195	18.03 458	15.67 398	20.51 521	5.59 142	3.86 98	3.86 98	4.69 119	6.30 160	0.24 6
BN 112	1.10 28	2.36 60	M10	1.22 31	0.31 8	8.46 215	7.09 180	9.84 250	0.55 14	0.16 4	0.59 15	8.62 219	19.06 484	16.69 424	21.54 547	6.18 157	3.86 98	3.86 98	5.04 128	7.80 198	0.24 6
BN 132 S	1.49 38	3.14 80	M12	1.61 41	0.39 10	10.43 265	9.05 230	11.81 300	0.55 14	0.15 4	0.62 16	10.15 258	22.24 565	19.09 485	25.51 648	7.59 193	4.64 118	4.64 118	5.59 142	7.87 200(2)	0.23 6
BN 132 M	1.49 38	3.14 80	M12	1.61 41	0.39 10	10.43 265	9.05 230	11.81 300	0.55 14	0.15 4	0.62 16	10.15 258	23.74 603	20.59 523	27.00 686	7.59 193	4.64 118	4.64 118	7.08 180	7.87 200(1)	0.23 6
BN 160 MR	1.65 42	4.33 110	M16	1.77 45	0.47 12	11.81 300	9.84 250	13.77 350	0.72 18.5	0.19 5	0.59 15	10.15 258	26.45 672	22.12 562	29.72 755	7.59 193	4.64 118	4.64 118	8.58 218	8.54 217	0.23 6
	1.49 38(1)	3.14 80(1)	M12(1)	1.61 41(1)	0.39 10(1)																
BN 160 M BN 160 L	1.65 42	4.33 110	M16	1.77 45	0.47 12	11.81 300	9.84 250	13.77 350	0.72 18.5	0.19 5	0.59 15	1.22 310	28.97 736	24.64 626	32.28 820	9.64 245	7.36 187	7.36 187	2.00 51	9.72 247	
	1.49 38(1)	3.14 80(1)	M12(1)	1.61 41(1)	0.39 10(1)																
BN 180 M	1.88 48	4.33 110	M16	2.02 51.5	0.55 14	11.81 300	9.84 250	13.77 350	0.72 18.5	0.19 5	0.59 15	1.22 310	30.70 780	26.37 670	34.01 864	9.64 245	7.36 187	7.36 187	2.00 51	9.72 247	
	1.49 38(1)	3.14 80(1)	M12(1)	1.61 41(1)	0.39 10(1)																

1) These values refer to the rear shaft end.

2) For FD07 brake value R=226

ES hexagon is not supplied with PS option.

For motors type BN..FA, the terminal box sizes AD, AF, LL, V are the same as for BN..FD.

R2

58
60

Replaced motor BN 112M 4 with motor BN 100LC 4.

243

Data for BN 112M4 added in the rating chart.